Edition 1

one
LIGHT

Lighting Catalogue
2018




one
LIGHT

Message from our CEO

Dear Customers,

I warmly invite you to explore our new ONE Light catalogue 2018.

The growth of LED technology is showing no signs of slowing down in the lighting industry and it seems is here to stay. 90% of the products we are offering are using LED technology.

2017 has been another fantastic year for our company, with a 15% increase in annual sales and a new record of distributors in 65 countries worldwide.

Thank you for your ongoing interest in ONE Light, your trust and support. We are looking forward to maintain a strong business relationship with you in the years to come.

Yiotis Demetriou
CEO
ONE Light Ltd



"Do it with passion or forget it!"

The Company

Founded in 2011 ONE Light supplies technical lighting to retailers, wholesalers and distributor partners across 65 countries globally. ONE Light specialises in modern design LED lighting offering quality at affordable prices.



Warehouse

Operating from it's modern 5000m^2 warehouse, ONE Light provides 99% stock availability on all catalogue products. All orders can be prepared for dispatch within 24hours.



Graphics Department

Our graphics department designs every single product package and catalogues. All item photos are taken in our own photo studio.





Technical Department

ONE Light products are tested to meet the technical and quality standards demanded by our international customers.



Online Catalogue Order

To get a copy of our latest catalogue fill in the application form on our website.



I would like to receive the ONE Light catalogue:

Name *

Company Name

Company Website

Email address *

Tel No.

Country *

–

Profession *

- Lighting retailer (Shop)
- Lighting wholesaler / distributor
- Lighting installer / electrician
- Architect / Designer
- Private use
- Other

Type verification code *

5149

ORDER

Why ONE Light?

Choose ONE Light as your lighting partner.

1-DAY Delivery

Have your lighting products the moment you need them. ONE Light's fast delivery service promises shipment within 24hours from order confirmation. Our exports staff will quote the best freight rate for your orders. We offer competitive worldwide sea and air freight rates.





99% Stock Availability

ONE Light's capability of immediate delivery is based on the fact that 99% of all catalogue items are in stock and ready for delivery from our new 5000m^2 warehouse.

Packaging

ONE Light's new packaging is fresh and eye catching, designed to clearly display the information and the product. The ranges are colour coded for easy identification and to stand out on the shelf.

LED HALO FLUO HQI



Products

With over 2000 product codes covering the majority of your technical lighting needs, ONE Light provides a one stop solution to satisfy most of the customers searching for quality lighting.

B2B Customer Login

All the info you need to know.. on your screen with a touch of a button.

Online Features

Connect with our B2B customer login application on our website to access all the information you will need to work with ONE Light.



Info On B2B Application



- Product availability & arrival dates
- Open orders
- Photos
- Product data sheets
- Installation manuals
- IES files
- CE certificates
- Account statements

www.1-light.eu

Symbols

Decoding our catalogue.



CLASS PROTECTION

INDOOR/OUTDOOR INSTALLATION

EUROPEAN CONFORMITY MARK

MOUNTING POSITION

IP RATING

IP20



ROTATION RANGE

ADJUSTABLE ADJUSTABLE

COLOUR RENDERING INDEX

80 CRI

DARK LIGHT

DARK LIGHT

IMPACT PROTECTION RATING

IK08

PIECES PER BOX

DIMMABLE

DIMMABLE

SENSOR

CEILING DEPTH REQUIRED

CUTOUT HOLE

LIGHT DISTRIBUTION & BEAM ANGLE

30°

PUSH TO DIM

PUSH TO DIM

CABLE LENGTH

FAST CONNECTION

QUICK FIX

MAXIMUM UNDERWATER DEPTH

1m max

Colour Codes

Decoding our colours.





AN
ANTHRACITE



C
CHROME



AL
ALUMINIUM



BR
RUST BROWN



MC
BRUSHED CHROME



G
GREY



W
WHITE

B
BLACK



ABS
ANTIQUE BRASS



BBS
BRUSHED BRASS



BS
BRASS




N
NATURAL

one

NEW PRODUCTS 2018

EDITION 2

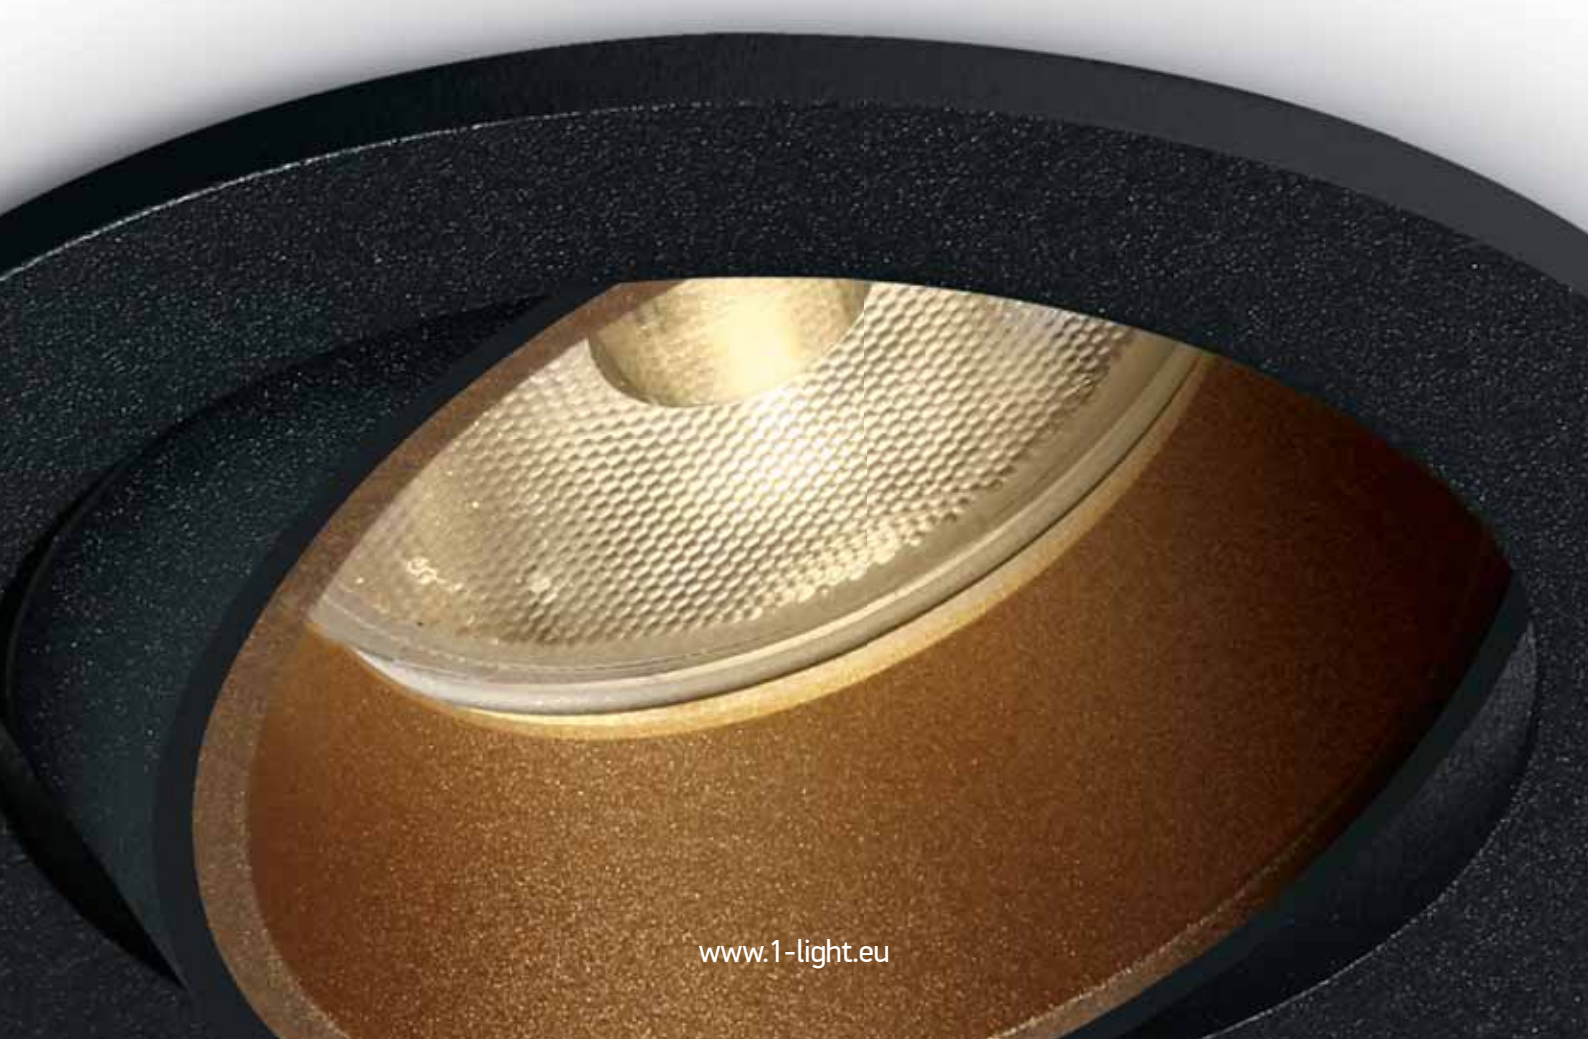

www.1-light.eu



10105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

IP20 DARK LIGHT

CE







10105M/W/W



10105M/W/B



10105M/W/BS



10105M/W/CU



10105M/B/W



10105M/B/B



10105M/B/BS



10105M/B/CU

Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105M/W/W	White	White	10W	100-240V		15cm	70mm	120mm	100	-
10105M/W/B	White	Black	10W	100-240V		15cm	70mm	120mm	100	-
10105M/W/BS	White	Brass	10W	100-240V		15cm	70mm	120mm	100	-
10105M/W/CU	White	Copper	10W	100-240V		15cm	70mm	120mm	100	-
10105M/B/W	Black	White	10W	100-240V		15cm	70mm	120mm	100	-
10105M/B/B	Black	Black	10W	100-240V		15cm	70mm	120mm	100	-
10105M/B/BS	Black	Brass	10W	100-240V		15cm	70mm	120mm	100	-
10105M/B/CU	Black	Copper	10W	100-240V		15cm	70mm	120mm	100	-




10105MD | 10W | MR16 | GU10 | Aluminium body + plastic reflector

IP20 DARK LIGHT

CE







10105MD/W/B



10105MD/W/BS




10105MD/B/B



10105MD/B/BS

Order Code	Colour	Reflector	Watts	Input	Class					Notes
10105MD/W/B	White	Black	10W	100-240V		15cm	70mm	120mm	100	-
10105MD/W/BS	White	Brass	10W	100-240V		15cm	70mm	120mm	100	-
10105MD/B/B	Black	Black	10W	100-240V		15cm	70mm	120mm	100	-
10105MD/B/BS	Black	Brass	10W	100-240V		15cm	70mm	120mm	100	-



50105M/W/BS

50105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector


IP20

DARK LIGHT CE



50105M/W/CU









50105M/B/W



50105M/B/B



50105M/B/BS



50105M/B/CU

Order Code	Colour	Reflector	Watts	Input	Class					Notes
50105M/W/BS	White	Brass	10W	100-240V		15cm	76x76mm	130mm	100	-
50105M/W/CU	White	Copper	10W	100-240V		15cm	76x76mm	130mm	100	-
50105M/B/W	Black	White	10W	100-240V		15cm	76x76mm	130mm	100	-
50105M/B/B	Black	Black	10W	100-240V		15cm	76x76mm	130mm	100	-
50105M/B/BS	Black	Brass	10W	100-240V		15cm	76x76mm	130mm	100	-
50105M/B/CU	Black	Copper	10W	100-240V		15cm	76x76mm	130mm	100	-



50105MA/W/W

50105MA | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Assymetric for shelf illumination.

IP20


DARK LIGHT CE



50105MA/B/B



Assymetric





Order Code	Colour	Reflector	Watts	Input	Class					Notes
50105MA/W/W	White	White	10W	100-240V		15cm	76x76mm	150mm	100	Assymetric
50105MA/W/B	White	Black	10W	100-240V		15cm	76x76mm	150mm	100	Assymetric
50105MA/B/B	Black	Black	10W	100-240V		15cm	76x76mm	150mm	100	Assymetric



10105TR/W

10105TR | 50W | MR16 | GU10 | Trimless | Aluminium

IP20


DARK LIGHT



10105TR/B



10105TR/BS



Order Code	Colour	Watts	Input	Class					Notes
10105TR/W	White	50W	100-240V		15cm	65mm	120mm	60	-
10105TR/B	Black	50W	100-240V		15cm	65mm	120mm	60	-
10105TR/BS	Brass	50W	100-240V		15cm	65mm	120mm	60	-



10105RM + 050099/B


10105RM | 10W | MR16 | GU10 | Trimless | Die cast body + plastic reflector

Reflector must be ordered separately.

IP20

DARK LIGHT







050099/W White



050099/G Grey



050099/C Chrome



050099/BS Brass




050099/GL Gold



050099/CU Copper

Order Code	Colour	Watts	Input	Class					Notes
10105RM	White	10W	100-240V		15cm	85mm	130mm	60	-

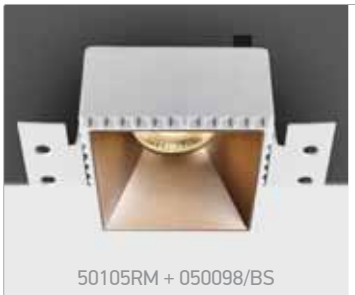

50105RM + 050098/BS


50105RM | 10W | MR16 | GU10 | Trimless | Die cast body + plastic reflector

Reflector must be ordered separately.

IP20

DARK LIGHT







050098/W White




050098/B Black



050098/G Grey



050098/C Chrome



050098/GL Gold



050098/CU Copper

Order Code	Colour	Watts	Input	Class					Notes
50105RM	White	10W	100-240V		15cm	75x75mm	130mm	60	-

10107K | 7W | COB LED | Aluminium

Ring must be ordered separately.

IP20 80 CRI

DIMMABLE QUICK FIX DARK LIGHT CE



10107K/W/W + 050104/B



10107K/B/W + 050104/BS





050104/W White



050104/B Black



050104/C Chrome



050104/BS Brass



050104/CU Copper


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107K/W/W	White	Warm white	3000K	7W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver
10107K/B/W	Black	Warm white	3000K	7W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver

10103P | 1W/3W | COB LED | Aluminium

IP65

DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103P/B/BL	Black	Blue	-	1W/3W	-	60°	350mA/700mA	III	60cm	37mm	60mm	100	Requires 350mA/700mA driver

10107P | 7W | COB LED | Die cast

IP64 80 CRI

DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107P/W/W	White	Warm white	3000K	7W	630lm	40°	700mA	III	40cm	70mm	105mm	50	Requires 700mA driver

10107WP | 7W | COB LED | Die cast

IP44 80 CRI

DIMMABLE QUICK FIX DARK LIGHT CE



10107WP/W/W



10107WP/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107WP/W/W	White	Warm white	3000K	7W	500lm	38°	700mA	III	40cm	56mm	100mm	50	Requires 700mA driver
10107WP/B/W	Black	Warm white	3000K	7W	500lm	38°	700mA	III	40cm	56mm	100mm	50	Requires 700mA driver



11105M/W/BS

11105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

IP20 DARK LIGHT

ADJUSTABLE CE







11105M/W/W



11105M/W/B



11105M/W/CU



11105M/B/BS



11105M/B/CU

Order Code	Colour	Reflector	Watts	Input	Class					Notes
11105M/W/W	White	White	10W	100-240V		15cm	70mm	120mm	100	-
11105M/W/B	White	Black	10W	100-240V		15cm	70mm	120mm	100	-
11105M/W/BS	White	Brass	10W	100-240V		15cm	70mm	120mm	100	-
11105M/W/CU	White	Copper	10W	100-240V		15cm	70mm	120mm	100	-
11105M/B/BS	Black	Brass	10W	100-240V		15cm	70mm	120mm	100	-
11105M/B/CU	Black	Copper	10W	100-240V		15cm	70mm	120mm	100	-



51105TA/W

51105TA | 50W | MR16 | GU10 | Metal

IP20

ADJUSTABLE DARK LIGHT CE



51105TA/B



51105TA/G



Order Code	Colour	Watts	Input	Class					Notes
51105TA/W	White	50W	100-240V		15cm	80x80mm	150mm	36	-
51105TA/B	Black	50W	100-240V		15cm	80x80mm	150mm	36	-
51105TA/G	Grey	50W	100-240V		15cm	80x80mm	150mm	36	-

11104K | 3W/5W | COB LED | Aluminium

3W@350mA/5W@500mA | Ring must be ordered separately.



11104K/W/W + 050100/B

IP20 80 CRI ADJUSTABLE

DIMMABLE QUICK FIX DARK LIGHT CE



11104K/B/W + 050100/BS





050100/W White



050100/B Black



050100/C Chrome



050100/BS Brass



050100/CU Copper

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11104K/W/W	White	Warm white	3000K	3W/5W	400lm@5W	35°	350mA/500mA	III	40cm	60mm	80mm	50	Requires 350mA/500mA driver
11104K/B/W	Black	Warm white	3000K	3W/5W	400lm@5W	35°	350mA/500mA	III	40cm	60mm	80mm	50	Requires 350mA/500mA driver

11107K | 7W | COB LED | Aluminium

Ring must be ordered separately.



11107K/W/W + 050102/B

IP20 80 CRI ADJUSTABLE

DIMMABLE QUICK FIX DARK LIGHT CE



11107K/B/W + 050102/BS





050102/W White



050102/B Black



050102/C Chrome



050102/BS Brass



050102/CU Copper

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107K/W/W	White	Warm white	3000K	7W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver
11107K/B/W	Black	Warm white	3000K	7W	550lm	35°	700mA	III	40cm	76mm	100mm	30	Requires 700mA driver




11103E | 3W | COB LED | Aluminium

IP20 90 CRI ADJUSTABLE

DIMMABLE QUICK FIX DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103E/W/W	White	Warm white	3000K	3W	250lm	24°	350mA	III	40cm	40mm	60mm	100	Requires 350mA driver



11112DL | 12W | COB LED | Aluminium

IP20 80 CRI ADJUSTABLE

DIMMABLE QUICK FIX DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11112DL/B/W	Black	Warm white	3000K	12W	900lm	24°	700mA	III	40cm	75mm	140mm	50	Requires 700mA driver



11107DL | 7W | COB LED | Aluminium

IP20 80 CRI ADJUSTABLE

DIMMABLE QUICK FIX DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107DL/B/W	Black	Warm white	3000K	7W	450lm	38°	700mA	III	40cm	60mm	100mm	50	Requires 700mA driver

10140P | 40W | COB LED | Aluminium




IP20 80 CRI

DARK LIGHT CE



Optional black ring.
Order code 050097/B.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10140P/W/C	White	Cool white	4000K	40W	3400lm	60°	230V	☐	190mm	150mm	12	Complete with driver 1000mA
10140P/W/W	White	Warm white	3000K	40W	3200lm	60°	230V	☐	190mm	150mm	12	Complete with driver 1000mA

LED Strips & Profiles



7904ATR/AL | 2m Trimless profile + PC opal diffuser | Aluminium | Suitable for up to 20mm LED Strips


12

CE



Complete with 2 pairs end cups.

26x2000mm





7906TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium | Suitable for up to 37mm LED Strips


12

CE



Complete with 2 pairs end cups.

50x2000mm



Track Spots



65020T/B/C


65020T | 20W | SMD 3030 | Die cast

IP20 80 CRI

ADJUSTABLE CE



65020T/W/C





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65020T/W/C	White	Cool white	4000K	20W	1500lm	24°	230V	⏚	20	Complete with driver
65020T/W/W	White	Warm white	3000K	20W	1400lm	24°	230V	⏚	20	Complete with driver
65020T/B/C	Black	Cool white	4000K	20W	1500lm	24°	230V	⏚	20	Complete with driver
65020T/B/W	Black	Warm white	3000K	20W	1400lm	24°	230V	⏚	20	Complete with driver



65642AT/W/C

65642AT | 10W | COB LED | Aluminium


IP20 80 CRI

ADJUSTABLE CE





65642AT/B/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65642AT/W/C	White	Cool white	4000K	10W	850lm	38°	230V		24	Complete with driver
65642AT/W/W	White	Warm white	3000K	10W	800lm	38°	230V		24	Complete with driver
65642AT/B/C	Black	Cool white	4000K	10W	850lm	38°	230V		24	Complete with driver
65642AT/B/W	Black	Warm white	3000K	10W	800lm	38°	230V		24	Complete with driver



65642BT/W/C

65642BT | 20W | COB LED | Aluminium


IP20 80 CRI

ADJUSTABLE CE





65642BT/B/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65642BT/W/C	White	Cool white	4000K	20W	1700lm	38°	230V		24	Complete with driver
65642BT/W/W	White	Warm white	3000K	20W	1600lm	38°	230V		24	Complete with driver
65642BT/B/C	Black	Cool white	4000K	20W	1700lm	38°	230V		24	Complete with driver
65642BT/B/W	Black	Warm white	3000K	20W	1600lm	38°	230V		24	Complete with driver



65642CT/W/C

65642CT | 30W | COB LED | Aluminium


IP20 80 CRI

ADJUSTABLE CE





65642CT/B/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65642CT/W/C	White	Cool white	4000K	30W	2600lm	38°	230V		15	Complete with driver
65642CT/W/W	White	Warm white	3000K	30W	2400lm	38°	230V		15	Complete with driver
65642CT/B/C	Black	Cool white	4000K	30W	2600lm	38°	230V		15	Complete with driver
65642CT/B/W	Black	Warm white	3000K	30W	2400lm	38°	230V		15	Complete with driver

12105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector

Reflector must be ordered separately.




12105M/B + 050112/BS

IP20

DARK LIGHT



12105M/W + 050112/B





050112/W White



050112/B Black



050112/G Grey



050112/BS Brass



050112/GL Gold



050112/CU Copper

Order Code	Colour	Watts	Input	Class		Notes
12105M/W	White	10W	100-240V		20	-
12105M/B	Black	10W	100-240V		20	-

67426 | 7W | MR16 | GU10 | Die cast



67426/AN


IP65



67426/W



67426/G



Order Code	Colour	Watts	Input	Class		Notes
67426/W	White	7W	100-240V		18	-
67426/G	Grey	7W	100-240V		18	-
67426/AN	Anthracite	7W	100-240V		18	-

67426A | 2x7W | MR16 | GU10 | Die cast



67426A/AN


IP65



67426A/W



67426A/G



Order Code	Colour	Watts	Input	Class		Notes
67426A/W	White	2x7W	100-240V		12	-
67426A/G	Grey	2x7W	100-240V		12	-
67426A/AN	Anthracite	2x7W	100-240V		12	-



67420/W

67420 | 15W | E27 | Die cast + frosted glass

IP54


CE



67420/G



67420/AN





Order Code	Colour	Watts	Input	Class		Notes
67420/W	White	15W	100-240V		6	-
67420/G	Grey	15W	100-240V		6	-
67420/AN	Anthracite	15W	100-240V		6	-



67420A/W

67420A | 15W | E27 | Die cast + frosted glass

IP54


CE



67420A/G



67420A/AN





Order Code	Colour	Watts	Input	Class		Notes
67420A/W	White	15W	100-240V		6	-
67420A/G	Grey	15W	100-240V		6	-
67420A/AN	Anthracite	15W	100-240V		6	-



67420B/W

67420B | 2x12W | E27 | Die cast + frosted glass

IP54


CE



67420B/G



67420B/AN





Order Code	Colour	Watts	Input	Class		Notes
67420B/W	White	2x12W	100-240V		4	-
67420B/G	Grey	2x12W	100-240V		4	-
67420B/AN	Anthracite	2x12W	100-240V		4	-




12108FD | 8W | SMD 2835 | Die cast

IP20 80 CRI

DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
12108FD/W/W	White	Warm white	3000K	8W	560lm	230V	⏚	36	Complete with driver 300mA




12116FD | 16W | SMD 2835 | Die cast

IP20 80 CRI

DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
12116FD/W/W	White	Warm white	3000K	16W	1100lm	230V	⏚	20	Complete with driver 300mA



65110E | 3x10W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65110E/W/W	White	Warm white	3000K	3x10W	3x900lm	60°	230V	⏚	4	Complete with driver




65110F | 4x10W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65110F/W/W	White	Warm white	3000K	4x10W	4x900lm	60°	230V	⏚	4	Complete with driver



12107K/B/W + 050106/BS

12107K | 7W | COB LED | Aluminium


Ring must be ordered separately.

IP20 80 CRI

CE



12107K/W/W + 050106/B







050106/W White



050106/B Black



050106/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12107K/W/W	White	Warm white	3000K	7W	500lm	35°	230V		30	AC LED
12107K/B/W	Black	Warm white	3000K	7W	500lm	35°	230V		30	AC LED



12107KA/B/W + 050106/BS

12107KA | 7W | COB LED | Aluminium


Ring must be ordered separately.

IP20 80 CRI

CE



12107KA/W/W + 050106/B







050106/W White




050106/B Black



050106/BS Brass

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12107KA/W/W	White	Warm white	3000K	7W	500lm	35°	230V		30	AC LED
12107KA/B/W	Black	Warm white	3000K	7W	500lm	35°	230V		30	AC LED

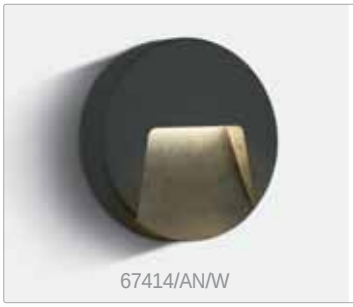

67414/AN/W

67414 | 3W | SMD 2835 | ABS + PC

IP65 80 CRI

DARK LIGHT CE


67414/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67414/W/W	White	Warm white	3000K	3W	100lm	230V		40	-
67414/AN/W	Anthracite	Warm white	3000K	3W	100lm	230V		40	-



67416/AN/W

67416 | 3W | SMD 2835 | ABS + PC


IP65 80 CRI

DARK LIGHT CE


67416/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67416/W/W	White	Warm white	3000K	3W	100lm	230V		40	-
67416/AN/W	Anthracite	Warm white	3000K	3W	100lm	230V		40	-

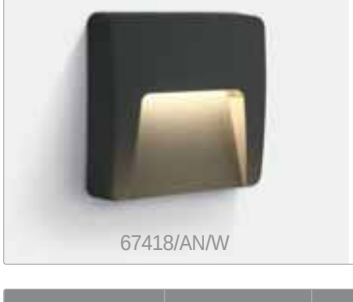

67418/AN/W

67418 | 3W | SMD 2835 | ABS + PC

IP65 80 CRI

DARK LIGHT CE


67418/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67418/W/W	White	Warm white	3000K	3W	100lm	230V		40	-
67418/AN/W	Anthracite	Warm white	3000K	3W	100lm	230V		40	-



67422/W/W

67422 | 6W | COB LED | Die cast

IP54 80 CRI

CE


67422/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67422/W/W	White	Warm white	3000K	6W	400lm	230V	⏚	24	Complete with driver
67422/AN/W	Anthracite	Warm white	3000K	6W	400lm	230V	⏚	24	Complete with driver



67422A/W/W

67422A | 2x6W | COB LED | Die cast

IP54 80 CRI

CE


67422A/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67422A/W/W	White	Warm white	3000K	2x6W	2x400lm	230V	⏚	12	Complete with driver
67422A/AN/W	Anthracite	Warm white	3000K	2x6W	2x400lm	230V	⏚	12	Complete with driver

Decorative


61072/W

61072 | 6W | SMD 2835 | Dimmable | ABS

IP20 ADJUSTABLE

DIMMABLE CE


61072/B



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61072/W	White	Cool white	4000K	6W	200lm	100-240V	☐	10	USB charging socket
61072/B	Black	Cool white	4000K	6W	200lm	100-240V	☐	10	USB charging socket




9C002 | LED | Flickering flame | Wax

Batteries not included.

IP20

CE




Order Code	Colour	Battery		Notes
9C002/F	Extra warm white	2xC	24	Wax with aroma



65110P | 4x10W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65110P/W/W	White	Warm white	3000K	4x10W	4x900lm	60°	230V	⏚	2	Complete with driver



63105M/B + 050112/W

63105M | 10W | MR16 | GU10 | Aluminium body + plastic reflector


Reflector must be ordered separately.

IP20

DARK LIGHT



63105M/W + 050112/GL







050112/W White



050112/B Black



050112/G Grey



050112/BS Brass



050112/GL Gold



050112/CU Copper

Order Code	Colour	Watts	Input	Class		Notes
63105M/W	White	10W	100-240V	⏚	12	-
63105M/B	Black	10W	100-240V	⏚	12	-




69016B | 3W | LED | Aluminium

IP67 80 CRI

CE



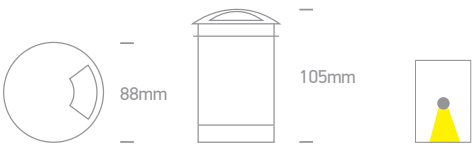

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69016B/W	Aluminium	Warm white	3000K	3W	100lm	100-240V	⏚	200cm	77mm	105mm+300mm drainage	18	Complete with driver




69046G | 10W | MR16 | GU10 | Stainless steel 316

Removable light guide.

IP67 ADJUSTABLE

CE





Order Code	Colour	Watts	Input	Class					Notes
69046G	Stainless steel	10W	100-240V	⏚	200cm	115mm	160mm+300mm drainage	12	2 glands




69048G | 10W | MR16 | GU10 | Stainless steel 316

Removable light guide.

IP67 ADJUSTABLE

CE



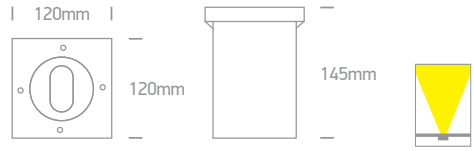

Order Code	Colour	Watts	Input	Class					Notes
69048G	Stainless steel	10W	100-240V	⏚	200cm	115mm	160mm+300mm drainage	12	2 glands



67428 | 2,2W | LED | Solar powered | Sensor | Die cast

IP54 80 CRI



Supplied with spike.



LED 100% when movement detected.
LED 15% when no movement detected.

PIR Sensor: Distance up to 6m and within angle 120°
Charging time: 6-8Hrs (solar)
Working time: 2,5-3Hrs in 100% LED brightness
20-25Hrs in 15% LED brightness

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)		Notes
67428/AN/W	Anthracite	Warm white	3000K	2,2W	200lm	4	1x2200mAh lithium battery

Emergency Lights



67284LE | 25W | SMD 2835 | Emergency 3Hrs Maintained | PC

IP65 80 CRI



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Battery Duration		Notes
67284LE/W/C	White	Cool white	4000K	25W	1900lm	230V	☐	3Hrs	12	Supplied with battery



89150VL | 150W | 24V DC

Suitable for LED profiles on page 218, 220, 221.

IP20

CE



Order Code	Input	Power	Output	Class	Dimmable		Notes
89150VL	230V	150W	24V DC	⧈	NO	25	-



89075L | 75W | 24V DC | DALI, Push to DIM, 1-10V | Dimmable

PUSH TO DIM | DALI DIMMABLE | 1-10V DIMMABLE

IP20 CE DALI



Order Code	Input	Power	Output	Class	Dimmable		Notes
89075L	230V	75W	24V DC	⧈	Yes	24	DALI, Push to DIM, 1-10V



89150V | 150W | 24V DC

IP20

CE




Order Code	Input	Power	Output	Class	Dimmable		Notes
89150V	230V	150W	24V DC	⧈	NO	25	-



7305G/RGB | 2W | LED | MR16 | GU10 | RGB


Auto rotating colours.



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7305G/RGB	GU10	RGB	-	2W	-	230V	NO	100



7306G/C | 7W | COB LED | MR16 | GU10






Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306G/C	GU10	Cool white	4000K	7W	600lm	36°	230V	NO	100



7301GD | 5,5W | SMD 2835 | MR16 | GU10 | Dimmable






Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7301GD/W	GU10	Warm white	3000K	5,5W	350lm	60°	230V	YES	100



7306GC | 7W | COB LED | MR16 | GU10

Full spectrum CRI97.






Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306GC/W	GU10	Warm white	3000K	7W	500lm	36°	230V	NO	100



7306GCD | 7,5W | COB LED | MR16 | GU10 | Dimmable

Full spectrum CRI97.

LED 97 CRI | TRIAC DIMMABLE | CE | ENERG 7,50 kWh/1000h







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306GCD/EW	GU10	Extra warm white	2700K	7,5W	500lm	36°	230V	YES	100



7103ALGT | 3W | SMD LED | G9 | 3-Step dimming

LED 80 CRI | 3-STEP DIMMABLE | CE | ENERG 3,00 kWh/1000h






Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7103ALGT/W	G9	Warm white	3000K	3W	250lm	230V	YES	100



9F07LD | 7W | SMD LED | GX53 | Dimmable

LED 80 CRI | TRIAC DIMMABLE | CE | ENERG 7,00 kWh/1000h





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9F07LD/C	GX53	Cool white	4000K	7W	480lm	230V	YES	100
9F07LD/W	GX53	Warm white	3000K	7W	480lm	230V	YES	100

01 | Recessed Spots Fixed

pages 03-22

03

10102


10102GL

04

10103X


10105X


10105XS


10103


10105


10105GU

05

10105U


50105U

06

10105A1

07

10105TG


50105TG


10105T


50105T

08

10105D1


10105D2


10105DG

09

10105D4


10105D5

10

10110T


10105D3


10105D7


50105D7

11

50105D


50205D

12

10105L


10105F

13

10105AL


10105ALG


50105ALG

14

10105R1


10105R2

15

10105CJ


10105Q

16

10105R


50105R


10105V

17

10105GL


10105GL1

18

10105GL2


50105GL


50105GL1

19

10105AC


10105AR


50105AR

20

10105GL/BL


50105GL4

21

10105GT1


10105GT2

22

50105GT1


50105GT2

02 | Recessed Spots Fixed LED

pages 25-42

25

10101C


50101

26

10103B


10103R


10103D

27

10103L


50103L


50401L


50601L

28

10103N

29

10106D


10107D


10113M

30

10112TP


10112E


10112L


10112LR Reflectors

31

10107DC


10107DA


10112C

32

10112H


10106DF


10106PF


050042 Rings


050042A Rings

33

10103P


10105W


10107W

34

10112P


10113P

35

10101L


10107DL


10107WD


10107DB

36

10102H



10107H

37

10106P

38

10103NP

39

10101TR


10103TR

40

10107BT

50103GT4
41

10107C

10107R

10103GL

10103A
42

10101G

10103G

10106G

03 | Recessed Spots Adjustable

pages 45-72

45

11103A

11105
46

11105GU
47

11103C

11105C

11105CF
48

11105CGU

51105CGU
49

10105B

11105CD

51105CD
50

11105GU3
51

51105GU

51105GA
52

51103

51105
53

11105AB

51105AB
54

11105ABG

51105ABG

51205ABG
55

11103AB

11105AC

11105AL
56

51103AB

51105AL
57

11105U

11105UA

11105UB
58

51105U

51105UA
59

11105D4

11105DT

11105TG

11105CDG

11105E
60

51105TG

51105CDG

51105DG

51105D

11105S
61

11105A1
62

11105B1

11105D7
63

11105D5

11105D6

11105D8

51105D5
64

51105B1


51105D7

51105B
65

51205B

51305B
66

11105N

51105N

51205N
67


51105R
68


51105T
69

51105F
70

11105GT5

11105GT4

51105GT4
71

11105DTR

11105TR

51105TR
72

51010TR

51020TR

04 | Recessed Spots Adjustable LED

pages 75-104

75

11103B
76

11102

11101D
77

11101W

11101B
78

11103LC

51103LC
79

51101AL

51101W

51101B

80

51201AL

51301AL

51401AL

81

11103L

11103LW

11103LB

11303L

82

51103L

51103LW

51103LB

83

11103N

84

11107B

11107

51107

85

11112

86

51112

87

11106A

11110A

88

51106A

51110A

89

11107A

11112A

11112C

11113L

90

11106K

11106KD

11109KD

91

11112H

050086 Rings

050086A Ring


51112H

050088 Rings

050088A Ring

92

11107DL

11112E

51112E

51212E

93

11103D

11112D

94

11112TA


51112TA

95

11103BD

11107DA

11107FD

96

11103P

11107WD

11207WD

97

11107P

11107D

98

11107H

99

11110C

51110C

100

11108M

11113M

101

11107F

11109E

11107M

11207M

102

11107C

11106B

103

11109LA

11106PF

050044 Rings

104

11107BT

11112T

05 | Downlights Fixed

pages 107-118

107

10007

10004

109

10115BF

10220BF

50115BF

50220BF

110

10215D

10220D

10220E

10220CF

111

10220T

50220T

112

10220GT1

50220GT1

113

50126AF

114

50142AF

50242AF

50342AF

115

10070

10150

116

10070B

10150B

50070B

50150B

50150

117

10070W

10107V

118

10020E

10035E

10070E


10150E

06 | Downlights Fixed LED

pages 121-156

121

10108F

10112F

10120F

122

10103FA

10108FA

10112FA

123



10118FA

10130FA


10140F



124

10148PE


125

50108F

50116F

126

50122F

50130F

127

50108FA

50116FA


128

50122FA

50130FA


50148PE

129


50140E

130

50140AE

50148E

50143F

50148AE

131

50148U

50148AU

132

50140W

50140AW

133

50148RE

50160E

134

10108FD

10116FD

10122FD

135

10103T

10107T

10115T

136

10124T

10130T

137

10107

10115

138

10124

10110C

10120C

10130C

10130CR

139

10107CA

10110CA

10115CA

140

10120CA

10130CA

141

10160CA

10107CD

10115CD

142

10130CD

10140CD

143

10105K

10110K

144

10120K

10130K

10130KA

145

50105K

50110K

50120K

50130K

146

10120

10142

10100 Rings

147

10112/G/D

10128/G/D

148

10112/G/W

149

10128/G/W

10112D

10118D

150

10107KD

10112KD

151

10105E

10115E

152

10130A

10113A


10150T

153

10109FD

10120FD

154

10107B

10113B

10125B

155

10110G

10115G

156

10120G

10130G

10150G

07 | Downlights Adjustable
pages 159-176

159

11110D

11070RD

11070D
160

11110N

51110N

51210N

51310N
161

11120U

0702/15

11170U
162

11150U

0706/14

11110U
163


11070AB

11070EA

51070

51150
165

51110

51210
166

51250K
167

51450K

51100R

51200R

51300R

51400R

51401R

11100R

51200AR

51300AR

51400AR
168

11110R

11070R

11106R
169

51100TR

51200TR
170

11110TR

11150TR

11070TR
171

11110AB
172

51110AB

51210AB

51310AB
173

11110GT1

11110GT4
174

51110GT1
175

11070S

11150L
176

11110H

11070E

11150E

0712/20 / 0714/20

08 | Downlights Adjustable LED
pages 179-200

179

11130BT
180

11106LB

11109L


11112L

11118L
181

11113V

11126V
182

11118A
183

11138

51125

51138

51225
184

51120

51220
185

11150A

51125A

11125B
186

11115B

11120B

11140B

11150B

51109B
187

51120B

51140B
188

51209B

51220B

51240B
189

11112TR

11118TR
190

11115TR

11120TR

11140TR
191

51115TR

51120TR

51140TR
192

51215TR

51220TR
193

11115C

11120C

11130C

194

51145

195

11107E


11115E

196

11107R


11114R


11125R

197

11118H


11115F


11125F

198

11110F


11112F


11120F


11130F

199

11135L


11130B


11140L

200

11107RA


11110B


11115RA


11125RA

09 | LED Strips & Profiles

pages 203-236

203

7840


7842

204

7823

205

7821


7831


Accessories for 7821 & 7831

206

7821W


7831W


7826 & 7827

207

7820


Accessories for 7820

208

7820W


7820AW


Accessories for 7820W & 7820AW

209

7830


7830/RGB


Accessories for 7830 & 7830/RGB


7830/RGBW

210

7830W


7830W/RGB


7827

211

7835


7835C


Accessories for 7835 & 7835C


7825

212

7835W

213

7845


7870


7875

214

7880


7885

215

7830/DW


20032

216

7820A/RGB


7830A/RGBW


7820C/A

217

7901


7836


7902


7904


7918

218

7912


7910



7910A


7912A

219

7908A


7908B


7836T


7908

220

7906


7906A



7906B


7906C


7906D

221


7916

222

7902R


7904R


7906R


7912R


7910R


7910AR

223

7901TR


7904TR


7914R

224

38104B


38108B


38114B

225

38104L


38115L

226

38207L


38215L


38230L

227

38103


38105


38110


12122

228

38102A


38102B


38102C


38101A


38101B


38101C


38101D


229

38008

230

38001A


38002A


38005A


38006 / 38007

231

7850


Accessories for 7850

232

7860


Accessories for 7860

233

7800/C



7800/RGB

234

7804


7808


Accessories for 7800

235

7810/D


7810/W


7810/BL


7810/R


7810/P


7810/V


7810/RBL



7810/RGB

236

7814


7818 / 7819


Accessories for 7810


7815


7815B

10 | Track Spots

pages 239-262

239

65608T


65610B

240

65610AT


65620AT

241

65611T


65612T

242

65614T


65616T

243

65632AT


65632BT


65632T


65632CT

244

65640T


65640AT


65640BT

245

65620TA


65620T


65620T2

246

65628T


65630T


65626T

247

65618T


65619T


65624T


65638T

248

65226T


65622T

249

65042T


65510T

250

65009T


65010T


65010B

251

65112T


65114T


65116T

252

65736T


65719T

253


65835T


65834T

254

65935T



65934T

255

65012T


65019T


65011T


65016T

256

65008T


65013T

257

65532T


65534T


65514T

258

65235T


65234T

259

65520T

260

65519T


65518T

261

65111AT


65118AT

262

65022T

11 | Tracks

pages 265-270

265

40003A

40003R

41002A

41030
266

65100/BASE

41020

41004A

41010A

41008A
267

41012A

41016A

41024A

41022A

41026R
268

41004B

41008B

41012B

41016B
269

40003

41002

41004

41010

41008
270

41012

41016

41018

41022

41020

12 | Office & Kitchen

pages 273-280

273

38135A
274

38108F

38113F
276

38128H
277

36255B


36455B
278

38236D

38258D

38236DL

38236DF

38258DF
279

38154A

38154M
280


38120L

38135L

38248L

13 | Wall & Ceiling

pages 283-310

283

62110B




62210B
284

62110

62110A

62210A

62310A
285

38108J
286

60038

60040

60042

60054
287

12105E

12105D
288

12140

12140G

12142

12138G
289

12105B

12205B
290

12105AB

12105AC
291

12132

12126

12124

12134

12120
292


67300

67164

67162
293

60056

6017


6017A

6030
294

6017G

6012

6022

6005
295


67228

67226
296

67302



14 | Wall & Ceiling LED

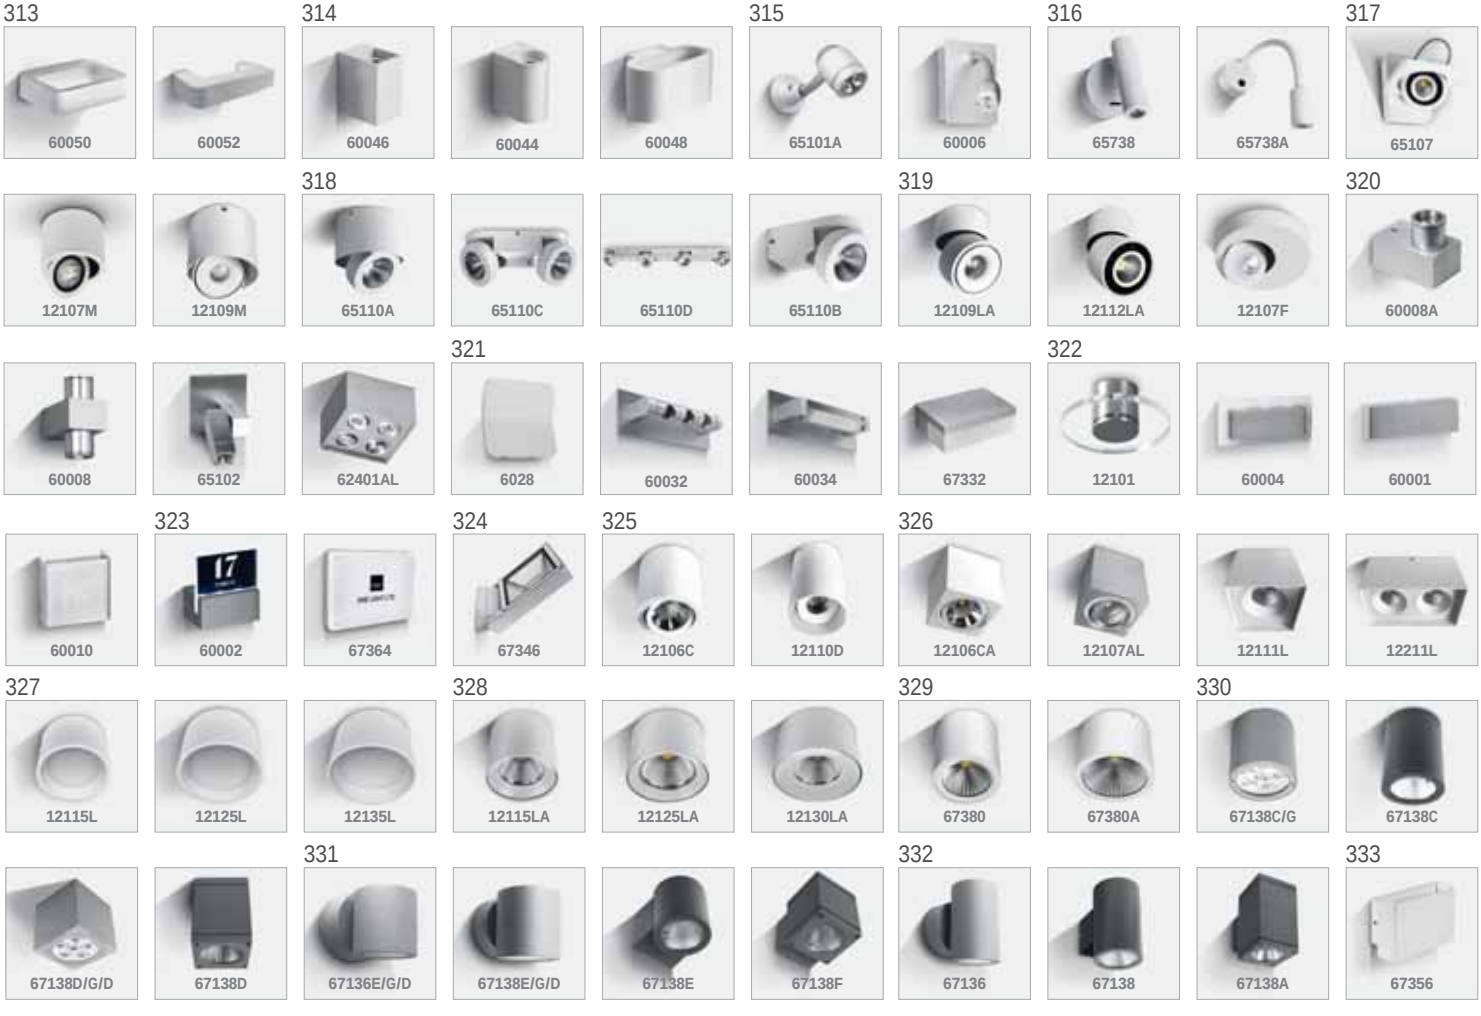pages 313-354




67342


67374


67374A

334

67362B


67362C


67392

335

67378


67378A

336

67376


67376A


6026A

337

67298


67274


67274A

338

67274B


67274C

339


67340


67340A

340

67398


67398A


67398C

341

67124


67304

342

67386A


67386C


67396


67396A

343

67394B


67394A


67394


67388A

344

67388B


67388C

345

67359


67360

346

67359A


67360A


67359B

347

67170


67172


67354

348

67308


67146

349

67174


67176

350

67122


67126

351

67128


67116

352

67118


60014C

353

60016B


60012A


60012B

354

67220A


67334


67336

15 | Plafo

pages 357-386

357

12220


12226S


12150S

358

62102


62104

359

62010


62010A

360

62012


62014

361

62024A


62024B


62024C

362

62022A


62022B


62022C

363

67284


67284L


67284L/G


67284LA

364

62018


62018A

365

62115F


62130F

366

62122F


62130AF

367

62140AE


62140RE

368

62140F


62140AF


62140RF

369

62018F


62018AF

370

62030F


62038F


62046F

371

67280


67280A


67282


67282A

372

67280AL


67390
373

6728ON

6728OAN

6728OBN

6728OANE
374

67282N

67282AN

67282BN

67282ANE
375

67362

67363

67362A

67363A
376

67384

67384A
377

67366

67366E

67368

67368M
378

67370

67372
379

62100

62200


62300
380

67316A
381

64002

64004

64006
382

64008

64010

62132N
383

62142N

62135NA
384

62118D

62125D

62150D
385

67404

62025
386

67402

62142NB

16 | Bathroom & Mirror

pages 389-396


38115C
389

38120C

38114DE
390

38114EE

38114GE

38114CE
391

38114D

38114E

38114G

38114C

38121D
392

38121E

38108G
393

38124

60204
394

60106

60106A

60107A
395

60107B


60107C
396

60107D

17 | Pendants

pages 399-408


63036
399

63038

63001
400

63003

63002

63005
401

63018A

0990
402

0992

38140
403

38018
404

38016

62150J
405

63270

63070D
406

63150C
407

63034
408

63025L

63030L

18 | Decorative

pages 411-426

411

10101C4

10101C5
412

10105C4
413

61046

65140

65138
414

61044

61044A
415

61042A

61042B
416

61024

61026
417

61016

61016A
418

9C002
419

61058A
420

61036

61038

61038B
421

61070

61068

61068B
422

61066

61066T
423

65105A

65305B
424

61040
425

0994
426

63028

63028A

63028B

19 | Wall Recessed & Inground

pages 429-450

429

50104G

50113
430

68054

68056
431

68006

68007

68038
432

68005

68005/BOX

68008

68008/BOX
433

68052

68052/G/W

68052A
434


68046

68048

68050
435

68004

68004A
436

68030

68032
437

68001

68002

68003
438

68058

68058A

68060
439

68068

68068A

68068C

68062
440

68064

68066
441

68022

68024

68012

68016
442

68044
443

69028

69012

69038
444

69040

69026
445

69042

69042A

69042B

69044
446

69016

69016A

69016B

69022
447

69024
448

69003

69002

69002/RGB
449

69006

69008
450

69006G

69008G

20 | Garden & Underwater
pages 453-480

453

67198G


67198AG

67128
454

7008L

7008A

7010

7010A
455

7046

7047
456

7046/AN/W

7047/AN/W
457

7052

7052A
458

67196BG

67196A

67196B

67196C
459

67060
460

67090

67092
461

67094

67098
462

67100

67102
463

67180

67182
464


67270

67272
465


67236

67236A

67238

67238A

67042
466

67234

67234A
467

67256
468

67036

67034

67410

67410A
469

67246/AL/...

67250A
470

67244

67246/G/...

67248

67250
471

67344
472

67358
473

67002

67004

67056
474

67012

67014
475

67010W

67286

67290
476

67408
477

67406

67406A

67406B

67406C
478

67406D

67406E
480

69032

69036

69034

21 | Industrial & Floodlights
pages 483-510

483

38118E

38136E

38158E

38218E

38236E

38258E
484

38118L

38136L

38158L

38236L

38258L
485

38136P

38158P

38218P


38236P

38258P
486

38118LA

38136LA

38145LA
487

38136R

38236R
488

38120E

38140E

38165E

38220E

38240E

38265E
489

7056

7056A

7056B

490

63100A

63200A
491

63100U

63200U
492

63100E

63150E

63200E
493

7020
494

7030

7022
495

7036

7028A/AN/RGB

7028B/AN/RGB

7028AR

7028BR
496

7028A

7028B

7032

7033
497

7048
498

7060

7028AE

7028BE

7038

7040

7038E

7040E
499

7034B

7034C

7034D
500

7028A

7028AB

7028B

7028C

7028E
501

7062A
502

7064

7066
503

7028AG

7028BG
504

7028CG

7028BGE

7050A

7050B

7050C
505

7058

7058R
506

7054A

7054B
507

70080
508

70090

70100

70101

70102
509

70108

70104

70105
510

70110

22 | Emergency Lights


pages 513-518

513

89002

67366E

67284LE

67280ANE

67282ANE
514

89400

89406

89406R
515

89404

89402
516

89005/EME
517

89009/EME
518

89143F

23 | Trafo & Ballast

pages 521-524

521

89106E

89110E
522

89020A

89020B

89020

89070

89150
523

89113 / 89142

89213

89242

524


89142 / 89242


89103

24 | LED Drivers
pages 527-538

527


89004


89006


89008


89015


89020

528


89011D


89012D


89015T


89076D

529


89004C


89030C


89004A


89006A


89015A


89030A

530


89015AT

531


89008W


89015W


89030W


89075W


89200WN

532


89015V


89030V


89050V


89075V


89100V


89150V

533


89030VL


89060VL


89075VL


89100VL


89150VL

534


89060VN


89100VN


89150VN


89200VN


89350VN

535


89030WD


89060WD


89030VD


89075VD


89100VNT

536


89027D


89030D


89050D

537


89020L


89045L


89050L

538


89060WP


89100VP


89150VP


89200VP

25 | LED Control & Dimming
pages 541-546

541


22000

542


89010D


89100


89300

543


89036A

544


89024D


89024E

545


20020


20022


89302


89302A

546


20030


20032


20034

26 | Lamps

pages 549-602

549

7102G / 7104G

7102GFSR

7106GPH

9407G

9S07G
550

7103LG

7103BLG

7105BLG
551

7102ALG

7102LG
552

7103ALG

7106ALG

7109ALG

7103ALGD

7103ALGT
553

7106ALGD

7103ALG/DW

7103A

7103 / 7105 / 7107

7103SR / 7105SR
554

7101AL

7101L

7235

7201G
555

7320/38SR / 7350/38SR

7350
556

7301

7303

7305

7304A
557

7306K

7301G/W

7301G

7303G

7304G
558

7305G

7304WG

7304AG

7305AG

7306G
559

7308G

7305BG

7306LG

7307BG

7307CG
560

7304WGD

7306LGD

7306GD

7308GD
561

7305CG/C/120
562

7305CG/W

7306CG

7306CG/BL

7306KGD

7306CGD
563

7307DGD

7305M

7312M

7309AM
564

7335G/40
565

7350G/38SR

7350G/40

7350G

7450B
566

7306E

7310H

7306HD

7306B

7306A
567

9R23
568

9R16

9R27

7375R

7511R

7520R
569

7312AG

7315G

7315CG

7309AG
570

7513AGD
571

7315GD

7312AGD

7309AGD

7513A

7515A
572

7512A

7517A

7510R

7512C
573

7510AR
574

10106NA

7521R

7512D

7524D

7524BD
575

7605L

7610L

7612L

7615L
576

7604
577

7607A

7610A

7606 / 7610 / 7615

7610A / 7615A
7630A / 7650A

7613C
578

9F07

9F13

9F01

9F07L

9F07LD

579

9C04A

9C06B

9C05N
580

9C05BD

9C06BD

9C05ND
581

9G07B

9G12B
582

9G12BD

9G12D
583

9G10L

9G10M

9G10V
584

9G09/RGBW

9G15L

9G20L
585

9G20LD

9G09P

9G20P

9G30P
586

9G20N

9G30N

9G50N

9G80N
587

9C05RD

9G03RAD

9T05RD

9G04RAD

9G06RD
588

9C02R

9G03R

9G04RA

9G04R

9G06R

9G06RD
589

9G01/W

9G06M

9G01/../E

9G01/../B
590

9S13/GR/E

9S23/BL/E

9S23/Y/E
591

9432

9465
592

9R07

9R08
593

8107

8213

8213/../4SR

8218

8218/../4SR

8226/W/4SR
594

9D03

8318

8332

8342

8218A
595

9012

9955A

9922L

9932L

9940L
596

9816

9821

9828

9838
597

9011L

9021L

9026L
598

9009L

9012L

9018L

9022L

9032L
599

8003M

8007M
600

8007

8007G
601

8007/W

8015
602

8010L

8002GA

8003GC

8015G


8015GC

27 | Accessories

pages 605-610

605

89003/EXT

89003A/EXT

89006/EXT

89006A/EXT
606

0800B

0800A

0800

60000

7010P
607

0950GA

608 609 610


0950G


0962G / 0960G


70028


70026


70020


70030


70038


70036


70034


70032

28 | Advertising & Marketing

pages 613-614

613 614


060020 / 060020A


060016


060018


060008


060010


060012


060014


060026 / 060027


060028
060029 / 060030





01

Recessed Spots Fixed

Pages 03-22

MR11 | MR16 | G4 | GU4 | GU5,3 | GU10

Die cast | Glass | Aluminium | Metal | Gypsum | Semi trimless

IP20 IP43 IP44 IP65

DARK LIGHT





Star Lights G4



10102 | 20W | G4 | Die cast

IP20

CE



Suitable for G4 LED lamps.






10102GL/BL | 20W | G4 | Glass

IP20

CE



Suitable for G4 LED lamps.






10102GL/Y | 20W | G4 | Glass

IP20

CE



Suitable for G4 LED lamps.



Order Code	Colour	Watts	Input	Class					Notes
10102/W	White	20W	12V	III	40cm	24mm	30mm	100	-
10102/MC	Brushed chrome	20W	12V	III	40cm	24mm	30mm	100	-
10102/BS	Brass	20W	12V	III	40cm	24mm	30mm	100	-
10102GL/BL	Blue	20W	12V	III	40cm	33mm	50mm	100	-
10102GL/Y	Yellow	20W	12V	III	40cm	33mm	50mm	100	-




10103X | 35W | MR11 | GU4 | Die cast

IP20

CE



Suitable for LED lamps.





10105X | 50W | MR16 | GU5,3 | Die cast


IP20

CE



Suitable for LED lamps.







10105XS | 50W | MR16 | GU5,3 | Pressed metal


IP20

CE



Suitable for LED lamps.







10103 | 35W | MR11 | GU4 | Die cast


IP20

CE



Suitable for LED lamps.







10105 | 50W | MR16 | GU5,3 | Die cast

IP20


CE




Suitable for LED lamps.

10105GU | 50W | MR16 | GU10 | Die cast





Order Code	Watts	Input	Class					Notes
10103X	35W	12V		40cm	45mm	35mm	100	-
Available colours: **10103X/C** Chrome								
10105X	50W	12V		40cm	63mm	60mm	100	-
Available colours: **10105X/W** White **10105X/MC** Brushed chrome **10105X/C** Chrome **10105X/BS** Brass **10105X/BBS** Brushed brass								
10105XS	50W	12V		40cm	63mm	60mm	100	-
Available colours: **10105XS/W** White **10105XS/MC** Brushed chrome **10105XS/C** Chrome								
10103	35W	12V		40cm	51mm	45mm	100	-
Available colours: **10103/BS** Brass **10103/BBS** Brushed brass **10103/ABS** Antique brass								
10105	50W	12V		40cm	70mm	60mm	100	-
Available colours: **10105/W** White **10105/MC** Brushed chrome **10105/C** Chrome **10105/ABS** Antique brass								
10105GU	50W	100-240V		15cm	70mm	150mm	100	-
Available colours: **10105GU/W** White **10105GU/G** Grey **10105GU/MC** Brushed chrome **10105GU/C** Chrome								

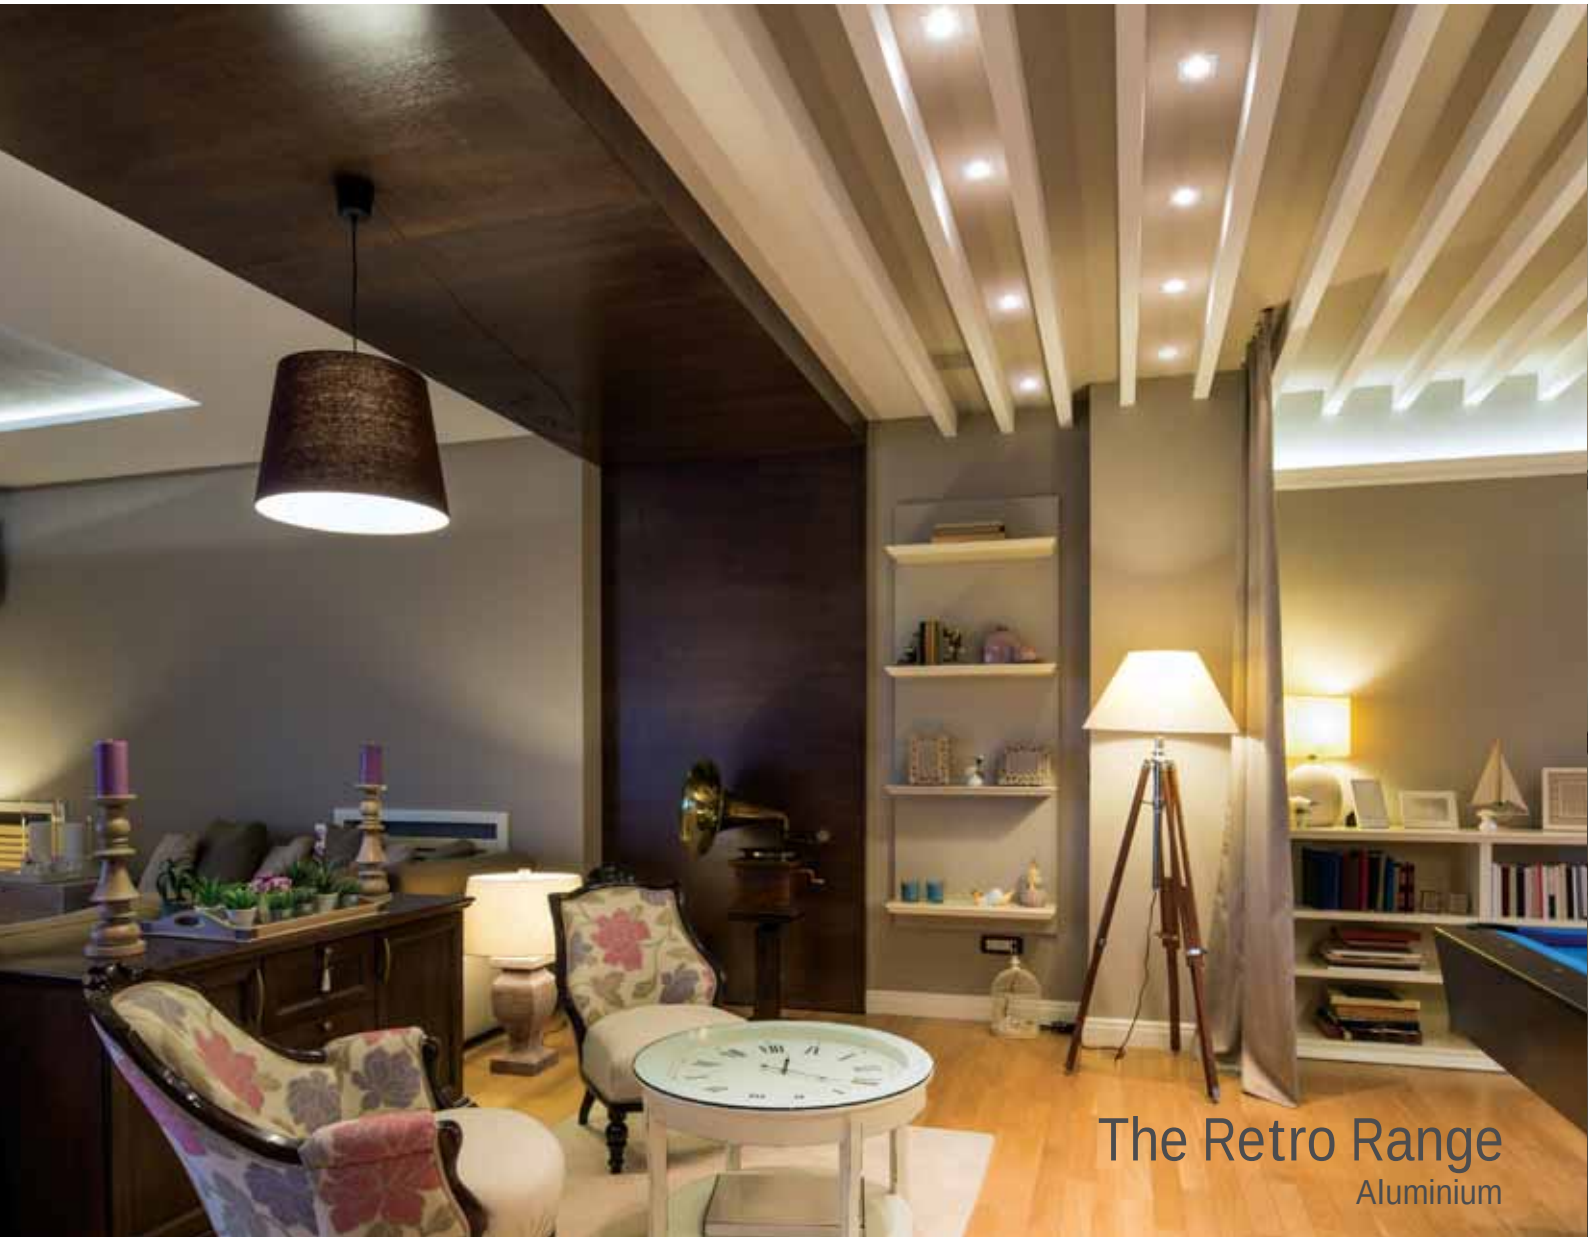



10105U | 50W | MR16 | GU10 | Aluminium

IP20

CE









50105U | 50W | MR16 | GU10 | Aluminium

IP20


CE







Order Code	Colour	Watts	Input	Class					Notes
10105U/W	White	50W	100-240V	⏚	15mm	72mm	120mm	50	-
50105U/W	White	50W	100-240V	⏚	15mm	72mm	120mm	50	-

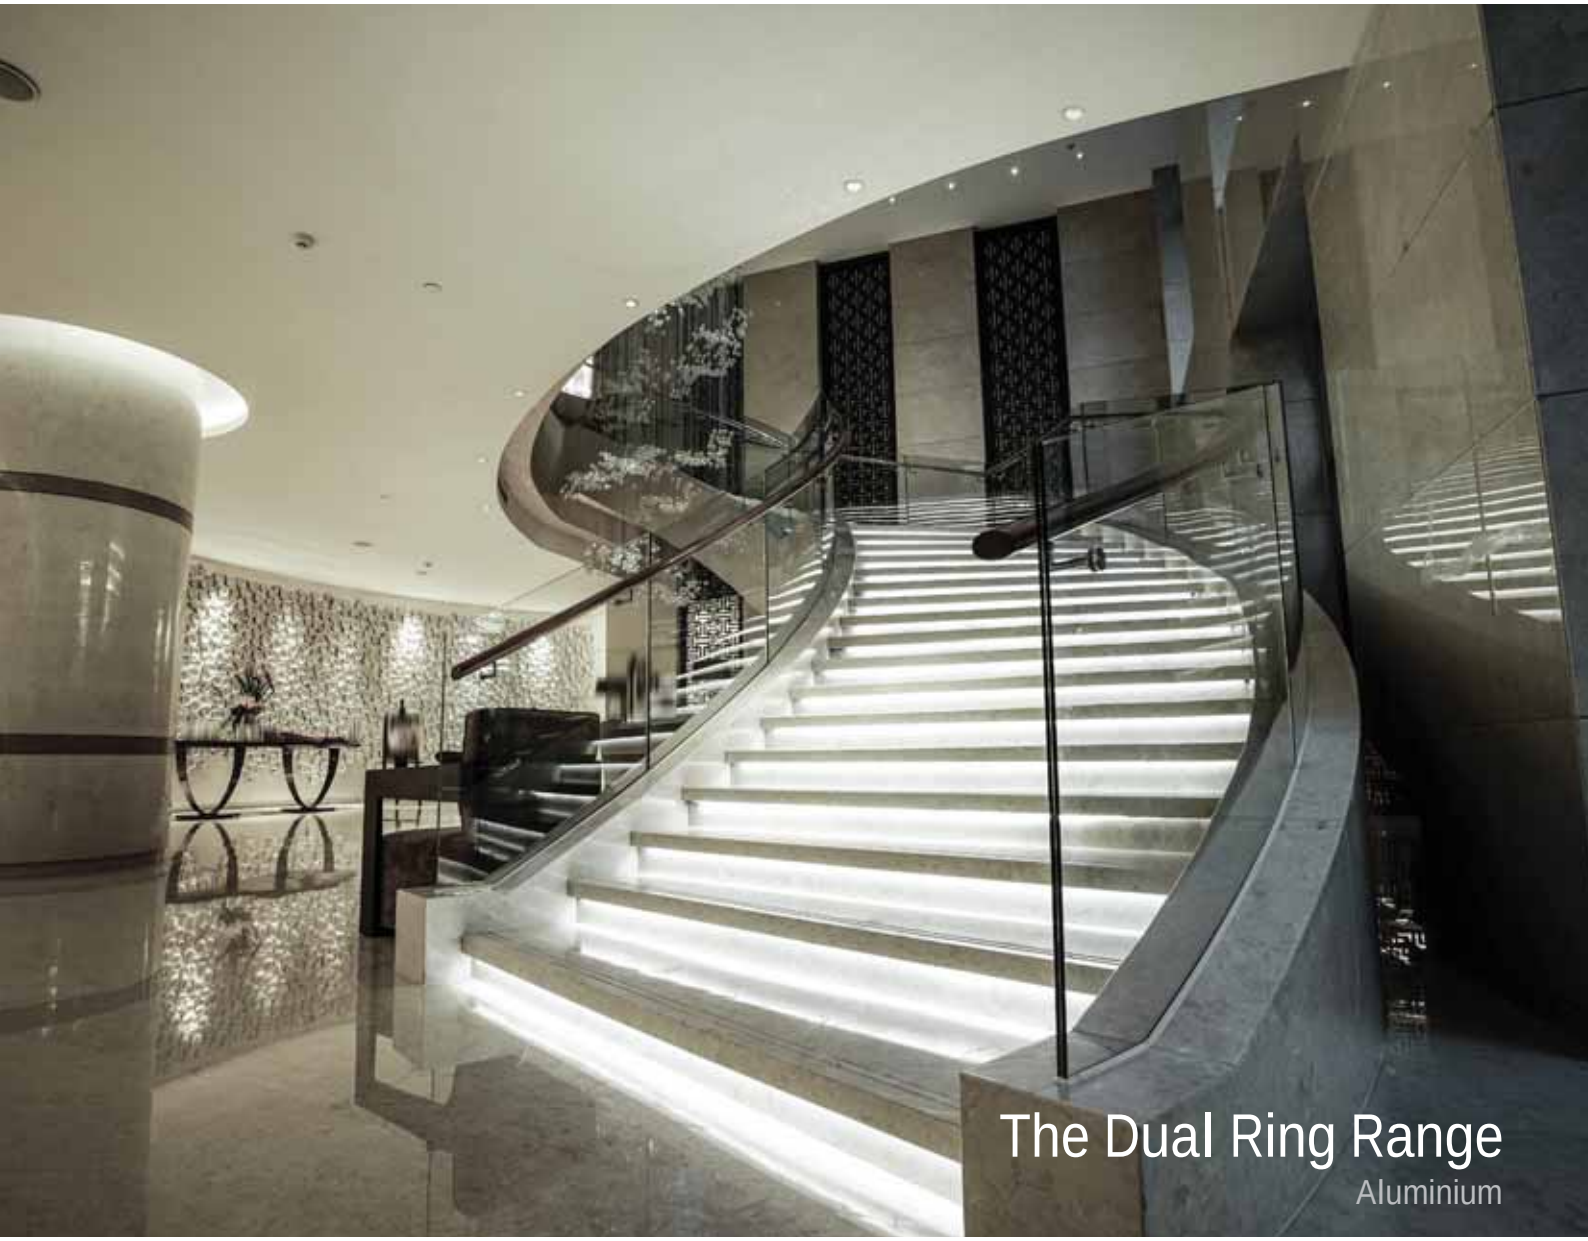

The Dual Ring Range

Aluminium



10105A1/AL | 50W | MR16 | GU10 | Aluminium

IP20

CE








10105A1/W | 50W | MR16 | GU10 | Aluminium

IP20

CE





Order Code	Colour	Watts	Input	Class					Notes
10105A1/AL	Aluminium	50W	100-240V	⏚	15mm	68mm	120mm	100	-
10105A1/W	White	50W	100-240V	⏚	15mm	68mm	120mm	100	-



The Semi Trimless Dark Light Range


10105TG/W

10105TG | 50W | MR16 | GU10 | Semi trimless | Aluminium

IP20 DARK LIGHT

CE


10105TG/B





50105TG | 50W | MR16 | GU10 | Semi trimless | Die cast

IP20 DARK LIGHT

CE


Suitable for LED lamps.





10105T | 50W | MR16 | GU5,3 | Semi trimless | Aluminium

IP20 DARK LIGHT

CE


Suitable for LED lamps.





50105T | 50W | MR16 | GU5,3 | Semi trimless | Die cast

IP20 DARK LIGHT

CE


Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class					Notes
10105TG/W	White	50W	100-240V		15cm	75mm	170mm	50	-
10105TG/B	Black	50W	100-240V		15cm	75mm	170mm	50	-
50105TG/W	White	50W	100-240V		15cm	76x76mm	120mm	50	-
10105T/BE	Beige	50W	12V		40cm	75mm	130mm	100	-
50105T/BE	Beige	50W	12V		40cm	75x75mm	130mm	100	-



The Semi Dark Light Range


Aluminium



10105D1 | 50W | MR16 | GU10 | Aluminium

IP20








10105D2 | 50W | MR16 | GU10 | Aluminium

IP20








10105DG | 50W | MR16 | GU10 | Semi trimless | Aluminium

IP20 DARK LIGHT



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class					Notes
10105D1/W	White	50W	100-240V		15cm	62mm	120mm	50	-
10105D1/B	Black	50W	100-240V		15cm	62mm	120mm	50	-
10105D2/W	White	50W	100-240V		15cm	62mm	120mm	50	-
10105D2/B	Black	50W	100-240V		15cm	62mm	120mm	50	-
10105DG/W	White	50W	100-240V		15cm	76mm	155mm	50	-



The Dark Light Range



10105D4/W

10105D4 | 50W | MR16 | GU10 | Aluminium

IP20
DARK LIGHT CE


10105D4/B







10105D5 | 50W | MR16 | GU10 | Aluminium

IP20
DARK LIGHT CE







10110T | 75W | R111 | G53 | Semi trimless | Pressed metal

IP20
DARK LIGHT CE


Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class					Notes
10105D4/W	White	50W	100-240V		15cm	68mm	140mm	50	-
10105D4/B	Black	50W	100-240V		15cm	68mm	140mm	50	-
10105D5/W	White	50W	100-240V		15cm	68mm	130mm	50	-
10110T/W	White	75W	12V		40cm	175mm	210mm	8	-



The Dark Light Dual Ring Range

Aluminium




10105D3 | 50W | MR16 | GU10 | Aluminium

IP20 DARK LIGHT

CE








10105D7 | 50W | MR16 | GU10 | Aluminium

IP20 DARK LIGHT

CE








50105D7 | 50W | MR16 | GU10 | Aluminium

IP20 DARK LIGHT

CE





Order Code	Colour	Watts	Input	Class					Notes
10105D3/W	White	50W	100-240V		15cm	68mm	120mm	100	-
10105D7/W	White	50W	100-240V		15cm	80mm	120mm	50	-
50105D7/W	White	50W	100-240V		15cm	80mm	120mm	50	-

The Dark Light Range Pro

Aluminium



50205D/AL



50105D/W



50105D | 50W | MR16 | GU5,3 | Aluminium

IP20 DARK LIGHT

CE








50205D | 2x50W | MR16 | GU5,3 | Aluminium

IP20 DARK LIGHT

CE





Order Code	Colour	Watts	Input	Class					Notes
50105D/W	White	50W	12V		40cm	105mm	130mm	20	-
50205D/AL	Aluminium	2x50W	12V		40cm	220x110mm	130mm	20	-
50205D/W	White	2x50W	12V		40cm	220x110mm	130mm	20	-



10105L/MC

10105F/W

The Dark Light Range 12V

Steel



10105L | 50W | MR16 | GU5,3 | Adjustable ring | Steel

IP20 DARK LIGHT

ADJUSTABLE



Suitable for LED lamps.





10105F | 50W | MR16 | GU5,3 | Adjustable ring | Steel

IP20 DARK LIGHT

ADJUSTABLE





Order Code	Colour	Watts	Input	Class					Notes
10105L/MC	Brushed chrome	50W	12V	III	40cm	90mm	95mm	50	-
10105L/C	Chrome	50W	12V	III	40cm	90mm	95mm	50	-
10105F/W	White	50W	12V	III	40cm	90mm	90mm	50	-
10105F/MC	Brushed chrome	50W	12V	III	40cm	90mm	90mm	50	-



The Dark Light Range

Aluminium




10105AL | 50W | MR16 | GU5,3 | Aluminium

IP20 DARK LIGHT

CE



Suitable for LED lamps.






10105ALG | 50W | MR16 | GU10 | Aluminium

IP20 DARK LIGHT

CE



Suitable for LED lamps.





50105ALG | 50W | MR16 | GU10 | Aluminium

IP20 DARK LIGHT

CE



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class					Notes
10105AL/W	White	50W	12V	III	40cm	78mm	75mm	50	-
10105AL/B	Black	50W	12V	III	40cm	78mm	75mm	50	-
10105ALG/AL	Aluminium	50W	100-240V		15cm	78mm	150mm	50	-
10105ALG/W	White	50W	100-240V		15cm	78mm	150mm	50	-
50105ALG/AL	Aluminium	50W	100-240V		15cm	78mm	150mm	50	-
50105ALG/W	White	50W	100-240V		15cm	78mm	150mm	50	-



The Bathroom Range IP65
Aluminium




10105R1/AL | 50W | MR16 | GU10 | Aluminium

IP65

CE










10105R1/W | 50W | MR16 | GU10 | Aluminium

IP65

CE










10105R2 | 50W | MR16 | GU10 | Aluminium

IP65 DARK LIGHT

CE







Order Code	Colour	Watts	Input	Class					Notes
10105R1/AL	Aluminium	50W	100-240V		15cm	68mm	120mm	100	-
10105R1/W	White	50W	100-240V		15cm	68mm	120mm	100	-
10105R2/W	White	50W	100-240V		15cm	82mm	130mm	50	-



The Bathroom Range

Die cast



10105CJ/G/5 | 50W | MR16 | GU5,3 | Die cast

IP43 DARK LIGHT

CE







10105CJ/MC/5 | 50W | MR16 | GU5,3 | Die cast

IP43 DARK LIGHT

CE







10105CJ/BS/5 | 50W | MR16 | GU5,3 | Die cast

IP43 DARK LIGHT

CE







10105CJ/ABS/5 | 50W | MR16 | GU5,3 | Die cast

IP43 DARK LIGHT

CE







10105Q | 50W | MR16 | GU5,3 | Die cast

IP44

CE





Order Code	Colour	Watts	Input	Class					Notes
10105CJ/G/5	Grey	50W	12V	III	40cm	102mm	120mm	50	-
10105CJ/MC/5	Brushed chrome	50W	12V	III	40cm	102mm	120mm	50	-
10105CJ/BS/5	Brass	50W	12V	III	40cm	102mm	120mm	50	-
10105CJ/ABS/5	Antique brass	50W	12V	III	40cm	102mm	120mm	50	-
10105Q/MC	Brushed chrome	50W	12V	III	40cm	70mm	110mm	50	-



The Bathroom Range

Die cast



10105R | 50W | MR16 | GU5,3 | Die cast

IP44

CE







50105R | 50W | MR16 | GU5,3 | Die cast

IP44

CE








10105V | 50W | MR16 | GU10 | Die cast

IP65

CE





Order Code	Colour	Watts	Input	Class					Notes
10105R/W	White	50W	12V		40cm	70mm	100mm	50	-
10105R/B	Black	50W	12V		40cm	70mm	100mm	50	-
10105R/MC	Brushed chrome	50W	12V		40cm	70mm	100mm	50	-
50105R/W	White	50W	12V		40cm	70mm	100mm	50	-
50105R/MC	Brushed chrome	50W	12V		40cm	70mm	100mm	50	-
10105V/W	White	50W	100-240V		100cm	78mm	120mm	24	-
10105V/G	Grey	50W	100-240V		100cm	78mm	120mm	24	-



Round Decorative Spots

Natural aluminium + glass




10105GL | 50W | MR16 | GU5,3 | Natural aluminium + glass

IP20



Suitable for LED lamps.






10105GL1 | 50W | MR16 | GU5,3 | Natural aluminium + glass

IP20



Suitable for LED lamps.






10105GL2 | 50W | MR16 | GU5,3 | Natural aluminium + glass

IP20



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class					Notes
10105GL/AL	Aluminium	50W	12V	III	40cm	60mm	40mm	50	-
10105GL1/AL	Aluminium	50W	12V	III	40cm	60mm	50mm	50	-
10105GL2/AL	Aluminium	50W	12V	III	40cm	60mm	50mm	50	-


10105GL/AL


50105GL/AL


10105GL1/AL


50105GL1/AL

Square Decorative Spots

Natural aluminium + glass




50105GL | 50W | MR16 | GU5,3 | Natural aluminium + glass

IP20

CE


Suitable for LED lamps.

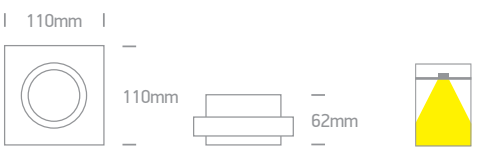



50105GL1 | 50W | MR16 | GU5,3 | Natural aluminium + glass

IP20

CE


Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class					Notes
50105GL/AL	Aluminium	50W	12V	III	40cm	60mm	50mm	50	-
50105GL1/AL	Aluminium	50W	12V	III	40cm	60mm	50mm	50	-



The Decorative Spots

Natural aluminium



10105AC | 50W | MR16 | GU5,3 | Natural aluminium

IP20

CE



Suitable for LED lamps.





10105AR | 50W | MR16 | GU5,3 | Natural aluminium

IP20

CE



Suitable for LED lamps.





50105AR | 50W | MR16 | GU5,3 | Natural aluminium

IP20

CE



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class					Notes
10105AC/AL	Aluminium	50W	12V	III	40cm	60mm	60mm	50	-
10105AR/AL	Aluminium	50W	12V	III	40cm	70mm	75mm	50	-
50105AR/AL	Aluminium	50W	12V	III	40cm	70mm	75mm	50	-



10105GL/BL



50105GL4/MC

The Decorative Spots



10105GL | 50W | MR16 | GU5,3 | Glass

IP20

CE



Suitable for LED lamps.





50105GL4 | 35W | MR16 | GU10 | Metal + glass

IP20


CE



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class					Notes
10105GL/BL	Blue	50W	12V		40cm	75mm	40mm	50	-
50105GL4/MC	Brushed chrome	35W	100-240V		15cm	88mm	130mm	50	-

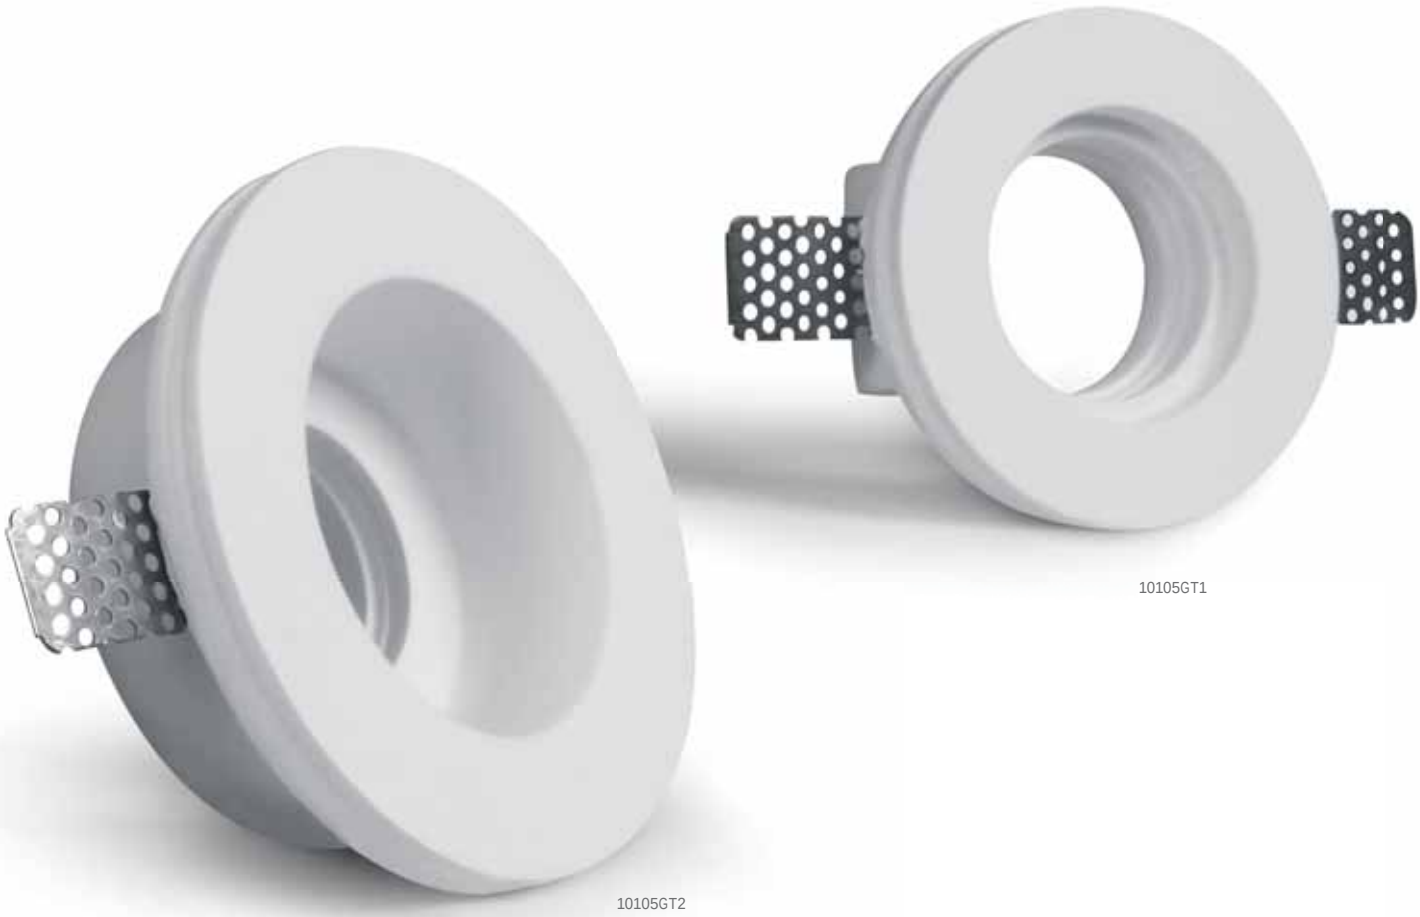


Trimless Gypsum Round



10105GT1 | 50W | MR16 | GU10 | Trimless | Gypsum

IP20








10105GT2 | 50W | MR16 | GU10 | Trimless | Gypsum

IP20 DARK LIGHT





Order Code	Colour	Watts	Input	Class					Notes
10105GT1	White	50W	100-240V		15cm	102mm	100mm	24	-
10105GT2	White	50W	100-240V		15cm	132mm	150mm	24	-



50105GT2



50105GT1


Trimless Gypsum Square



50105GT1 | 50W | MR16 | GU10 | Trimless | Gypsum

IP20








50105GT2 | 50W | MR16 | GU10 | Trimless | Gypsum

IP20 DARK LIGHT



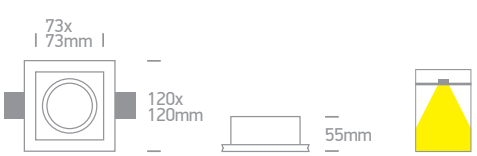

Order Code	Colour	Watts	Input	Class					Notes
50105GT1	White	50W	100-240V	□	15cm	102x102mm	100mm	24	-
50105GT2	White	50W	100-240V	□	15cm	122x122mm	150mm	24	-





02

Recessed Spots Fixed LED

Pages 25-42

COB LED | SMD LED

Die cast | Aluminium | Plastic | Gypsum | Acrylic | Trimless

IP20 IP44 IP54 IP65

DIMMABLE DARK LIGHT QUICK FIX FIRE RATED 80 CRI 85 CRI 90 CRI





10101C/C/D



50101/AL/D

LED Spots



10101C | 1W | LED | Cabinet light | Steel

IP20

CE






50101 | 9x0,2W | LED | Natural aluminium

IP20

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10101C/C/D	Chrome	Daylight	6000K	1W	50lm	90°	12V AC		30cm	50mm	25mm	100	Requires 12V AC transformer
50101/AL/D	Aluminium	Daylight	6000K	9x0,2W	60lm	90°	230V		-	60mm	40mm	50	Complete with driver
50101/AL/BL	Aluminium	Blue	-	9x0,2W	-	90°	230V		-	60mm	40mm	50	Complete with driver



The 1W/3W LED Spots

Aluminium



10103B | 1W/3W | COB LED | Aluminium — 1W@350mA / 3W@700mA

IP20 80 CRI

DIMMABLE QUICK FIX CE








10103R | 1W/3W | COB LED | Aluminium — 1W@350mA / 3W@700mA

IP20 80 CRI

DIMMABLE QUICK FIX CE







10103D | 1W/3W | COB LED | Aluminium — 1W@350mA / 3W@700mA

IP20 80 CRI

DIMMABLE QUICK FIX DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103B/AL/W	Aluminium	Warm white	3000K	1W/3W	200lm@3W	40°	350mA/700mA		40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/W/W	White	Warm white	3000K	1W/3W	200lm@3W	40°	350mA/700mA		40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103B/B/W	Black	Warm white	3000K	1W/3W	200lm@3W	40°	350mA/700mA		40cm	35mm	50mm	100	Requires 350mA/700mA driver
10103R/W/W	White	Warm white	3000K	1W/3W	200lm@3W	40°	350mA/700mA		40cm	50mm	65mm	50	Requires 350mA/700mA driver
10103D/W/C	White	Cool white	4000K	1W/3W	200lm@3W	40°	350mA/700mA		40cm	43mm	65mm	100	Requires 350mA/700mA driver
10103D/W/W	White	Warm white	3000K	1W/3W	200lm@3W	40°	350mA/700mA		40cm	43mm	65mm	100	Requires 350mA/700mA driver

one



Fixed Spots



10103L | 3x1W | LED | Natural aluminium


IP20 DIMMABLE QUICK FIX CE





50103L | 3x1W | LED | Natural aluminium

IP20 DIMMABLE QUICK FIX CE

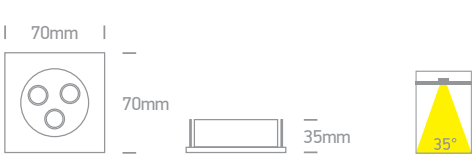



50401L | 4x1W | LED | Natural aluminium

IP20 DIMMABLE QUICK FIX CE





50601L | 6x1W | LED | Natural aluminium

IP20 DIMMABLE QUICK FIX CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103L/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	40mm	100	Requires 350mA driver
10103L/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	60mm	40mm	100	Requires 350mA driver
50103L/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	40mm	100	Requires 350mA driver
50103L/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	60mm	40mm	100	Requires 350mA driver
50401L/D/35	Aluminium	Daylight	6000K	4x1W	240lm	35°	350mA	III	40cm	80x80mm	40mm	50	Requires 350mA driver
50401L/W/35	Aluminium	Warm white	3000K	4x1W	180lm	35°	350mA	III	40cm	80x80mm	40mm	50	Requires 350mA driver
50601L/D/35	Aluminium	Daylight	6000K	6x1W	360lm	35°	350mA	III	40cm	118x80mm	40mm	50	Requires 350mA driver
50601L/W/35	Aluminium	Warm white	3000K	6x1W	270lm	35°	350mA	III	40cm	118x80mm	40mm	50	Requires 350mA driver



3W LED Glass Lens
Aluminium



10103N/AL | 3x1W | LED | Aluminium

IP20 DIMMABLE QUICK FIX CE








10103N/W | 3x1W | LED | Aluminium

IP20 DIMMABLE QUICK FIX CE








10103N/B | 3x1W | LED | Aluminium

IP20 DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103N/AL/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/AL/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/W/D/35	White	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/W/W/35	White	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/B/D/35	Black	Daylight	6000K	3X1W	180lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver
10103N/B/W/35	Black	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	60mm	45mm	100	Requires 350mA driver



The COB Semi Dark Light Range

Die cast




10106D | 6W | COB LED | Die cast

IP20 80 CRI

DIMMABLE QUICK FIX CE








10107D | 7W | COB LED | Die cast

IP20 90 CRI

DIMMABLE QUICK FIX CE








10113M | 13W | COB LED | Shelf illumination | Die cast

IP20 80 CRI

DIMMABLE QUICK FIX DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10106D/W/W	White	Warm white	3000K	6W	500lm	40°	350mA	III	40cm	80mm	90mm	20	Requires 350mA driver
10107D/W/W	White	Warm white	3000K	7W	530lm	36°	700mA	III	40cm	77mm	90mm	60	Requires 700mA driver
10113M/W/W	White	Warm white	3000K	13W	1100lm	40°	350mA	III	40cm	74mm	95mm	20	Requires 350mA driver




The 12W COB Dark Light Range



10112TP | 12W | COB LED | Die cast

IP44 80 CRI
DIMMABLE QUICK FIX DARK LIGHT CE








10112E | 12W | COB LED | Die cast

IP20 80 CRI
DIMMABLE QUICK FIX DARK LIGHT CE








10112L | 12W | COB LED | Aluminium

Reflector must be ordered separately.

IP20 80 CRI
DIMMABLE QUICK FIX DARK LIGHT CE







10112LR/W White | 10112LR/B Black | 10112LR/G Matt chrome | 10112LR/C Chrome | 10112LR/BS Brass | 10112LR/CU Copper

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
									40cm	75mm	110mm	50	
10112TP/W/C	White	Cool white	4000K	12W	1100lm	38°	700mA	III					Requires 700mA driver
10112TP/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III					Requires 700mA driver
10112TP/W/EW	White	Extra warm white	2700K	12W	1100lm	38°	700mA	III					Requires 700mA driver
10112TP/B/W	Black	Warm white	3000K	12W	1100lm	38°	700mA	III					Requires 700mA driver
10112E/W/C	White	Cool white	4000K	12W	1100lm	40°	700mA	III					Requires 700mA driver
10112E/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III					Requires 700mA driver
10112L/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III					Requires 700mA driver
10112L/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA	III					Requires 700mA driver



10107DA/W/W

10112H/W/W

10112C/W/W

The COB Dark Light Range



10107DC | 7W | COB LED | Die cast

IP20 80 CRI

DARK LIGHT CE








10107DA | 7W | COB LED | Die cast

IP20 90 CRI

DIMMABLE QUICK FIX DARK LIGHT CE







10112C | 12W | COB LED | Die cast

IP20 80 CRI

DIMMABLE QUICK FIX DARK LIGHT CE







10112H | 12W | COB LED | Aluminium


IP20 80 CRI

DIMMABLE QUICK FIX DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107DC/W/W	White	Warm white	3000K	7W	560lm	50°	230V		15cm	55mm	110mm	50	Complete with driver
10107DC/B/W	Black	Warm white	3000K	7W	560lm	50°	230V		15cm	55mm	110mm	50	Complete with driver
10107DA/W/W	White	Warm white	3000K	7W	530lm	36°	700mA		40cm	97mm	120mm	30	Requires 700mA driver
10112C/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA		40cm	75mm	135mm	50	Requires 700mA driver
10112H/W/W	White	Warm white	3000K	12W	850lm	40°	700mA		40cm	87mm	100mm	50	Requires 700mA driver
10112H/W/EW	White	Extra warm white	2700K	12W	850lm	40°	700mA		40cm	87mm	100mm	50	Requires 700mA driver

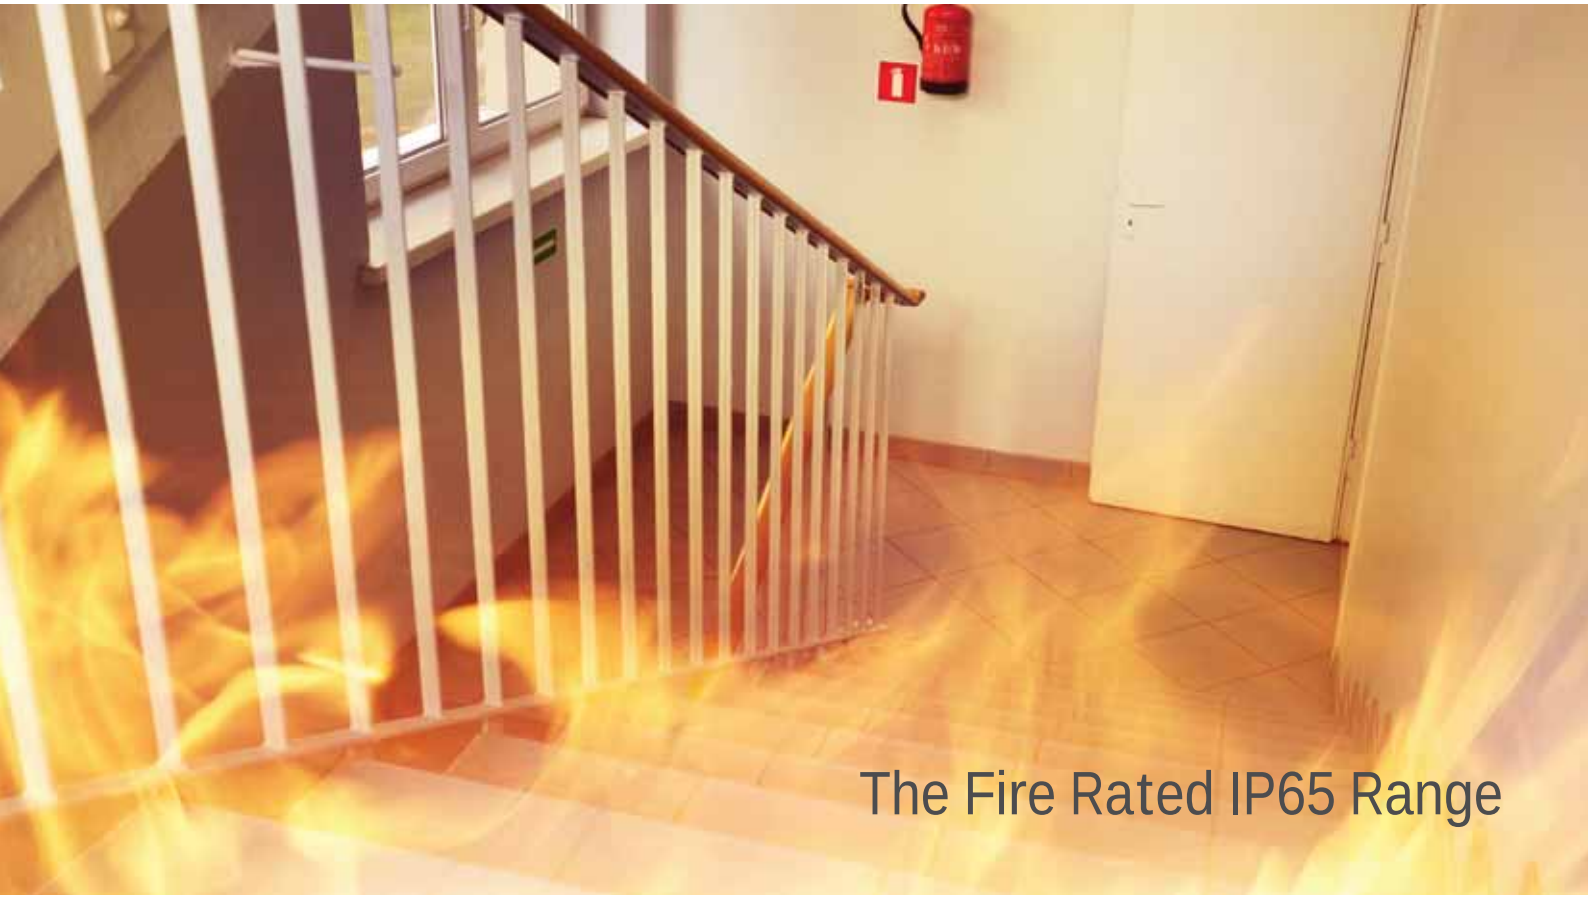

The Fire Rated IP65 Range



10106DF | 6W | COB LED | Fire Rated | Die cast

IP65 80 CRI FIRE RATED

DIMMABLE QUICK FIX DARK LIGHT CE







10106PF | 6W | COB LED | Fire Rated | Die cast

Ring must be ordered separately.

IP65 80 CRI FIRE RATED

DIMMABLE QUICK FIX CE



Dimensions are complete with the ring.





050042 | Round rings for 10106PF

050042A | Square rings for 10106PF

CE



050042/W	050042A/W	White
050042/B	050042A/B	Black
050042/MC	050042A/MC	Brushed chrome
050042/C	050042A/C	Chrome

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10106DF/W/W	White	Warm white	3000K	6W	500lm	40°	350mA	III	40cm	75cm	140cm	20	Requires 350mA driver
10106PF/C	-	Cool white	4000K	6W	530lm	40°	350mA	III	40cm	68mm	90mm	20	Requires 350mA driver
10106PF/W	-	Warm white	3000K	6W	500lm	40°	350mA	III	40cm	68mm	90mm	20	Requires 350mA driver



The Bathroom COB Range

Aluminium



10103P | 1W/3W | COB LED | Aluminium

1W@350mA / 3W@700mA

IP65 80 CRI

DIMMABLE QUICK FIX CE







10105W | 5W | COB LED | Aluminium

IP44 80 CRI

CE







10107W | 7W | COB LED | Aluminium

IP44 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S				Notes
10103P/AL/D	Aluminium	Daylight	6000K	1W/3W	210lm@3W	30°	350mA/700mA	III	60cm	37mm	60mm	100	Requires 350mA/700mA driver
10103P/AL/C	Aluminium	Cool white	4000K	1W/3W	200lm@3W	30°	350mA/700mA	III	60cm	37mm	60mm	100	Requires 350mA/700mA driver
10103P/AL/W	Aluminium	Warm white	3000K	1W/3W	190lm@3W	30°	350mA/700mA	III	60cm	37mm	60mm	100	Requires 350mA/700mA driver
10103P/W/C	White	Cool white	4000K	1W/3W	200lm@3W	30°	350mA/700mA	III	60cm	37mm	60mm	100	Requires 350mA/700mA driver
10103P/W/W	White	Warm white	3000K	1W/3W	190lm@3W	30°	350mA/700mA	III	60cm	37mm	60mm	100	Requires 350mA/700mA driver
10103P/B/W	Black	Warm white	3000K	1W/3W	190lm@3W	30°	350mA/700mA	III	60cm	37mm	60mm	100	Requires 350mA/700mA driver
10103P/B/BL	Black	Blue	-	1W/3W	-	60°	350mA/700mA	III	60cm	37mm	60mm	100	Requires 350mA/700mA driver
10105W/AL/W	Aluminium	Warm white	3000K	5W	425lm	30°	230V	□	-	57mm	90mm	30	Complete with driver
10107W/AL/W	Aluminium	Warm white	3000K	7W	507lm	30°	100-240V	□	-	68mm	95mm	30	Complete with driver
10107W/W/W	White	Warm white	3000K	7W	507lm	30°	100-240V	□	-	68mm	95mm	30	Complete with driver



The Bathroom COB High Power



10112P/AL | 12W | COB LED | Natural aluminium

IP64 80 CRI

DIMMABLE QUICK FIX CE







10112P | 12W | COB LED | Die cast

IP64 80 CRI

DIMMABLE QUICK FIX CE







10113P | 15W | COB LED | Natural aluminium

IP54 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10112P/AL/W	Aluminium	Warm white	3000K	12W	1100lm	40°	700mA		40cm	70mm	105mm	50	Requires 700mA driver
10112P/W/C	White	Cool white	4000K	12W	1100lm	40°	700mA		40cm	70mm	105mm	50	Requires 700mA driver
10112P/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA		40cm	70mm	105mm	50	Requires 700mA driver
10112P/B/W	Black	Warm white	3000K	12W	1100lm	40°	700mA		40cm	70mm	105mm	50	Requires 700mA driver
10112P/MC/W	Brushed chrome	Warm white	3000K	12W	1100lm	40°	700mA		40cm	70mm	105mm	50	Requires 700mA driver
10113P/AL/W	Aluminium	Warm white	3000K	15W	1000lm	50°	100-240V		-	75mm	120mm	30	Complete with driver



The COB Dark Light IP44 & IP54



10101L | 1W | LED | Aluminium

Driver can not pass through the cutout hole.

IP44 85 CRI

DIMMABLE QUICK FIX CE








10107DL | 7W | COB LED | Aluminium

IP44 80 CRI

DIMMABLE QUICK FIX DARK LIGHT CE



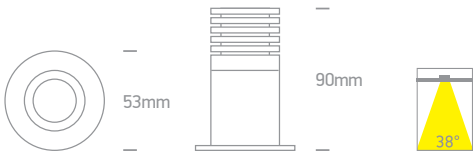




10107WD | 7W | COB LED | Die cast

IP54 90 CRI

DIMMABLE QUICK FIX DARK LIGHT CE








10107DB | 7W | COB LED | Aluminium

IP54 80 CRI

DIMMABLE QUICK FIX DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10101L/W/W	White	Warm white	3000K	1W	70lm	-	350mA	III	100cm	12mm	30mm	100	Requires 350mA driver
10101L/W/BL	White	Blue	-	1W	-	-	350mA	III	100cm	12mm	30mm	100	Requires 350mA driver
10107DL/W/W	White	Warm white	3000K	7W	450lm	38°	700mA	III	40cm	42mm	100mm	50	Requires 700mA driver
10107WD/W/C	White	Cool white	4000K	7W	530lm	36°	700mA	III	40cm	75mm	110mm	50	Requires 700mA driver
10107WD/W/W	White	Warm white	3000K	7W	500lm	36°	700mA	III	40cm	75mm	110mm	50	Requires 700mA driver
10107DB/W/C	White	Cool white	4000K	7W	500lm	36°	700mA	III	40cm	60mm	80mm	50	Requires 700mA driver
10107DB/W/W	White	Warm white	3000K	7W	500lm	36°	700mA	III	40cm	60mm	80mm	50	Requires 700mA driver



The Dark Light IP65 Range

Aluminium




10102H | 2W | LED | Aluminium

IP65 85 CRI

DIMMABLE QUICK FIX DARK LIGHT CE








10107H | 7W | COB LED | Aluminium


IP65 90 CRI

DIMMABLE DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10102H/W/C	White	Cool white	4000K	2W	100lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10102H/W/W	White	Warm white	3000K	2W	100lm	30°	700mA	III	100cm	30mm	50mm	100	Requires 700mA driver
10107H/W/C	White	Cool white	4000K	7W	530lm	36°	700mA	III	40cm	60mm	90mm	60	Requires 700mA driver
10107H/W/W	White	Warm white	3000K	7W	500lm	36°	700mA	III	40cm	60mm	90mm	60	Requires 700mA driver

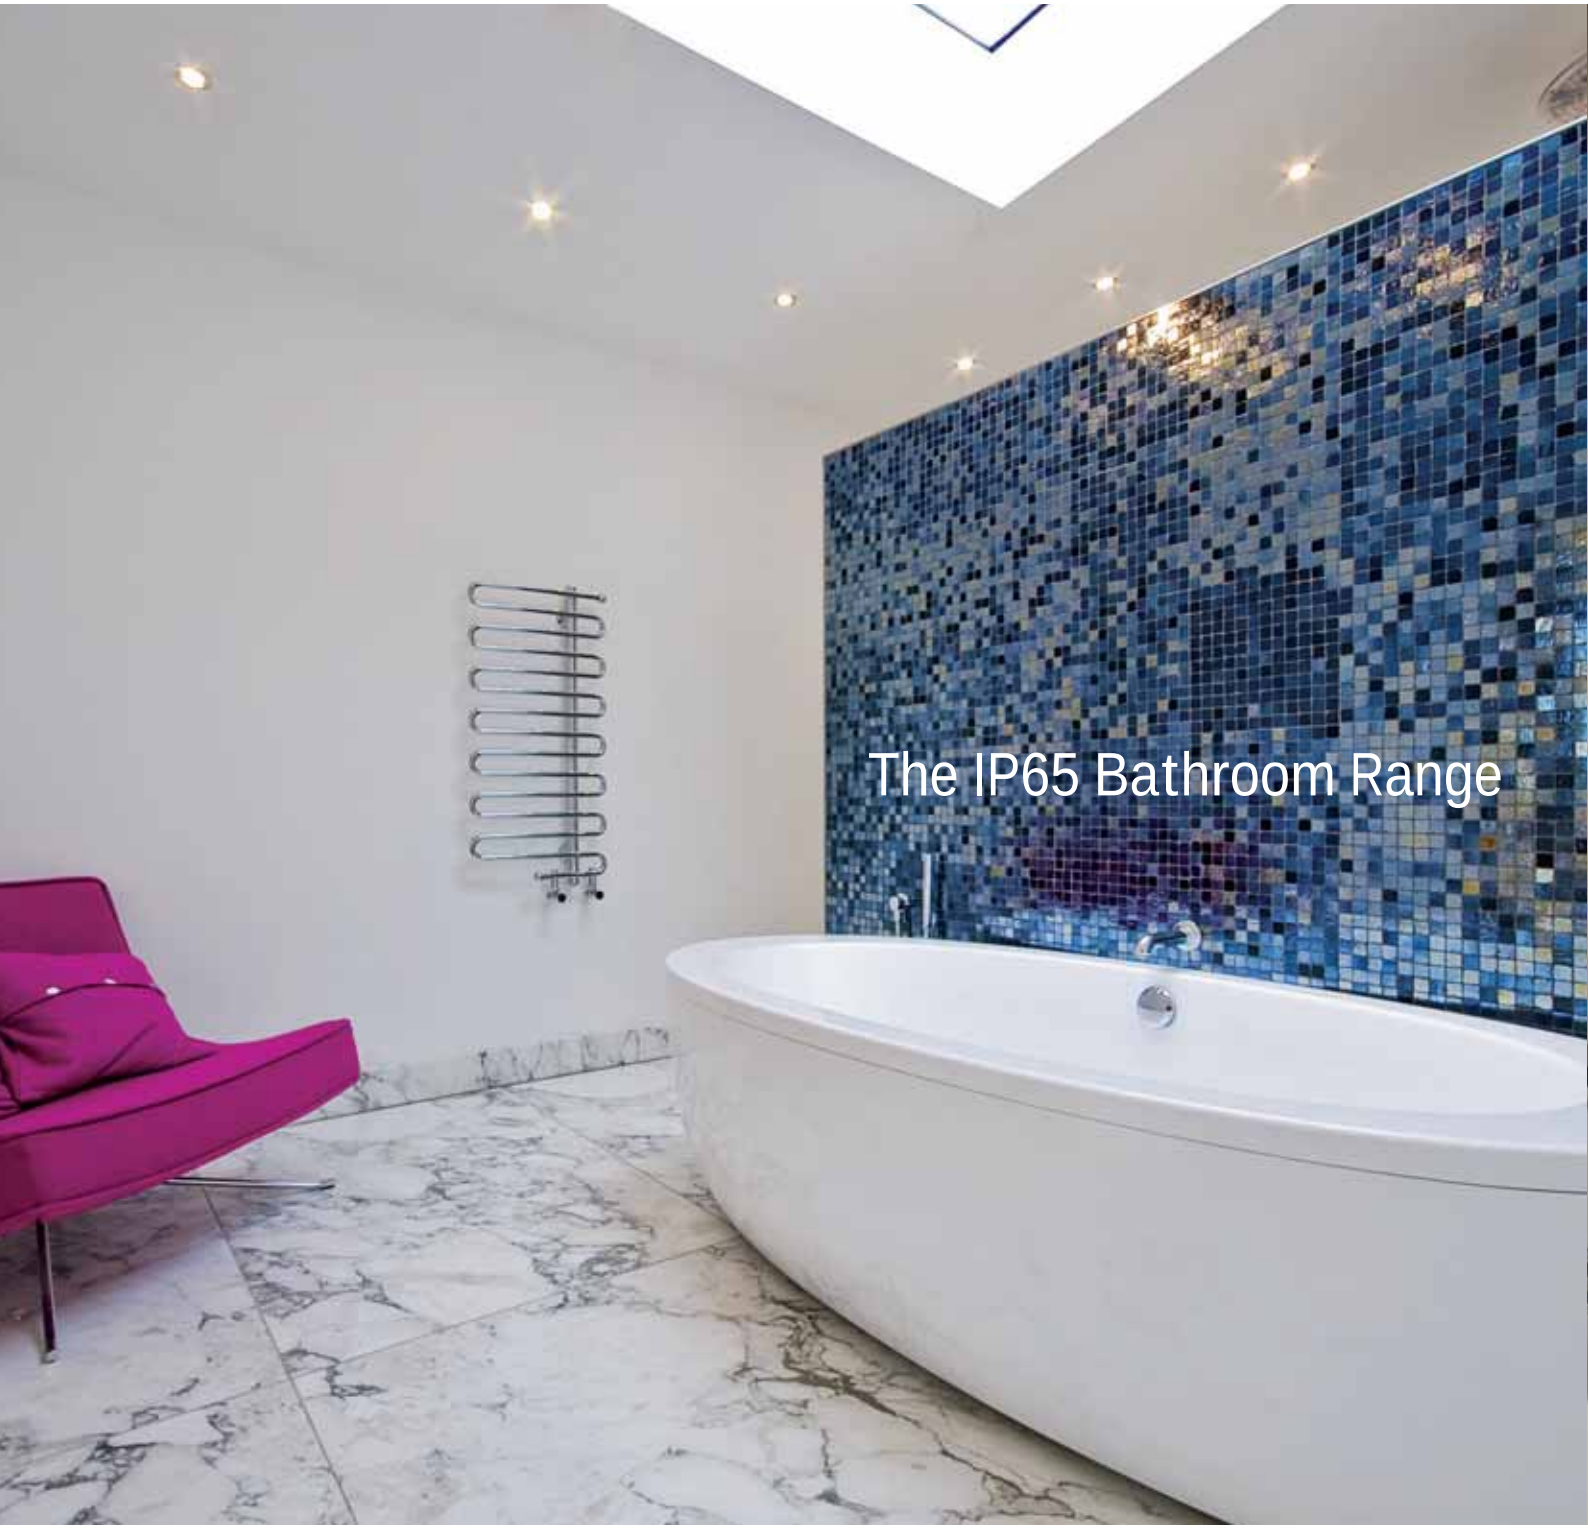



10106P | 6W | SMD 2835 | Plastic


IP65 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10106P/W/C	White	Cool white	4000K	6W	440lm	100°	230V	☐	68mm	80mm	48	Complete with driver
10106P/W/W	White	Warm white	3000K	6W	415lm	100°	230V	☐	68mm	80mm	48	Complete with driver

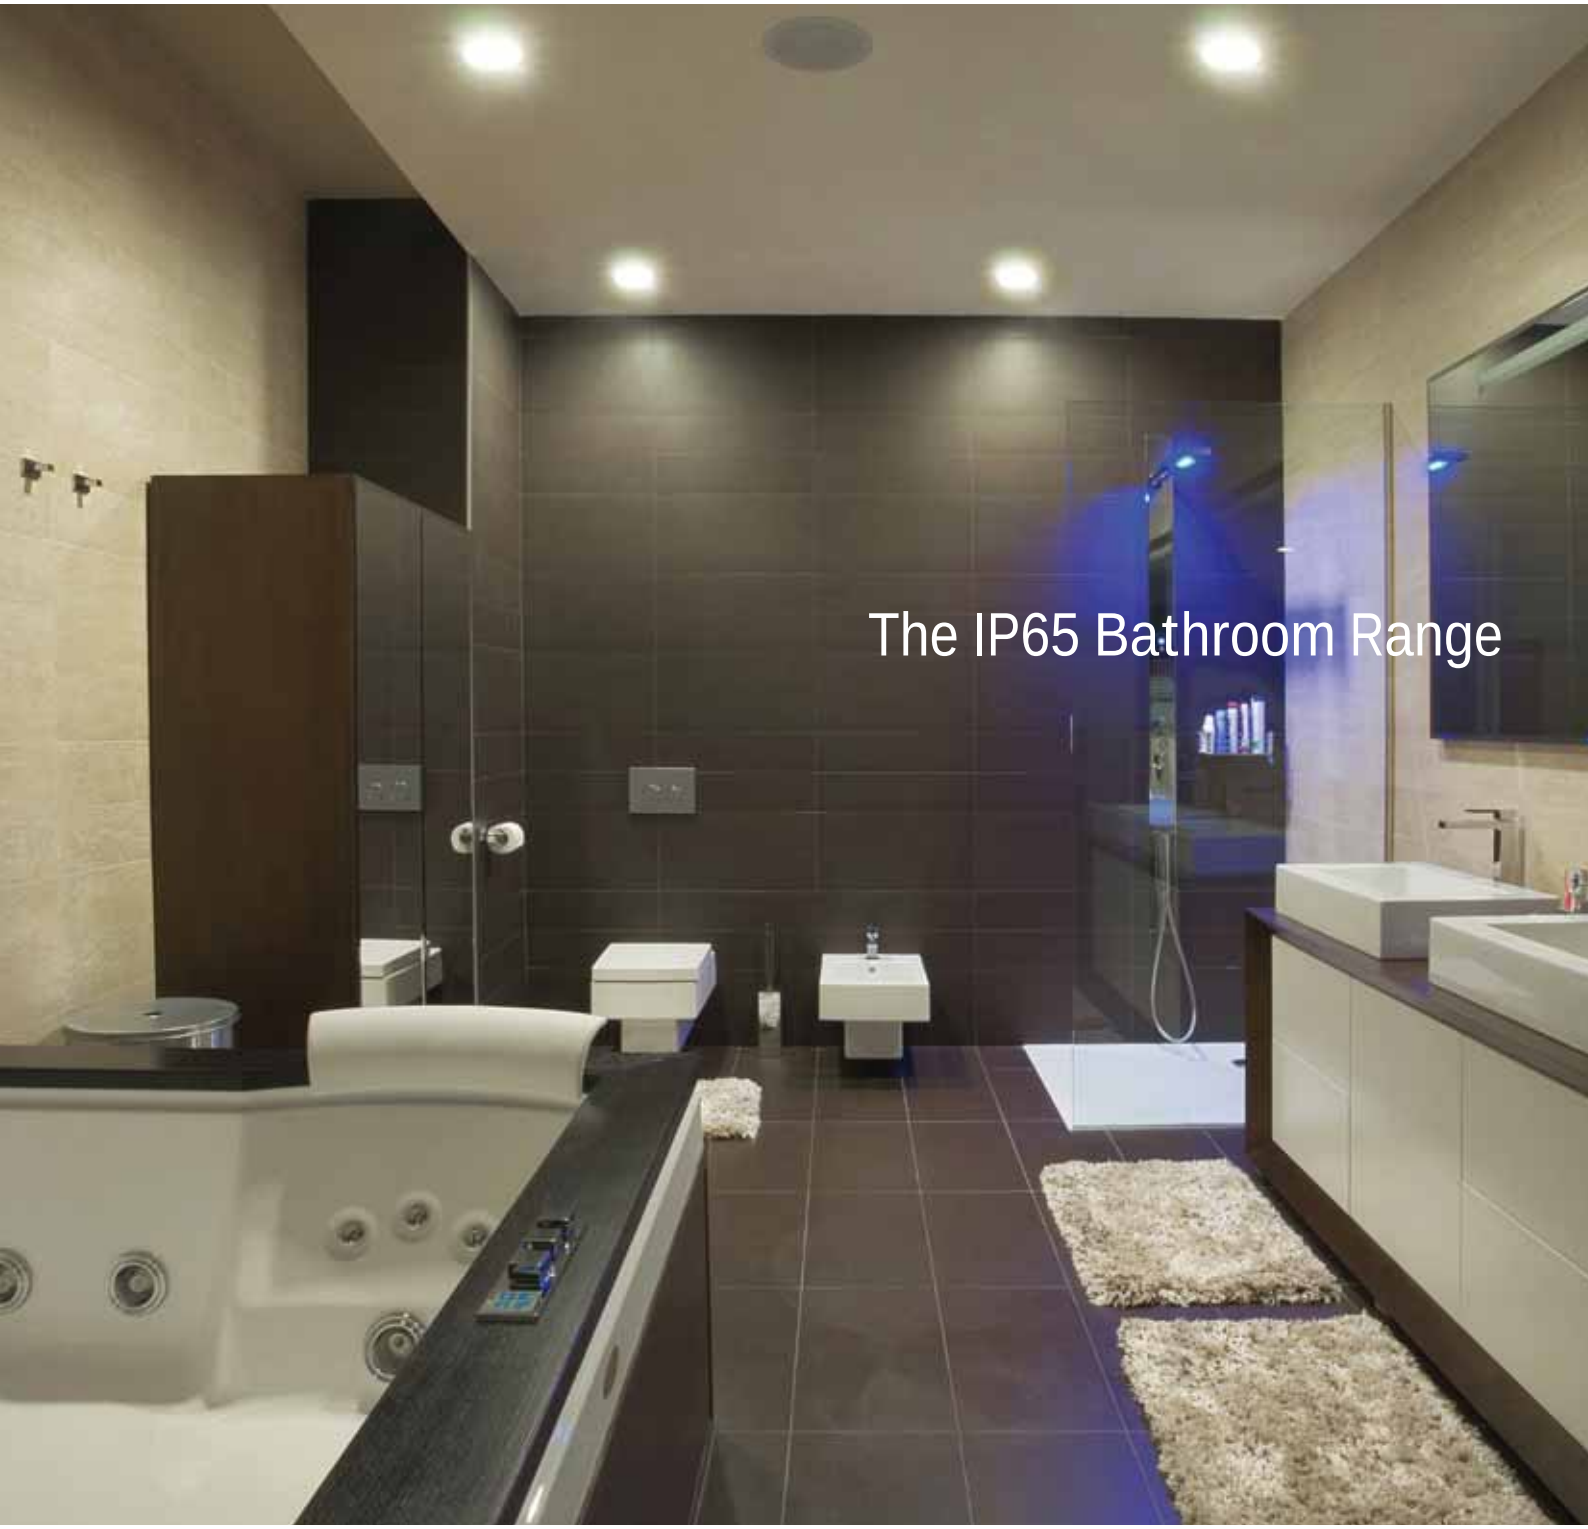



10103NP | 3x1W | LED | Natural aluminium

IP65

DIMMABLE


QUICK FIX





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10103NP/AL/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA	III	200cm	70mm	70mm	50	Requires 350mA driver
10103NP/AL/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA	III	200cm	70mm	70mm	50	Requires 350mA driver



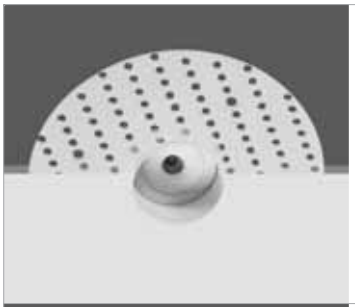


10101TR | 1W | COB LED | Trimless | Aluminium

Driver can not pass through the cutout hole.

IP44 85 CRI

DIMMABLE QUICK FIX DARK LIGHT CE



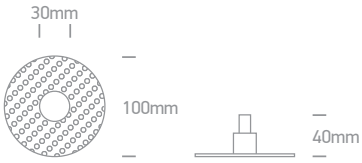




10103TR | 3W | COB LED | Trimless | Aluminium

Driver 89004 can pass through the cutout hole.

IP20 90 CRI

DIMMABLE QUICK FIX DARK LIGHT CE



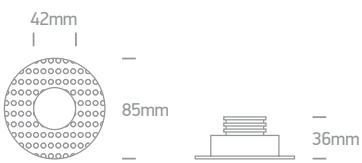

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10101TR/W/W	White	Warm white	3000K	1W	90lm	45°	350mA	III	200cm	40mm	50mm	40	Requires 350mA driver
10103TR/W/W	White	Warm white	3000K	3W	250lm	36°	350mA	III	40cm	50mm	50mm	60	Requires 350mA driver 89004



50103GT4/W



10107BT/W/W



10101TR/W/W

The Trimless Range




10107BT | 7W | COB LED | Trimless | Die cast

IP54 80 CRI

DIMMABLE QUICK FIX DARK LIGHT CE







50103GT4 | 2,5W | SMD LED | Trimless | Gypsum

IP44 80 CRI

DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107BT/W/W	White	Warm white	3000K	7W	500lm	38°	700mA		40cm	83mm	90mm	30	Requires 700mA driver
50103GT4/W	White	Warm white	3000K	2,5W	15lm	-	100-240V		-	121x121mm	70mm	24	Complete with driver



LED Decorative Range



10107C | 7W | COB LED | Ambient colour light | Die cast

IP20 80 CRI

DIMMABLE QUICK FIX CE



Interchangeable rings.





10107R | 5W | SMD 3030 | Aluminium

IP20 80 CRI

DARK LIGHT CE







10103GL | 3x1W | LED | Aluminium + acrylic

IP20

DIMMABLE QUICK FIX CE







10103A | 3x1W + 18 SMD LED Ring | LED | Natural aluminium + PC

Colours can be switched separately.

IP42

DIMMABLE QUICK FIX CE



Dual colour:
Daylight + Blue



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107C/W/W	White	Warm white	3000K	7W	635lm	40°	700mA		40cm	88mm	90mm	64	Requires 700mA driver
10107R/W/W	White	Warm white	3000K	5W	270lm	-	100-240V		-	95mm	60mm	30	Complete with driver
10103GL/D	-	Daylight	6000K	3x1W	180lm	-	350mA		40cm	55mm	50mm	36	Requires 350mA driver
10103GL/W	-	Warm white	3000K	3x1W	135lm	-	350mA		40cm	55mm	50mm	36	Requires 350mA driver
10103A/D/BL	Aluminium	Daylight + Blue	6000K	3/1,8W	-	-	350mA		40cm	77mm	50mm	100	Requires 2x350mA drivers
10103A/W/D	Aluminium	Warm white + Daylight	3000K+6000K	3/1,8W	-	-	350mA		40cm	77mm	50mm	100	Requires 2x350mA drivers




The LED Glass Range



10101G | 1W | LED | Acrylic

IP20 DIMMABLE QUICK FIX CE









10103G | 3x1W | LED | Acrylic

IP20 DIMMABLE QUICK FIX CE









10106G | 6x1W | LED | Acrylic

IP20 DIMMABLE QUICK FIX CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
10101G/D	Clear	Daylight	6000K	1W	60lm	350mA		40cm	40mm	45mm	80	Requires 350mA driver
10103G/D	Clear	Daylight	6000K	3x1W	145lm	350mA		40cm	66mm	50mm	64	Requires 350mA driver
10103G/W	Clear	Warm white	3000K	3x1W	100lm	350mA		40cm	66mm	50mm	64	Requires 350mA driver
10106G/D	Clear	Daylight	6000K	6x1W	295lm	350mA		40cm	100mm	60mm	32	Requires 350mA driver
10106G/W	Clear	Warm white	3000K	6x1W	205lm	350mA		40cm	100mm	60mm	32	Requires 350mA driver





03

Recessed Spots Adjustable

Pages 45-72

MR11 | MR16 | GU4 | GU5,3 | GU10

Die cast | Natural aluminium | Steel | Gypsum | Trimless

IP20

ADJUSTABLE ADJUSTABLE DARK LIGHT CE





The Classic Adjustable Round


11103A/G

11103A | 35W | MR11 | GU4 | Die cast

IP20 ADJUSTABLE


Suitable for LED lamps.




11103A/MC


11103A/C


11103A/BS


11103A/BBS


11103A/ABS


11105/W

11105 | 50W | MR16 | GU5,3 | Die cast

IP20 ADJUSTABLE


Suitable for LED lamps.




11105/MC


11105/C


11105/BS

Order Code	Colour	Watts	Input	Class					Notes
11103A/G	Grey	35W	12V	III	40cm	57mm	35mm	100	-
11103A/MC	Brushed chrome	35W	12V	III	40cm	57mm	35mm	100	-
11103A/C	Chrome	35W	12V	III	40cm	57mm	35mm	100	-
11103A/BS	Brass	35W	12V	III	40cm	57mm	35mm	100	-
11103A/BBS	Brushed brass	35W	12V	III	40cm	57mm	35mm	100	-
11103A/ABS	Antique brass	35W	12V	III	40cm	57mm	35mm	100	-
11105/W	White	50W	12V	III	40cm	75mm	55mm	100	-
11105/MC	Brushed chrome	50W	12V	III	40cm	75mm	55mm	100	-
11105/C	Chrome	50W	12V	III	40cm	75mm	55mm	100	-
11105/BS	Brass	50W	12V	III	40cm	75mm	55mm	100	-





11105GU/G

11105GU | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE

CE



Suitable for LED lamps.





11105GU/W



11105GU/B



11105GU/MC



11105GU/C



11105GU/ABS

Order Code	Colour	Watts	Input	Class					Notes
11105GU/W	White	50W	100-240V		15cm	75mm	95mm	100	-
11105GU/B	Black	50W	100-240V		15cm	75mm	95mm	100	-
11105GU/G	Grey	50W	100-240V		15cm	75mm	95mm	100	-
11105GU/MC	Brushed chrome	50W	100-240V		15cm	75mm	95mm	100	-
11105GU/C	Chrome	50W	100-240V		15cm	75mm	95mm	100	-
11105GU/ABS	Antique brass	50W	100-240V		15cm	75mm	95mm	100	-



The Lock Ring Range

Die cast



11103C | 35W | MR11 | GU4 | Die cast

IP20 ADJUSTABLE

CE



Suitable for LED lamps.





11105C/W

11105C | 50W | MR16 | GU5,3 | Die cast

IP20 ADJUSTABLE

CE



Suitable for LED lamps.





11105C/G



11105C/MC



11105C/C



11105C/ABS



11105C/N



11105CF | 35W | MR16 | GU10 | Firehood | Die cast

IP20 ADJUSTABLE

CE





Order Code	Colour	Watts	Input	Class					Notes
11103C/C	Chrome	35W	12V		40cm	63mm	40mm	100	-
11105C/W	White	50W	12V		40cm	82mm	60mm	100	-
11105C/G	Grey	50W	12V		40cm	82mm	60mm	100	-
11105C/MC	Brushed chrome	50W	12V		40cm	82mm	60mm	100	-
11105C/C	Chrome	50W	12V		40cm	82mm	60mm	100	-
11105C/ABS	Antique brass	50W	12V		40cm	82mm	60mm	100	-
11105C/N	Natural	50W	12V		40cm	82mm	60mm	100	-
11105CF/W	White	35W	100-240V		-	87mm	180mm	50	-
11105CF/MC	Brushed chrome	35W	100-240V		-	87mm	180mm	50	-



The Lock Ring GU10 Range

Die cast



11105CGU/W

11105CGU | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE

CE



Suitable for LED lamps.





11105CGU/G



11105CGU/MC



11105CGU/C




51105CGU | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE

CE



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class					Notes
11105CGU/W	White	50W	100-240V		15cm	82mm	95mm	100	-
11105CGU/G	Grey	50W	100-240V		15cm	82mm	95mm	100	-
11105CGU/MC	Brushed chrome	50W	100-240V		15cm	82mm	95mm	100	-
11105CGU/C	Chrome	50W	100-240V		15cm	82mm	95mm	100	-
51105CGU/W	White	50W	100-240V		15cm	78mm	100mm	100	-
51105CGU/MC	Brushed chrome	50W	100-240V		15cm	78mm	100mm	100	-





10105B | 50W | MR16 | GU10 | Semi trimless | Aluminium

IP20 ADJUSTABLE

DARK LIGHT CE









11105CD | 50W | MR16 | GU5,3 | Die cast

IP20 ADJUSTABLE

DARK LIGHT CE









51105CD | 50W | MR16 | GU5,3 | Die cast

IP20 ADJUSTABLE

DARK LIGHT CE







Order Code	Colour	Watts	Input	Class					Notes
10105B/AL	Aluminium	50W	100-240V		15cm	90mm	130mm	20	-
11105CD/MC	Brushed chrome	50W	12V		40cm	85mm	100mm	50	-
51105CD/MC	Brushed chrome	50W	12V		40cm	85mm	100mm	50	-



Box Set

Die cast



11105GU3 | 4W (x3) | MR16 | GU10 | Die cast


IP20 ADJUSTABLE

CE

GU10 LED Lamp.



3000K 38° 320lm.



Order Code	Colour	Watts	Input	Class					Notes
11105GU3/MC/W	Brushed chrome	4W (x3)	230V	⏚	15cm	75mm	95mm	20	Complete with 7304BG/W/38 lamps



The Classic Square GU10

Die cast



51105GU/W


51105GU | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE

CE



Suitable for LED lamps.





51105GU/MC


51105GU | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE

CE



Suitable for LED lamps.





51105GA/W


51105GA | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE

CE



Supplied with GU10 50W halogen lamp.





51105GA/MC


51105GA | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE

CE



Supplied with GU10 50W halogen lamp.



Order Code	Colour	Watts	Input	Class					Notes
51105GU/W	White	50W	100-240V		15cm	73mm	100mm	100	-
51105GU/MC	Brushed chrome	50W	100-240V		15cm	73mm	100mm	100	-
51105GA/W	White	50W	230V		15cm	73mm	100mm	50	Supplied with GU10 lamp
51105GA/MC	Brushed chrome	50W	230V		15cm	73mm	100mm	50	Supplied with GU10 lamp



The Classic Square

Die cast



51103/W

51103 | 35W | MR11 | GU4 | Die cast

IP20 ADJUSTABLE

CE



51103/C





51103/MC

51103 | 35W | MR11 | GU4 | Die cast

IP20 ADJUSTABLE

CE



51103/C





51105/W


51105 | 50W | MR16 | GU5,3 | Die cast

IP20 ADJUSTABLE

CE



51105/C





51105/MC

51105 | 50W | MR16 | GU5,3 | Die cast

IP20 ADJUSTABLE

CE



51105/C



Order Code	Colour	Watts	Input	Class					Notes
51103/W	White	35W	12V	III	40cm	56mm	45mm	100	-
51103/MC	Brushed chrome	35W	12V	III	40cm	56mm	45mm	100	-
51103/C	Chrome	35W	12V	III	40cm	56mm	45mm	100	-
51105/W	White	50W	12V	III	40cm	75mm	65mm	100	-
51105/MC	Brushed chrome	50W	12V	III	40cm	75mm	65mm	100	-
51105/C	Chrome	50W	12V	III	40cm	75mm	65mm	100	-





11105AB/AL

11105AB | 50W | MR16 | GU5,3 | Aluminium

IP20


ADJUSTABLE



11105AB/W



11105AB/B





51105AB/AL

51105AB | 50W | MR16 | GU5,3 | Aluminium

IP20


ADJUSTABLE



51105AB/W



51105AB/B



Order Code	Colour	Watts	Input	Class					Notes
11105AB/AL	Aluminium	50W	12V	III	40cm	80mm	75mm	50	-
11105AB/W	White	50W	12V	III	40cm	80mm	75mm	50	-
11105AB/B	Black	50W	12V	III	40cm	80mm	75mm	50	-
51105AB/AL	Aluminium	50W	12V	III	40cm	80mm	75mm	50	-
51105AB/W	White	50W	12V	III	40cm	80mm	75mm	50	-
51105AB/B	Black	50W	12V	III	40cm	80mm	75mm	50	-



The Dual Ring GU10 Range

Aluminium



11105ABG/W

11105ABG | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

CE



11105ABG/AL





51105ABG/W

51105ABG | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

CE



51105ABG/AL





51205ABG | 2x50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

CE



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class					Notes
11105ABG/AL	Aluminium	50W	100-240V		15cm	80mm	100mm	50	-
11105ABG/W	White	50W	100-240V		15cm	80mm	100mm	50	-
51105ABG/AL	Aluminium	50W	100-240V		15cm	80mm	100mm	50	-
51105ABG/W	White	50W	100-240V		15cm	80mm	100mm	50	-
51205ABG/AL	Aluminium	2x50W	100-240V		15cm	162x82mm	100mm	20	-
51205ABG/W	White	2x50W	100-240V		15cm	162x82mm	100mm	20	-
51205ABG/B	Black	2x50W	100-240V		15cm	162x82mm	100mm	20	-



The Dual Ring Range

Natural aluminium



11103AB | 35W | MR11 | GU4 | Natural aluminium

IP20 ADJUSTABLE

CE



Suitable for LED lamps.





11105AC | 50W | MR16 | GU5,3 | Natural aluminium

IP20 ADJUSTABLE

CE



Suitable for LED lamps.






11105AL | 50W | MR16 | GU5,3 | Natural aluminium

IP20 ADJUSTABLE

CE





Order Code	Colour	Watts	Input	Class					Notes
11103AB/AL	Aluminium	35W	12V	III	40cm	60mm	60mm	50	-
11105AC/AL	Aluminium	50W	12V	III	40cm	75mm	60mm	50	-
11105AL/AL	Aluminium	50W	12V	III	40cm	68mm	70mm	50	-






51103AB | 35W | MR11 | GU4 | Natural aluminium

IP20 ADJUSTABLE

CE



Suitable for LED lamps.






51105AL | 50W | MR16 | GU5,3 | Natural aluminium

IP20 ADJUSTABLE

CE





Order Code	Colour	Watts	Input	Class					Notes
51103AB/AL	Aluminium	35W	12V	III	40cm	60mm	60mm	50	-
51105AL/AL	Aluminium	50W	12V	III	40cm	80mm	70mm	50	-



Round Retro Range GU10

Aluminium




11105U | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

CE








11105UA | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

CE








11105UB | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

CE





Order Code	Colour	Watts	Input	Class					Notes
11105U/W	White	50W	100-240V		15cm	72mm	120mm	50	-
11105UA/W	White	50W	100-240V		15cm	72mm	120mm	50	-
11105UB/W	White	50W	100-240V		15cm	72mm	120mm	50	-



Square Retro Range GU10
Aluminium




51105U | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

CE








51105UA | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

CE



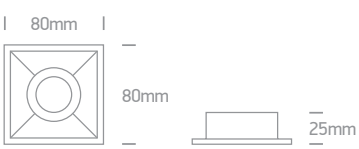

Order Code	Colour	Watts	Input	Class					Notes
51105U/W	White	50W	100-240V	⏚	15cm	72mm	120mm	50	-
51105UA/W	White	50W	100-240V	⏚	15cm	72mm	120mm	50	-



Dark Light Round Spots




11105D4 | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

DARK LIGHT CE









11105DT | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

DARK LIGHT CE









11105TG | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE

DARK LIGHT CE









11105CDG | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE

CE










11105E | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE

DARK LIGHT CE







Order Code	Colour	Watts	Input	Class					Notes
11105D4/W	White	50W	100-240V		15cm	75mm	140mm	50	-
11105DT/W	White	50W	100-240V		15cm	95mm	140mm	50	-
11105TG/W	White	50W	100-240V		15cm	85mm	110mm	50	-
11105CDG/W	White	50W	100-240V		15cm	90mm	110mm	50	-
11105E/W	White	50W	100-240V		15cm	75mm	120mm	100	-



Dark Light Square Spots


Die cast



51105TG | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE
DARK LIGHT CE







51105CDG | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE
CE








51105DG | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE
DARK LIGHT CE








51105D | 50W | MR16 | GU5,3 | Die cast

IP20 ADJUSTABLE
DARK LIGHT CE





Order Code	Colour	Watts	Input	Class					Notes
51105TG/W	White	50W	100-240V		15cm	80x80mm	110mm	50	-
51105CDG/W	White	50W	100-240V		15cm	90mm	110mm	50	-
51105DG/W	White	50W	100-240V		15cm	80x80mm	85mm	50	-
51105D/W	White	50W	12V		40cm	80x80mm	85mm	50	-
51105D/G	Grey	50W	12V		40cm	80x80mm	85mm	50	-
51105D/MC	Brushed chrome	50W	12V		40cm	80x80mm	85mm	50	-



Swivel Spot

Die cast




11105S | 50W | MR16 | GU5,3 | Die cast


IP20 ADJUSTABLE

CE





Order Code	Colour	Watts	Input	Class					Notes
11105S/MC	Brushed chrome	50W	12V	III	40cm	93mm	65mm	50	-

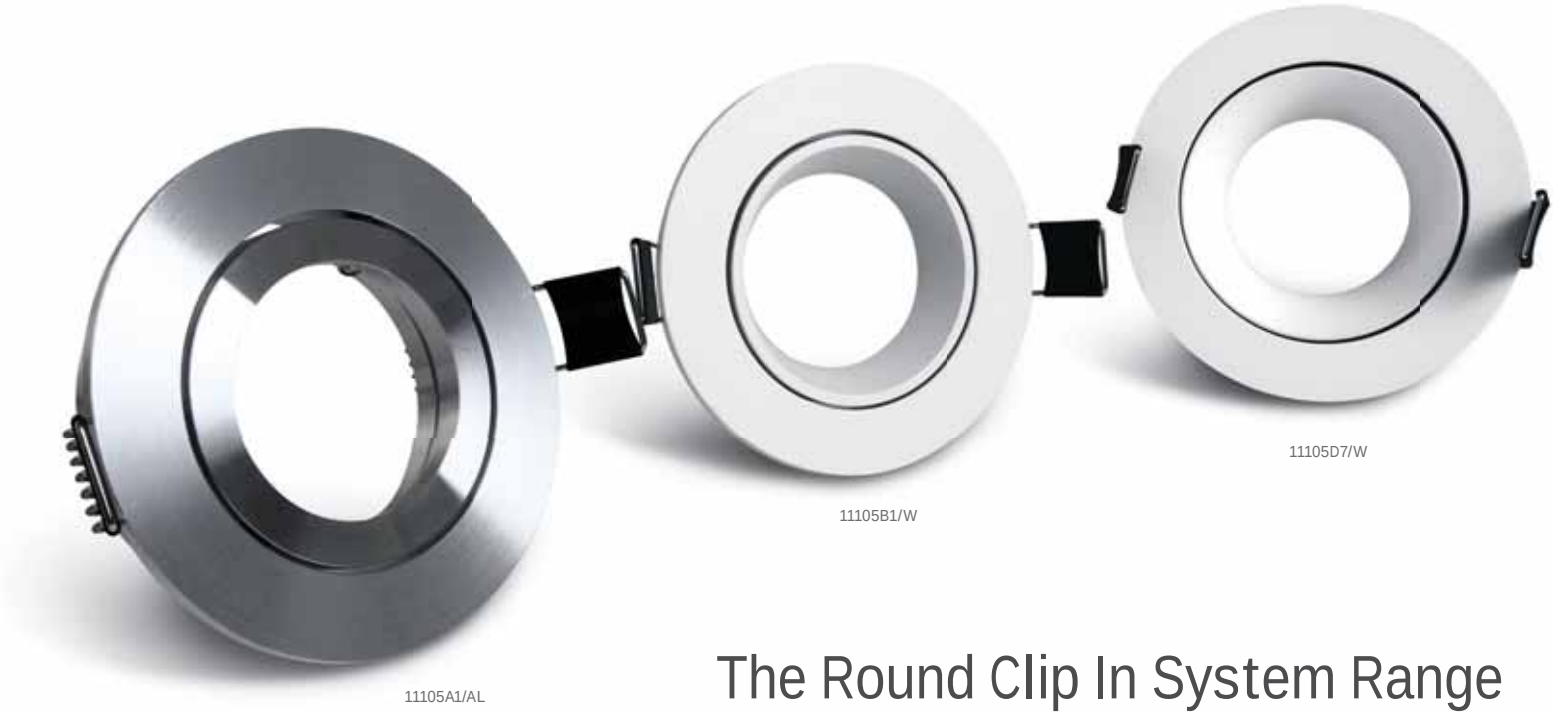

The Round Clip In System Range

Aluminium



11105A1/W

11105A1 | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

CE



11105A1/AL





11105B1/W

11105B1 | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

CE



11105B1/AL





11105D7 | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

CE





Order Code	Colour	Watts	Input	Class					Notes
11105A1/AL	Aluminium	50W	100-240V		15cm	68mm	120mm	100	-
11105A1/W	White	50W	100-240V		15cm	68mm	120mm	100	-
11105B1/AL	Aluminium	50W	100-240V		15cm	72mm	120mm	100	-
11105B1/W	White	50W	100-240V		15cm	72mm	120mm	100	-
11105D7/W	White	50W	100-240V		15cm	82mm	130mm	50	-



The Dark Light Tube Range

Aluminium




11105D5 | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

DARK LIGHT CE








11105D6 | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

DARK LIGHT CE








11105D8 | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

DARK LIGHT CE








51105D5 | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

DARK LIGHT CE



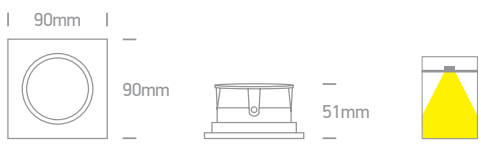

Order Code	Colour	Watts	Input	Class					Notes
11105D5/W	White	50W	100-240V		15cm	75mm	130mm	50	-
11105D6/W	White	50W	100-240V		15cm	75mm	130mm	50	-
11105D8/W	White	50W	100-240V		15cm	76mm	130mm	60	-
51105D5/W	White	50W	100-240V		15cm	75mm	130mm	50	-



The Semi Dark Light Tube Range

Aluminium



51105B1/W


51105B1 | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

CE



51105B1/AL






51105D7 | 50W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

CE





Order Code	Colour	Watts	Input	Class					Notes
51105B1/AL	Aluminium	50W	100-240V		15cm	72mm	120mm	50	-
51105B1/W	White	50W	100-240V		15cm	72mm	120mm	50	-
51105D7/W	White	50W	100-240V		15cm	82mm	130mm	50	-



Natural Aluminium Square




51105B | 50W | MR16 | GU5,3 | Natural aluminium

IP20 ADJUSTABLE

CE










51205B | 2x50W | MR16 | GU5,3 | Natural aluminium

IP20 ADJUSTABLE

CE










51305B | 3x50W | MR16 | GU5,3 | Natural aluminium

IP20 ADJUSTABLE

CE







Order Code	Colour	Watts	Input	Class					Notes
51105B/AL	Aluminium	50W	12V	III	40cm	77x77mm	70mm	50	-
51205B/AL	Aluminium	2x50W	12V	III	40cm	167x77mm	70mm	25	-
51305B/AL	Aluminium	3x50W	12V	III	40cm	252x77mm	70mm	15	-



11105N/W



51205N/W

Semi Dark Light GU10 Series

Die cast



11105N | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE

CE







51105N | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE

CE








51205N | 2x50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE

CE





Order Code	Colour	Watts	Input	Class					Notes
11105N/W	White	50W	100-240V	⏚	15cm	97mm	130mm	50	-
51105N/W	White	50W	100-240V	⏚	15cm	97x97mm	130mm	50	-
51205N/W	White	2x50W	100-240V	⏚	15cm	187x97mm	130mm	25	-



The 12V Box Square

Die cast




51105R | 50W | MR16 | GU5,3 | Die cast

IP20 ADJUSTABLE

CE



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class					Notes
51105R/G	Grey	50W	12V		40cm	95x95mm	120mm	18	-



The Dark Light Box
Steel



51105T | 50W | MR16 | GU5,3 | Steel

IP20 ADJUSTABLE

DARK LIGHT CE





Order Code	Colour	Watts	Input	Class					Notes
51105T/G	Grey	50W	12V	III	40cm	80x75mm	100mm	48	-



Square GU10

Die cast



51105F | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE

CE



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class					Notes
51105F/G	Grey	50W	100-240V		15cm	115x115mm	145mm	12	-



11105GT5



11105GT4



51105GT4

The Trimless GU10 Range

Gypsum




11105GT5 | 50W | MR16 | GU10 | Trimless | Gypsum

IP20 ADJUSTABLE

DARK LIGHT CE







11105GT4 | 50W | MR16 | GU10 | Trimless | Gypsum

IP20 ADJUSTABLE

DARK LIGHT CE








51105GT4 | 50W | MR16 | GU10 | Trimless | Gypsum

IP20 ADJUSTABLE


DARK LIGHT CE





Order Code	Colour	Watts	Input	Class					Notes
11105GT5	White	50W	100-240V		15cm	207x207mm	160mm	12	-
11105GT4	White	50W	100-240V		15cm	156mm	140mm	12	-
51105GT4	White	50W	100-240V		15cm	156x156mm	140mm	12	-



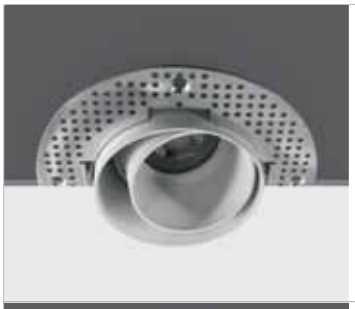


11105DTR | 50W | MR16 | GU10 | Trimless | Aluminium

IP20

ADJUSTABLE DARK LIGHT CE



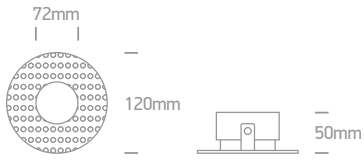



11105TR/W

11105TR | 50W | MR16 | GU10 | Trimless | Die cast


IP20

ADJUSTABLE DARK LIGHT CE



11105TR/B







51105TR | 50W | MR16 | GU10 | Trimless | Die cast

IP20

ADJUSTABLE DARK LIGHT CE





Order Code	Colour	Watts	Input	Class					Notes
11105DTR/W	White	50W	100-240V		15cm	90mm	120mm	36	-
11105TR/W	White	50W	100-240V		15cm	82mm	120mm	50	-
11105TR/B	Black	50W	100-240V		15cm	82mm	120mm	50	-
51105TR/W	White	50W	100-240V		15cm	83x83mm	120mm	50	-



Trimless Box

Die cast




51010TR | 50W | MR16 | GU5,3 | Trimless | Die cast

IP20 ADJUSTABLE

CE



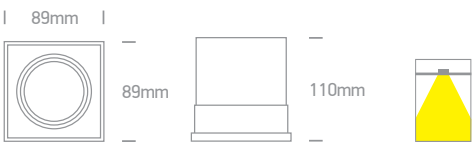




51020TR | 2x50W | MR16 | GU5,3 | Trimless | Die cast

IP20 ADJUSTABLE

CE





Order Code	Colour	Watts	Input	Class				Notes
51010TR/W	White	50W	12V	III	97,5x97,5mm	150mm	16	-
51010TR/B	Black	50W	12V	III	97,5x97,5mm	150mm	16	-
51020TR/W	White	2x50W	12V	III	181x97,5mm	150mm	12	-
51020TR/B	Black	2x50W	12V	III	181x97,5mm	150mm	12	-





04

Recessed Spots Adjustable LED

Pages 75-104

COB LED | SMD LED | LED

Die cast | Natural aluminium | Plastic | Trimless

IP20 IP40 IP44 IP54

ADJUSTABLE ADJUSTABLE DIMMABLE DARK LIGHT QUICK FIX FIRE RATED 80 CRI 85 CRI 90 CRI





11103B/AL/W



11103B/B/W



11103B/W/W

The 1W/3W Mini Series

Aluminium




11103B/AL | 1W/3W | COB LED | Aluminium — 1W@350mA / 3W@700mA

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE








11103B/W | 1W/3W | COB LED | Aluminium — 1W@350mA / 3W@700mA

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE








11103B/B | 1W/3W | COB LED | Aluminium — 1W@350mA / 3W@700mA

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103B/AL/W	Aluminium	Warm white	3000K	1W/3W	200lm@3W	40°	350mA/700mA	III	40cm	45mm	60mm	100	Requires 350mA/700mA driver
11103B/W/W	White	Warm white	3000K	1W/3W	200lm@3W	40°	350mA/700mA	III	40cm	45mm	60mm	100	Requires 350mA/700mA driver
11103B/B/W	Black	Warm white	3000K	1W/3W	200lm@3W	40°	350mA/700mA	III	40cm	45mm	60mm	100	Requires 350mA/700mA driver



The 1W Mini Lighter

Aluminium



11102 | 1W | LED | Aluminium

IP20 85 CRI ADJUSTABLE

DIMMABLE QUICK FIX CE








11101D | 1W | LED | Natural aluminium

IP20 ADJUSTABLE

DIMMABLE QUICK FIX DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11102/W/W	White	Warm white	3000K	1W	60lm	50°	350mA	III	40cm	45mm	30mm	100	Requires 350mA driver
11101D/D/15	Aluminium	Daylight	6000K	1W	60lm	15°	350mA	III	40cm	53mm	40mm	100	Requires 350mA driver



11101W/D/15



11101B/D/35

The 1W Mini Round

Aluminium



11101W | 1W | LED | Aluminium

IP20 ADJUSTABLE

DIMMABLE QUICK FIX CE






11101B | 1W | LED | Aluminium

IP20 ADJUSTABLE

DIMMABLE QUICK FIX CE

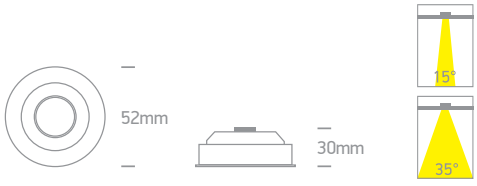

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11101W/D/15	White	Daylight	6000K	1W	60lm	15°	350mA	III	40cm	45mm	40mm	100	Requires 350mA driver
11101B/D/15	Black	Daylight	6000K	1W	60lm	15°	350mA	III	40cm	45mm	40mm	100	Requires 350mA driver
11101B/D/35	Black	Daylight	6000K	1W	60lm	35°	350mA	III	40cm	45mm	40mm	100	Requires 350mA driver




The 3W Mini Series
Aluminium



11103LC/W | 3W | LED | Aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE








11103LC/B | 3W | LED | Aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE



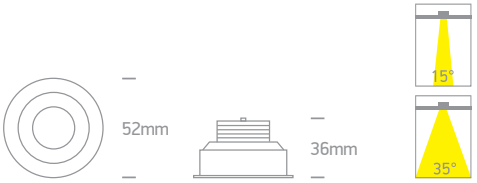




51103LC | 3W | LED | Natural aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103LC/W/D/15	White	Daylight	6000K	3W	120lm	15°	700mA	III	40cm	45mm	56mm	100	Requires 700mA driver
11103LC/B/D/15	Black	Daylight	6000K	3W	120lm	15°	700mA	III	40cm	45mm	56mm	100	Requires 700mA driver
11103LC/B/D/35	Black	Daylight	6000K	3W	120lm	35°	700mA	III	40cm	45mm	56mm	100	Requires 700mA driver
51103LC/AL/D/35	Aluminium	Daylight	6000K	3W	120lm	35°	700mA	III	40cm	53mm	55mm	100	Requires 700mA driver




The 1W Mini Square
Aluminium



51101AL | 1W | LED | Natural aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE








51101W | 1W | LED | Aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE








51101B | 1W | LED | Aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
51101AL/D/15	Aluminium	Daylight	6000K	1W	60lm	15°	350mA		40cm	53mm	40mm	100	Requires 350mA driver
51101AL/W/15	Aluminium	Warm white	3000K	1W	45lm	15°	350mA		40cm	53mm	40mm	100	Requires 350mA driver
51101AL/BL/15	Aluminium	Blue	-	1W	-	15°	350mA		40cm	53mm	40mm	100	Requires 350mA driver
51101W/D/35	White	Daylight	6000K	1W	60lm	35°	350mA		40cm	53mm	40mm	100	Requires 350mA driver
51101B/D/35	Black	Daylight	6000K	1W	60lm	35°	350mA		40cm	53mm	40mm	100	Requires 350mA driver


51101AL/D/15


51201AL/D/15


51301AL/D/35

The 1W Mini Square


Natural aluminium




51201AL | 2x1W | LED | Natural aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE











51301AL | 3x1W | LED | Natural aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE










51401AL | 4x1W | LED | Natural aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S				Notes
51201AL/D/15	Aluminium	Daylight	6000K	2x1W	2x60lm	15°	350mA	III	40cm	105x53mm	40mm	50	Requires 350mA driver
51201AL/D/35	Aluminium	Daylight	6000K	2x1W	2x60lm	35°	350mA	III	40cm	105x53mm	40mm	50	Requires 350mA driver
51201AL/W/15	Aluminium	Warm white	3000K	2x1W	2x45lm	15°	350mA	III	40cm	105x53mm	40mm	50	Requires 350mA driver
51301AL/D/15	Aluminium	Daylight	6000K	3x1W	3x60lm	15°	350mA	III	40cm	155x53mm	40mm	50	Requires 350mA driver
51301AL/D/35	Aluminium	Daylight	6000K	3x1W	3x60lm	35°	350mA	III	40cm	155x53mm	40mm	50	Requires 350mA driver
51301AL/W/15	Aluminium	Warm white	3000K	3x1W	3x45lm	15°	350mA	III	40cm	155x53mm	40mm	50	Requires 350mA driver
51301AL/W/35	Aluminium	Warm white	3000K	3x1W	3x45lm	35°	350mA	III	40cm	155x53mm	40mm	50	Requires 350mA driver
51401AL/D/15	Aluminium	Daylight	6000K	4x1W	4x60lm	15°	350mA	III	40cm	105x105mm	40mm	50	Requires 350mA driver
51401AL/D/35	Aluminium	Daylight	6000K	4x1W	4x60lm	35°	350mA	III	40cm	105x105mm	40mm	50	Requires 350mA driver
51401AL/W/15	Aluminium	Warm white	3000K	4x1W	4x45lm	15°	350mA	III	40cm	105x105mm	40mm	50	Requires 350mA driver
51401AL/W/35	Aluminium	Warm white	3000K	4x1W	4x45lm	35°	350mA	III	40cm	105x105mm	40mm	50	Requires 350mA driver

one



11103L/D/15

11103LW/D/35

The 3xLED Round Spots

Aluminium



11103L | 3x1W | LED | Natural aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE







11103LW | 3x1W | LED | Aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE







11103LB | 3x1W | LED | Aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE








11303L | 3x3W | LED | Natural aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103L/D/15	Aluminium	Daylight	6000K	3x1W	180lm	15°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103L/W/15	Aluminium	Warm white	3000K	3x1W	135lm	15°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103LW/D/35	White	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103LB/D/35	Black	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103LB/W/35	Black	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11303L/AL/D/35	Aluminium	Daylight	6000K	3x3W	360lm	35°	700mA	III	40cm	70mm	100mm	30	Requires 700mA driver



The 3x1W Square Spots


Aluminium



51103L | 3x1W | LED | Natural aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE








51103LW | 3x1W | LED | Aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE








51103LB | 3x1W | LED | Aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
51103L/D/15	Aluminium	Daylight	6000K	3x1W	180lm	15°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver
51103L/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver
51103L/W/15	Aluminium	Warm white	3000K	3x1W	135lm	15°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver
51103LW/D/35	White	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver
51103LB/D/35	Black	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver
51103LB/W/35	Black	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	70mm	50mm	60	Requires 350mA driver



The 3x1W Glass Lens Spots



11103N/AL | 3x1W | LED | Natural aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE








11103N/W | 3x1W | LED | Aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE








11103N/B | 3x1W | LED | Aluminium

IP20 ADJUSTABLE DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103N/AL/D/35	Aluminium	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103N/AL/W/35	Aluminium	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103N/W/D/35	White	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103N/B/D/35	Black	Daylight	6000K	3x1W	180lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver
11103N/B/W/35	Black	Warm white	3000K	3x1W	135lm	35°	350mA	III	40cm	70mm	50mm	100	Requires 350mA driver



The 7W COB Range



11107B | 7W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE








11107 | 7W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE








51107 | 7W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107B/W/W	White	Warm white	3000K	7W	560lm	60°	230V	▣	-	75mm	75mm	50	Complete with driver
11107/AL/W	Aluminium	Warm white	3000K	7W	513lm	30°	700mA	III	40cm	70mm	90mm	30	Requires 700mA driver
11107/W/W	White	Warm white	3000K	7W	513lm	30°	700mA	III	40cm	70mm	90mm	30	Requires 700mA driver
51107/AL/W	Aluminium	Warm white	3000K	7W	513lm	30°	700mA	III	40cm	70mm	90mm	30	Requires 700mA driver
51107/W/W	White	Warm white	3000K	7W	513lm	30°	700mA	III	40cm	70mm	90mm	30	Requires 700mA driver



The 12W COB Round Range




11112/AL | 12W | COB LED | Natural aluminium

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE








11112/W | 12W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11112/AL/W	Aluminium	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	78mm	90mm	50	Requires 700mA driver
11112/W/C	White	Cool white	4000K	12W	1100lm	38°	700mA	III	40cm	78mm	90mm	50	Requires 700mA driver
11112/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	78mm	90mm	50	Requires 700mA driver



The 12W COB Square Range

Aluminium




51112/AL | 12W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE








51112/W | 12W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE



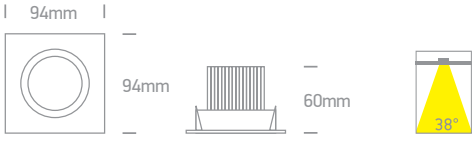

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
51112/AL/W	Aluminium	Warm white	3000K	12W	880lm	38°	700mA	III	40cm	80mm	90mm	50	Requires 700mA driver
51112/W/W	White	Warm white	3000K	12W	880lm	38°	700mA	III	40cm	80mm	90mm	50	Requires 700mA driver



The COB Round Spots

Aluminium



11106A/AL

11106A | 6W | LED | Aluminium

IP20 80 CRI

ADJUSTABLE QUICK FIX CE



11106A/W





11110A/AL

11110A | 10W | LED | Aluminium

IP20 80 CRI

ADJUSTABLE QUICK FIX CE



11110A/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11106A/AL/C	Aluminium	Cool white	4000K	6W	485lm	36°	100-240V	☐	80mm	80mm	20	Complete with driver
11106A/AL/W	Aluminium	Warm white	3000K	6W	475lm	36°	100-240V	☐	80mm	80mm	20	Complete with driver
11106A/W/C	White	Cool white	4000K	6W	485lm	36°	100-240V	☐	80mm	80mm	20	Complete with driver
11106A/W/W	White	Warm white	3000K	6W	475lm	36°	100-240V	☐	80mm	80mm	20	Complete with driver
11110A/AL/C	Aluminium	Cool white	4000K	10W	840lm	36°	100-240V	☐	100mm	100mm	20	Complete with driver
11110A/AL/W	Aluminium	Warm white	3000K	10W	825lm	36°	100-240V	☐	100mm	100mm	20	Complete with driver
11110A/W/C	White	Cool white	4000K	10W	840lm	36°	100-240V	☐	100mm	100mm	20	Complete with driver
11110A/W/W	White	Warm white	3000K	10W	825lm	36°	100-240V	☐	100mm	100mm	20	Complete with driver



The COB Square Spots

Aluminium



51106A/AL


51106A | 6W | LED | Aluminium

IP20 80 CRI

ADJUSTABLE QUICK FIX CE



51106A/W





51110A/AL


51110A | 10W | LED | Aluminium

IP20 80 CRI

ADJUSTABLE QUICK FIX CE



51110A/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51106A/AL/C	Aluminium	Cool white	4000K	6W	485lm	36°	100-240V		80mm	80mm	20	Complete with driver
51106A/AL/W	Aluminium	Warm white	3000K	6W	475lm	36°	100-240V		80mm	80mm	20	Complete with driver
51106A/W/C	White	Cool white	4000K	6W	485lm	36°	100-240V		80mm	80mm	20	Complete with driver
51106A/W/W	White	Warm white	3000K	6W	475lm	36°	100-240V		80mm	80mm	20	Complete with driver
51110A/AL/C	Aluminium	Cool white	4000K	10W	840lm	36°	100-240V		100mm	100mm	20	Complete with driver
51110A/AL/W	Aluminium	Warm white	3000K	10W	825lm	36°	100-240V		100mm	100mm	20	Complete with driver
51110A/W/C	White	Cool white	4000K	10W	840lm	36°	100-240V		100mm	100mm	20	Complete with driver
51110A/W/W	White	Warm white	3000K	10W	825lm	36°	100-240V		100mm	100mm	20	Complete with driver



The COB Round Classic Spots



11107A | 7W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







11112A | 12W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE








11112C | 12W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE







11113L | 13W | COB LED | Die cast

For limited ceiling height.

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE



Slim height.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S				Notes
11107A/W/W	White	Warm white	3000K	7W	420lm	24°	100-240V		-	74mm	80mm	24	Complete with driver
11112A/W/W	White	Warm white	3000K	12W	720lm	24°	230V		-	92mm	100mm	24	Complete with driver
11112C/W/W	White	Warm white	3000K	12W	800lm	38°	350mA		20cm	94mm	95mm	24	Requires 350mA driver
11113L/W/W	White	Warm white	3000K	13W	1100lm	40°	350mA		40cm	90mm	60mm	20	Requires 350mA driver

The Compact Spots



11109KD/W/W



11106K/W + White ring



11106K | 6W | LED | Plastic

IP20 80 CRI

ADJUSTABLE



Complete with White/Black/Grey rings.





11106KD | 6,3W | LED | Plastic

IP20 80 CRI

TRIAC

ADJUSTABLE DIMMABLE



Complete with White/Black/Grey rings.





11109KD | 9,2W | COB LED | Aluminium

IP20 80 CRI

TRIAC

ADJUSTABLE DIMMABLE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11106K/W	White/Black/Grey	Warm white	3000K	6W	345lm	38°	100-240V	□	67mm	90mm	48	Complete with driver
11106KD/W	White/Black/Grey	Warm white	3000K	6,3W	345lm	38°	230V	□	67mm	90mm	48	Complete with dimmable driver
11109KD/W/W	White	Warm white	3000K	9,2W	620lm	38°	230V	□	67mm	90mm	48	Complete with dimmable driver



51112H/W/W + 050088/G

11112H/W/W + 050086A/W

11112H/B/W + 050086/BS

The Interchanging Rings Range

Aluminium



11112H | 12W | COB LED | Aluminium — Ring must be ordered separately.

IP20 · 80 CRI · ADJUSTABLE · CE



11112H/W/W+050086/B



11112H/B/W+050086/BS





050086/W White



050086/B Black



050086/G Grey



050086/BS Dark brass



050086A/W White



51112H | 12W | COB LED | Aluminium — Ring must be ordered separately.

IP20 · 80 CRI · ADJUSTABLE · CE



51112H/W/W+050088/B



51112H/B/W+050088/BS





050088/W White



050088/B Black



050088/G Grey



050088/BS Dark brass



050088A/W White

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11112H/W/W	White	Warm white	3000K	12W	940lm	60°	100-240V	☐	90mm	120mm	30	Complete with driver
11112H/B/W	Black	Warm white	3000K	12W	940lm	60°	100-240V	☐	90mm	120mm	30	Complete with driver
51112H/W/W	White	Warm white	3000K	12W	940lm	60°	100-240V	☐	95x95mm	120mm	30	Complete with driver
51112H/B/W	Black	Warm white	3000K	12W	940lm	60°	100-240V	☐	95x95mm	120mm	30	Complete with driver



The COB Shop & Hotel Range




11107DL/W/W

11107DL | 7W | COB LED | Aluminium

IP20 | 80 CRI | ADJUSTABLE | DIMMABLE | QUICK FIX | DARK LIGHT | CE



11107DL/B/W






11112E | 12W | COB LED | Die cast

IP20 | 80 CRI | ADJUSTABLE | DIMMABLE | QUICK FIX | DARK LIGHT | CE







51112E | 12W | COB LED | Die cast

IP20 | 80 CRI | ADJUSTABLE | DIMMABLE | QUICK FIX | DARK LIGHT | CE







51212E | 2x12W | COB LED | Die cast

IP20 | 80 CRI | ADJUSTABLE | DIMMABLE | QUICK FIX | DARK LIGHT | CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107DL/W/W	White	Warm white	3000K	7W	450lm	38°	700mA	III	40cm	60mm	100mm	50	Requires 700mA driver
11107DL/B/W	Black	Warm white	3000K	7W	450lm	38°	700mA	III	40cm	60mm	100mm	50	Requires 700mA driver
11112E/W/C	White	Cool white	4000K	12W	1100lm	40°	700mA	III	40cm	87mm	95mm	50	Requires 700mA driver
11112E/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	87mm	95mm	50	Requires 700mA driver
11112E/W/EW	White	Extra warm white	2700K	12W	1100lm	40°	700mA	III	40cm	87mm	95mm	50	Requires 700mA driver
51112E/W/C	White	Cool white	4000K	12W	1100lm	40°	700mA	III	40cm	90x90mm	95mm	50	Requires 700mA driver
51112E/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	90x90mm	95mm	50	Requires 700mA driver
51112E/W/EW	White	Extra warm white	2700K	12W	1100lm	40°	700mA	III	40cm	90x90mm	95mm	50	Requires 700mA driver
51212E/W/C	White	Cool white	4000K	2x12W	2x1100lm	40°	700mA	III	40cm	175x90mm	95mm	24	Requires 700mA drivers
51212E/W/W	White	Warm white	3000K	2x12W	2x1100lm	40°	700mA	III	40cm	175x90mm	95mm	24	Requires 700mA drivers





11103D/W | 3x1W | LED | Semi trimless | Aluminium

IP20 ADJUSTABLE
DIMMABLE QUICK FIX DARK LIGHT CE







11103D/G | 3x1W | LED | Semi trimless | Aluminium

IP20 ADJUSTABLE
DIMMABLE QUICK FIX DARK LIGHT CE








11112D | 12W | COB LED | Aluminium

IP20 80 CRI ADJUSTABLE
DIMMABLE QUICK FIX DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103D/W/C	White	Cool white	4000K	3x1W	160lm	45°	350mA	III	40cm	90mm	90mm	50	Requires 350mA driver
11103D/G/C	Grey	Cool white	4000K	3x1W	160lm	45°	350mA	III	40cm	90mm	90mm	50	Requires 350mA driver
11103D/G/W	Grey	Warm white	3000K	3x1W	135lm	45°	350mA	III	40cm	90mm	90mm	50	Requires 350mA driver
11112D/W/W	White	Warm white	3000K	12W	650lm	38°	700mA	III	40cm	79mm	110mm	24	Requires 700mA driver



51112TA/W/W

11112TA/W/W

The 12W COB Dark Light

Die cast




11112TA | 12W | COB LED | Die cast

IP20 80 CRI ADJUSTABLE

DIMMABLE QUICK FIX DARK LIGHT CE








51112TA | 12W | COB LED | Die cast

IP20 80 CRI ADJUSTABLE

DIMMABLE QUICK FIX DARK LIGHT CE



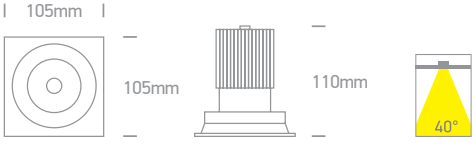

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11112TA/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	90mm	125mm	50	Requires 700mA driver
51112TA/W/W	White	Warm white	3000K	12W	1100lm	40°	700mA	III	40cm	90mm	125mm	50	Requires 700mA driver



11103BD/W/W

11107DA/W/W

11107FD/W/C

The COB Dark Light Range




11103BD | 3W | COB LED | Aluminium

IP20 90 CRI ADJUSTABLE

DIMMABLE QUICK FIX DARK LIGHT CE







11107DA | 7W | COB LED | Aluminium

IP20 80 CRI ADJUSTABLE

DARK LIGHT CE



11107DA/B/W





11107FD | 7W | COB LED | Die cast

IP20 80 CRI ADJUSTABLE

DARK LIGHT CE



11107FD/B/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103BD/W/W	White	Warm white	3000K	3W	220lm	36°	350mA		40cm	44mm	50mm	100	Requires 350mA driver
11107DA/W/W	White	Warm white	3000K	7W	600lm	36°	230V		-	70mm	80mm	50	Complete with driver
11107DA/B/W	Black	Warm white	3000K	7W	600lm	36°	230V		-	70mm	80mm	50	Complete with driver
11107FD/W/C	White	Cool white	4000K	7W	560lm	60°	230V		-	80mm	110mm	50	Complete with driver
11107FD/W/W	White	Warm white	3000K	7W	560lm	60°	230V		-	80mm	110mm	50	Complete with driver
11107FD/W/EW	White	Extra warm white	2700K	7W	560lm	60°	230V		-	80mm	110mm	50	Complete with driver
11107FD/B/W	Black	Warm white	3000K	7W	560lm	60°	230V		-	80mm	110mm	50	Complete with driver





11103P | 3W | COB LED | Aluminium

IP44 80 CRI ADJUSTABLE
DIMMABLE QUICK FIX CE








11107WD | 7W | COB LED | Aluminium

IP54 90 CRI ADJUSTABLE
DIMMABLE QUICK FIX DARK LIGHT CE







11207WD | 2x7W | COB LED | Aluminium

IP54 90 CRI ADJUSTABLE
DIMMABLE QUICK FIX DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11103P/W/W	White	Warm white	3000K	3W	240lm	36°	350mA	III	40cm	47mm	60mm	100	Requires 350mA driver
11107WD/W/W	White	Warm white	3000K	7W	500lm	36°	700mA	III	40cm	83mm	100mm	36	Requires 700mA driver
11207WD/W/W	White	Warm white	3000K	2x7W	2x500lm	36°	700mA	III	40cm	160x83mm	100mm	16	Requires 700mA drivers





11107P | 7W | COB LED | Die cast

IP54 90 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE








11107D | 7W | COB LED | Die cast

IP54 90 CRI ADJUSTABLE

DIMMABLE QUICK FIX DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107P/W/W	White	Warm white	3000K	7W	530lm	36°	700mA	III	40cm	70mm	70mm	60	Requires 700mA driver
11107D/W/W	White	Warm white	3000K	7W	500lm	36°	700mA	III	40cm	92mm	90mm	30	Requires 700mA driver



11107P/W/W

11107H/W/C

11107D/W/W

The 7W Dark Light Shop Range

Aluminium




11107H | 7W | COB LED | Aluminium

IP44 80 CRI ADJUSTABLE

DIMMABLE QUICK FIX DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107H/W/C	White	Cool white	4000K	7W	350lm	36°	700mA	III	40cm	80mm	90mm	50	Requires 700mA driver
11107H/W/W	White	Warm white	3000K	7W	350lm	36°	700mA	III	40cm	80mm	90mm	50	Requires 700mA driver



11110C/W/W

51110C/W/W

Moving Inner Cylinder Range

Die cast




11110C | 10W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE DARK LIGHT CE








51110C | 10W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11110C/W/W	White	Warm white	3000K	10W	650lm	24°	230V	□	40cm	85mm	120mm	36	Complete with driver
51110C/W/W	White	Warm white	3000K	10W	650lm	24°	230V	□	40cm	85x85mm	120mm	36	Complete with driver



11113M/W/W



11108M/W/W

Moving Inner Cylinder Range

Die cast




11108M | 7W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE








11113M | 13W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11108M/W/W	White	Warm white	3000K	7W	635lm	40°	700mA	III	40cm	95mm	100mm	30	Requires 700mA driver
11113M/W/W	White	Warm white	3000K	13W	1200lm	40°	350mA	III	40cm	125mm	120mm	12	Requires 350mA driver



11107F/W/W



11107M/W/W

The COB Pop Up Range




11107F | 7W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE



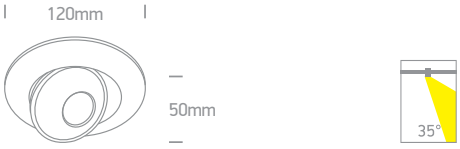




11109E | 9W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







11107M | 7W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE







11207M | 2x7W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107F/W/W	White	Warm white	3000K	7W	560lm	35°	700mA		40cm	95mm	50mm	30	Requires 700mA driver
11109E/W/W	White	Warm white	3000K	9W	765lm	40°	230V		-	112mm	70mm	30	Complete with driver
11107M/W/W	White	Warm white	3000K	7W	464lm	35°	700mA		40cm	95mm	50mm	30	Requires 700mA driver
11207M/W/W	White	Warm white	3000K	2x7W	2x464lm	35°	700mA		40cm	2x100mm	50mm	20	Requires 700mA drivers






11107C | 7W | COB LED | Die cast

IP20 90 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE










11106B | 6,5W | COB LED | Die cast

IP40 80 CRI

ADJUSTABLE CE










11109LA | 9W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107C/W/W	White	Warm white	3000K	7W	520lm	36°	700mA		40cm	83mm	80mm	36	Requires 700mA driver
11106B/W/W	White	Warm white	3000K	6,5W	650lm	36°	230V		-	90mm	70mm	50	Complete with driver
11109LA/W/W	White	Warm white	3000K	9W	700lm	25°	230V		-	90mm	60mm	24	Complete with driver

The COB Fire Rated Range



11106PF/C



050044/MC



050044/B



050044/C



050044/W



11106PF | 6W | COB LED | Fire rated | Die cast

Ring must be ordered separately.

IP20 | 80 CRI | FIRE RATED | ADJUSTABLE | DIMMABLE | QUICK FIX | CE



Dimensions are complete with the ring.






050044 | Adjustable round rings for 11106PF

ADJUSTABLE | CE

050044/W White
050044/B Black
050044/MC Brushed chrome
050044/C Chrome

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11106PF/C	-	Cool white	4000K	6W	530lm	40°	350mA	III	40cm	75mm	90mm	20	Requires 350mA driver
11106PF/W	-	Warm white	3000K	6W	500lm	40°	350mA	III	40cm	75mm	90mm	20	Requires 350mA driver

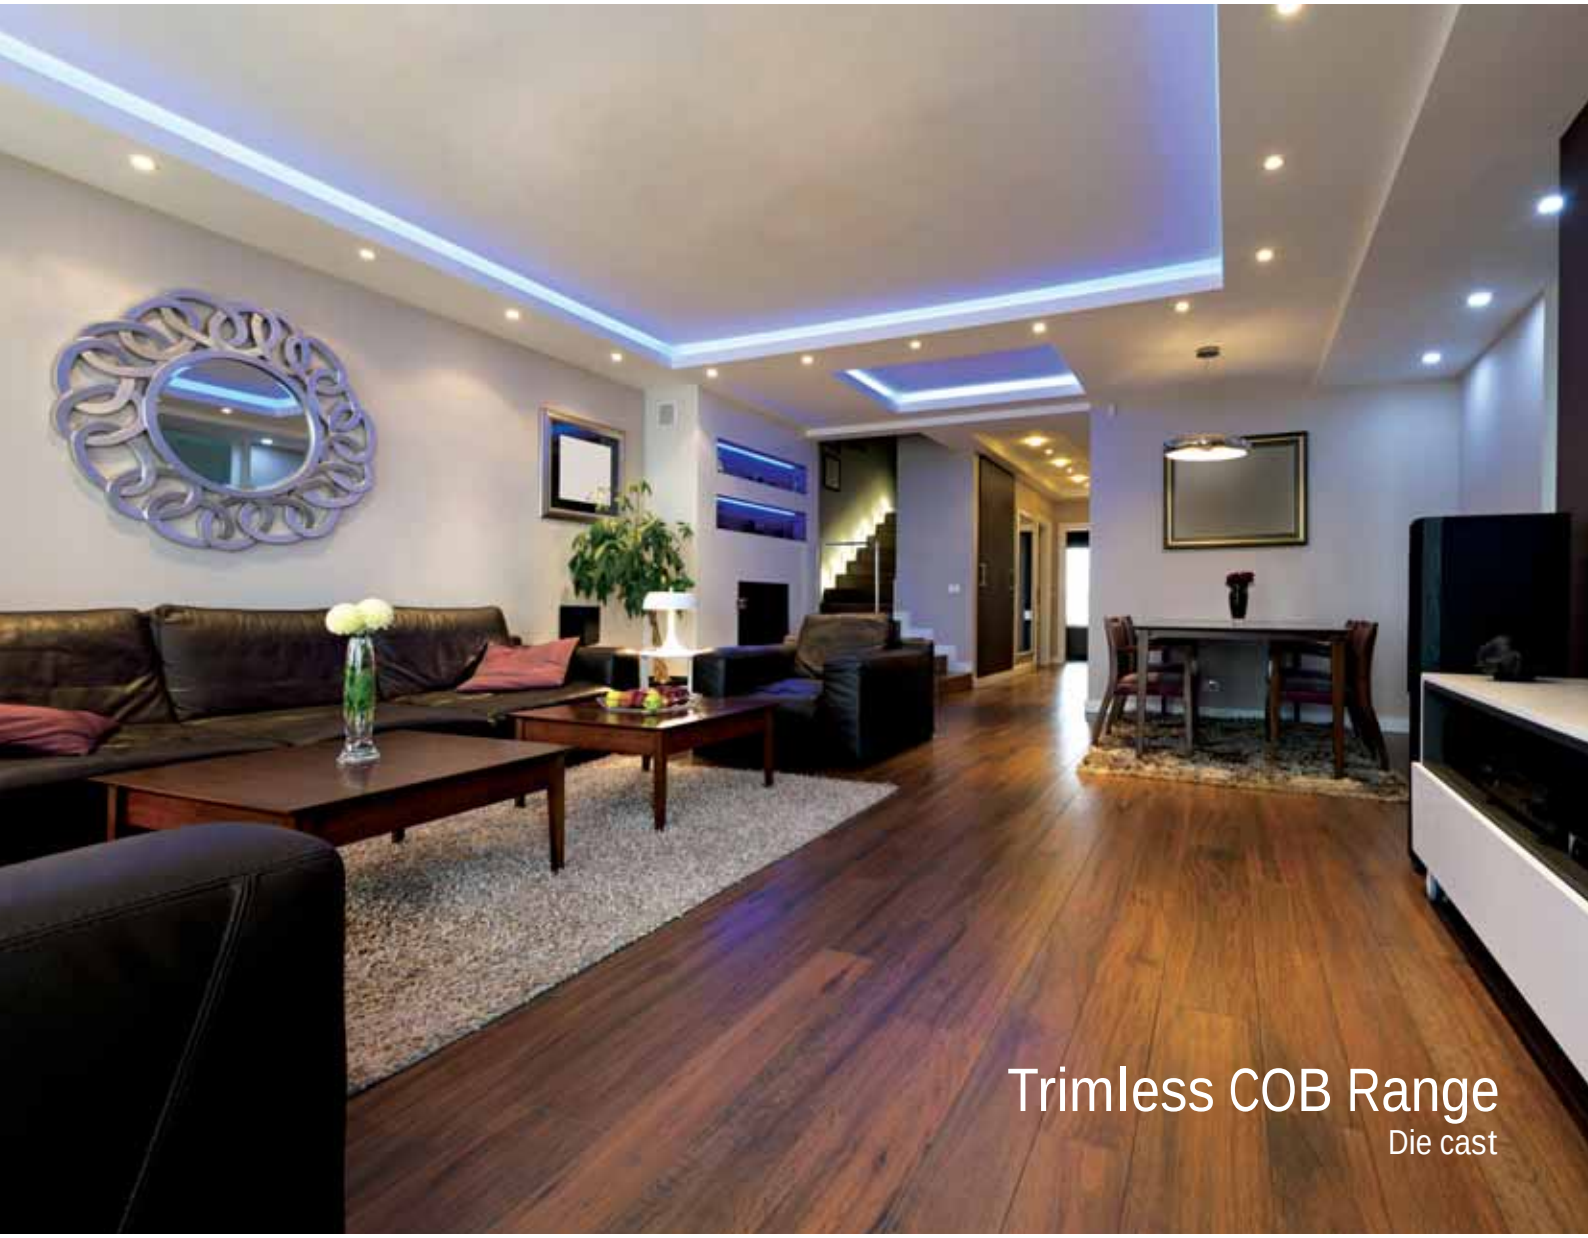


Trimless COB Range
Die cast



11107BT | 7W | COB LED | Trimless | Die cast

IP54 80 CRI ADJUSTABLE
DIMMABLE QUICK FIX DARK LIGHT CE








11112T | 12W | COB LED | Trimless | Die cast

IP20 80 CRI ADJUSTABLE
DIMMABLE QUICK FIX DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107BT/W/W	White	Warm white	3000K	7W	500lm	38°	700mA	III	40cm	96mm	95mm	30	Requires 700mA driver
11112T/W/W	White	Warm white	3000K	12W	1100lm	38°	700mA	III	40cm	85mm	100mm	40	Requires 700mA driver





05

Downlights Fixed

Pages 107-118

GX53 | E27 | HQI | Rx7s | G12 | G24q3 | G24q4

Die cast | Natural aluminium | Steel | Metal | Gypsum | Trimless

IP20

DARK LIGHT

QUICK FIX







10007/MC

10007 | 9W | GX53 | Steel

IP20

CE



10007/W





10004 | 9W | GX53 | Natural aluminium

IP20

CE



Order Code	Colour	Watts	Input	Class				Notes
10007/W	White	9W	100-240V		110mm	60mm	50	-
10007/MC	Brushed chrome	9W	100-240V		110mm	60mm	50	-
10004/AL	Aluminium	9W	100-240V		86mm	35mm	50	-





E27 Budget Downlights
Metal



10115BF | 15W | E27 | Metal

IP20

CE





10220BF/W

10220BF | 2x20W | E27 | Metal

IP20

CE



10220BF/MC





50115BF/W


50115BF | 15W | E27 | Metal

IP20

CE



50115BF/MC





50220BF/W


50220BF | 2x20W | E27 | Metal

IP20

CE



50220BF/MC



Order Code	Colour	Watts	Input	Class				Notes
10115BF/MC	Brushed chrome	15W	100-240V		130mm	150mm	12	Use CFL or LED lamp
10220BF/W	White	2x20W	100-240V		210mm	150mm	12	Use CFL or LED lamps
10220BF/MC	Brushed chrome	2x20W	100-240V		210mm	150mm	12	Use CFL or LED lamps
50115BF/W	White	15W	100-240V		110x110mm	110mm	16	Use CFL or LED lamp
50115BF/MC	Brushed chrome	15W	100-240V		110x110mm	110mm	16	Use CFL or LED lamp
50220BF/W	White	2x20W	100-240V		195x195mm	140mm	8	Use CFL or LED lamps
50220BF/MC	Brushed chrome	2x20W	100-240V		195x195mm	140mm	8	Use CFL or LED lamps


10115BF/MC


10220CF/MC


10215D/MC


10220E/MC


50220BF/MC

E27 Budget Downlights

Metal



10215D | 2x15W | E27 | Metal

IP20

CE




10220D/W

10220D | 2x20W | E27 | Metal

IP20

CE


10220D/MC





10220E | 2x20W | E27 | Metal

IP20

CE


Suitable for 9G12B LED lamps.





10220CF/W

10220CF | 2x20W | E27 | Metal

IP20

CE


10220CF/MC



Order Code	Colour	Watts	Input	Class				Notes
10215D/MC	Brushed chrome	2x15W	100-240V		175mm	150mm	18	Use CFL or LED lamps
10220D/W	White	2x20W	100-240V		210mm	150mm	12	Use CFL or LED lamps
10220D/MC	Brushed chrome	2x20W	100-240V		210mm	150mm	12	Use CFL or LED lamps
10220E/W	White	2x20W	100-240V		210mm	110mm	12	Use CFL or LED lamps
10220CF/W	White	2x20W	100-240V		210mm	150mm	12	Use CFL or LED lamps
10220CF/MC	Brushed chrome	2x20W	100-240V		210mm	150mm	12	Use CFL or LED lamps



E27 Trimless Downlights

Die cast



10220T | 2x20W | E27 | Trimless | Die cast

IP20

CE







50220T | 2x20W | E27 | Trimless | Die cast

IP20

CE





Order Code	Colour	Watts	Input	Class				Notes
10220T	White	2x20W	100-240V	⏚	203mm	140mm	12	Use CFL or LED lamps
50220T	White	2x20W	100-240V	⏚	190x190mm	140mm	12	Use CFL or LED lamps

E27 Trimless Downlights

Gypsum



50220GT1



10220GT1



10220GT1 | 2x20W | E27 | Gypsum

IP20

CE









50220GT1 | 2x20W | E27 | Gypsum

IP20

CE







Order Code	Colour	Watts	Input	Class				Notes
10220GT1	White	2x20W	100-240V		262mm	180mm	4	Use CFL or LED lamps
50220GT1	White	2x20W	100-240V		242x242mm	180mm	4	Use CFL or LED lamps



Light Tunnel
Die cast




50126AF/W/ELE | 26W | G24q3 | Die cast

IP20 DARK LIGHT

QUICK FIX CE

Dimmable version.





Use ballast 89142/ELE/DIM.




50126AF/MC/ELE | 26W | G24q3 | Die cast

IP20 DARK LIGHT

QUICK FIX CE

Dimmable version.



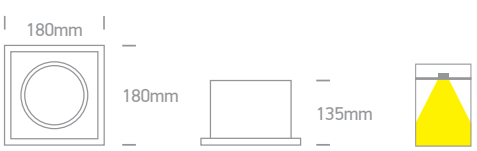

Use ballast 89142/ELE/DIM.

Order Code	Colour	Watts	Input	Class					Notes
50126AF/W/ELE	White	26W	230V		30cm	167x167mm	190mm	8	Requires ballast 89142/ELE
50126AF/MC/ELE	Brushed chrome	26W	230V		30cm	167x167mm	190mm	8	Requires ballast 89142/ELE



50242AF/W/ELE



50142AF/MC/ELE

Light Tunnel

Die cast



50142AF | 32W / 42W | G24q4 | Die cast


IP20 DARK LIGHT

QUICK FIX CE

Dimmable version.



Use ballast 89142/ELE/DIM.





50242AF | 2x32W / 42W | G24q4 | Die cast


IP20 DARK LIGHT

QUICK FIX CE

Dimmable version.



Use ballast 89142/ELE/DIM x2.





50342AF | 3x32W / 42W | G24q4 | Die cast


IP20 DARK LIGHT

QUICK FIX CE

Dimmable version.



Use ballast 89142/ELE/DIM x3.



Order Code	Colour	Watts	Input	Class					Notes
50142AF/W/ELE	White	32W / 42W	230V		30cm	218x218mm	200mm	6	Requires ballast 89142/ELE
50142AF/G/ELE	Grey	32W /42W	230V		30cm	218x218mm	200mm	6	Requires ballast 89142/ELE
50142AF/MC/ELE	Brushed chrome	32W / 42W	230V		30cm	218x218mm	200mm	6	Requires ballast 89142/ELE
50242AF/W/ELE	White	2x32W / 42W	230V		30cm	218x395mm	200mm	3	Requires ballast 89142/ELE x2
50242AF/MC/ELE	Brushed chrome	2x32W / 42W	230V		30cm	218x395mm	200mm	3	Requires ballast 89142/ELE x2
50342AF/W/ELE	White	3x32W / 42W	230V		30cm	218x572mm	200mm	2	Requires ballast 89142/ELE x3
50342AF/G/ELE	Grey	3x32W / 42W	230V		30cm	218x572mm	200mm	2	Requires ballast 89142/ELE x3



10150/W/1



10070/G/1

Rx7s Downlights

Die cast



10070/W/1

10070 | 70W | HQI | Rx7s | Die cast

IP20 QUICK FIX

CE



Suitable for 7610L
LED lamp (Direct 230V).





10070/G/1



10070/MC/1



10070/C/1



10070/BBS/1



10150/W/1

10150 | 150W | HQI | Rx7s | Die cast

IP20 QUICK FIX

CE



Suitable for 7612L
LED lamp (Direct 230V).





10150/G/1



10150/MC/1



10150/BBS/1

Order Code	Colour	Watts	Input	Class					Notes
10070/W/1	White	70W	230V		30cm	148mm	80mm	12	Requires ballast 89070/ELE
10070/G/1	Grey	70W	230V		30cm	148mm	80mm	12	Requires ballast 89070/ELE
10070/MC/1	Brushed chrome	70W	230V		30cm	148mm	80mm	12	Requires ballast 89070/ELE
10070/C/1	Chrome	70W	230V		30cm	148mm	80mm	12	Requires ballast 89070/ELE
10070/BBS/1	Brushed brass	70W	230V		30cm	148mm	80mm	12	Requires ballast 89070/ELE
10150/W/1	White	150W	230V		30cm	210mm	100mm	8	Requires ballast 89150/ELE
10150/G/1	Grey	150W	230V		30cm	210mm	100mm	8	Requires ballast 89150/ELE
10150/MC/1	Brushed chrome	150W	230V		30cm	210mm	100mm	8	Requires ballast 89150/ELE
10150/BBS/1	Brushed brass	150W	230V		30cm	210mm	100mm	8	Requires ballast 89150/ELE

Rx7s Downlights



10070B | 70W | HQI | Rx7s | Die cast

IP20 QUICK FIX



Suitable for 7610L
LED lamp (Direct 230V).





10150B | 150W | HQI | Rx7s | Die cast

IP20 QUICK FIX



Suitable for 7612L
LED lamp (Direct 230V).






50070B | 70W | HQI | Rx7s | Die cast

IP20 QUICK FIX



Suitable for 7610L
LED lamp (Direct 230V).






50150B | 150W | HQI | Rx7s | Die cast

IP20 QUICK FIX



Suitable for 7612L
LED lamp (Direct 230V).






50150 | 150W | HQI | Rx7s | Die cast

IP20 QUICK FIX



Suitable for 7612L
LED lamp (Direct 230V).



Order Code	Colour	Watts	Input	Class					Notes
10070B/W/1	White	70W	230V		30cm	175mm	125mm	16	Requires ballast 89070/ELE
10070B/G/1	Grey	70W	230V		30cm	175mm	125mm	16	Requires ballast 89070/ELE
10070B/MC/1	Brushed chrome	70W	230V		30cm	175mm	125mm	16	Requires ballast 89070/ELE
10150B/W/1	White	150W	230V		30cm	215mm	155mm	12	Requires ballast 89150/ELE
10150B/G/1	Grey	150W	230V		30cm	215mm	155mm	12	Requires ballast 89150/ELE
10150B/MC/1	Brushed chrome	150W	230V		30cm	215mm	155mm	12	Requires ballast 89150/ELE
50070B/W/1	White	70W	230V		30cm	175x175mm	190mm	12	Requires ballast 89070/ELE
50070B/MC/1	Brushed chrome	70W	230V		30cm	175x175mm	190mm	12	Requires ballast 89070/ELE
50150B/W/1	White	150W	230V		30cm	215x215mm	155mm	12	Requires ballast 89150/ELE
50150B/G/1	Grey	150W	230V		30cm	215x215mm	155mm	12	Requires ballast 89150/ELE
50150B/MC/1	Brushed chrome	150W	230V		30cm	215x215mm	155mm	12	Requires ballast 89150/ELE
50150/W/1	White	150W	230V		30cm	210x210mm	120mm	8	Requires ballast 89150/ELE
50150/G/1	Grey	150W	230V		30cm	210x210mm	120mm	8	Requires ballast 89150/ELE
50150/MC/1	Brushed chrome	150W	230V		30cm	210x210mm	120mm	8	Requires ballast 89150/ELE



HQI G12 Downlights

Die cast



10070W | 70W | HQI | G12 | Die cast

IP20 DARK LIGHT

QUICK FIX CE



Suitable for 8010L LED lamp (Direct 230V).






10107V | 70W | HQI | G12 | Die cast

IP65 QUICK FIX

CE





Order Code	Colour	Watts	Input	Class	Beam Angle					Notes
10070W/W	White	70W	230V	⏚	-	30cm	148mm	200mm	12	Requires ballast 89070/ELE
10070W/G	Grey	70W	230V	⏚	-	30cm	148mm	200mm	12	Requires ballast 89070/ELE
10107V/B	Black	70W	230V	⏚	38°	100cm	123mm	200mm	18	Requires ballast 89070/ELE
10107V/G	Grey	70W	230V	⏚	38°	100cm	123mm	200mm	18	Requires ballast 89070/ELE



HQI Dark Lights

Die cast



10020E/MC/60


10020E | 35W | HQI | G8,5 | Die cast

IP20 DARK LIGHT

QUICK FIX CE



10020E/W/60





10035E/G/60


10035E | 70W | HQI | G8,5 | Die cast

IP20 DARK LIGHT

QUICK FIX CE



10035E/W/60






10070E | 70W | HQI | G12 | Die cast

IP20 DARK LIGHT

QUICK FIX CE



Suitable for 8010L LED lamp (Direct 230V).






10150E | 150W | HQI | G12 | Die cast

IP20 DARK LIGHT

QUICK FIX CE



Suitable for 8010L LED lamp (Direct 230V).

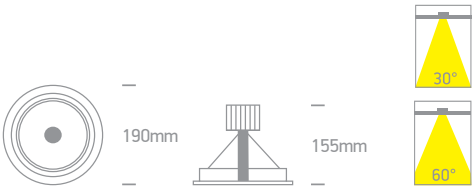

Order Code	Watts	Input	Class	Beam Angle					Notes
10020E	35W	230V		60º	30cm	75mm	140mm	20	Requires ballast 89020/ELE
Available colours: **10020E/W/60** White **10020E/MC/60** Brushed chrome									
10035E	70W	230V		60º	30cm	115mm	170mm	30	Requires 35W HQI ballast
Available colours: **10035E/W/60** White **10035E/G/60** Grey **10035E/MC/60** Brushed chrome									
10070E	70W	230V		60º	30cm	148mm	175mm	24	Requires ballast 89070/ELE
Available colours: **10070E/W/60** White **10070E/G/60** Grey **10070E/MC/60** Brushed chrome									
10150E/../30	150W	230V		30º	30cm	180mm	175mm	18	Requires ballast 89150/ELE
Available colours: **10150E/W/30** White **10150E/G/30** Grey **10150E/MC/30** Brushed chrome									
10150E/../60	150W	230V		60º	30cm	180mm	175mm	18	Requires ballast 89150/ELE
Available colours: **10150E/W/60** White **10150E/G/60** Grey **10150E/MC/60** Brushed chrome									





06

Downlights Fixed LED

Pages 121-156

COB LED | SMD LED | LED

Die cast | Aluminium

IP20 IP40 IP44 IP54 IP65

DIMMABLE DARK LIGHT QUICK FIX UGR19 80 CRI 90 CRI





10112F/G/D

10108F/G/D



10120F/G/W

Round Recessed Panels


Die cast




10108F | 8W | SMD LED | Die cast

IP40 80 CRI

CE









10112F | 12W | SMD LED | Die cast

IP40 80 CRI

CE








10120F | 30W | SMD LED | Die cast

Optional dimmable driver code 040060.

IP40 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10108F/G/D	Grey	Daylight	6000K	8W	537lm	120°	100-240V		108mm	40mm	40	Complete with driver
10108F/G/W	Grey	Warm white	3000K	8W	483lm	120°	100-240V		108mm	40mm	40	Complete with driver
10112F/W/D	White	Daylight	6000K	12W	827lm	120°	100-240V		165mm	40mm	20	Complete with driver
10112F/W/EW	White	Extra warm white	2700K	12W	745lm	120°	100-240V		165mm	40mm	20	Complete with driver
10112F/G/D	Grey	Daylight	6000K	12W	827lm	120°	100-240V		165mm	40mm	20	Complete with driver
10120F/W/D	White	Daylight	6000K	30W	1997lm	120°	100-240V		285mm	40mm	10	Complete with driver
10120F/G/D	Grey	Daylight	6000K	30W	1997lm	120°	100-240V		285mm	40mm	10	Complete with driver
10120F/G/W	Grey	Warm white	3000K	30W	1797lm	120°	100-240V		285mm	40mm	10	Complete with driver



10103FA/W/D


Round Recessed Panels 3-12W

Die cast



10103FA | 3W | SMD LED | Die cast

IP40 80 CRI








10108FA | 8W | SMD LED | Die cast

Optional dimmable driver code 040008FD.

IP40 80 CRI








10112FA | 12W | SMD LED | Die cast

Optional dimmable driver code 040012FD.

IP40 80 CRI





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103FA/W/D	White	Daylight	6000K	3W	210lm	120°	230V		70mm	50mm	60	Complete with driver
10103FA/W/C	White	Cool white	4000K	3W	210lm	120°	230V		70mm	50mm	60	Complete with driver
10103FA/W/W	White	Warm white	3000K	3W	180lm	120°	230V		70mm	50mm	60	Complete with driver
10103FA/G/W	Grey	Warm white	3000K	3W	180lm	120°	230V		70mm	50mm	60	Complete with driver
10108FA/W/D	White	Daylight	6000K	8W	560lm	120°	230V		108mm	50mm	40	Complete with driver
10108FA/W/C	White	Cool white	4000K	8W	560lm	120°	230V		108mm	50mm	40	Complete with driver
10108FA/W/W	White	Warm white	3000K	8W	480lm	120°	230V		108mm	50mm	40	Complete with driver
10108FA/B/C	Black	Cool white	3000K	8W	480lm	120°	230V		108mm	50mm	40	Complete with driver
10108FA/B/W	Black	Warm white	4000K	8W	560lm	120°	230V		108mm	50mm	40	Complete with driver
10108FA/G/W	Grey	Warm white	3000K	8W	480lm	120°	230V		108mm	50mm	40	Complete with driver
10112FA/W/C	White	Cool white	4000K	12W	840lm	120°	230V		155mm	50mm	30	Complete with driver
10112FA/W/W	White	Warm white	3000K	12W	720lm	120°	230V		155mm	50mm	30	Complete with driver
10112FA/B/C	Black	Cool white	4000K	12W	840lm	120°	230V		155mm	50mm	30	Complete with driver
10112FA/B/W	Black	Warm white	3000K	12W	720lm	120°	230V		155mm	50mm	30	Complete with driver
10112FA/G/C	Grey	Cool white	4000K	12W	840lm	120°	230V		155mm	50mm	30	Complete with driver
10112FA/G/W	Grey	Warm white	3000K	12W	720lm	120°	230V		155mm	50mm	30	Complete with driver



Round Recessed Panels 18-40W

Die cast




10118FA | 18W | SMD LED | Die cast

Optional dimmable driver code 040018FD.

IP40 80 CRI

CE







10130FA | 30W | SMD LED | Die cast

Optional dimmable driver code 040030FD.

IP40 80 CRI

CE







10140F | 40W | SMD LED | Die cast

IP40 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10118FA/W/D	White	Daylight	6000K	18W	1260lm	120°	230V	☐	210mm	50mm	20	Complete with driver
10118FA/W/C	White	Cool white	4000K	18W	1260lm	120°	230V	☐	210mm	50mm	20	Complete with driver
10118FA/W/W	White	Warm white	3000K	18W	1080lm	120°	230V	☐	210mm	50mm	20	Complete with driver
10118FA/B/C	Black	Cool white	4000K	18W	1260lm	120°	230V	☐	210mm	50mm	20	Complete with driver
10118FA/B/W	Black	Warm white	3000K	18W	1080lm	120°	230V	☐	210mm	50mm	20	Complete with driver
10118FA/G/D	Grey	Daylight	6000K	18W	1260lm	120°	230V	☐	210mm	50mm	20	Complete with driver
10118FA/G/C	Grey	Cool white	4000K	18W	1260lm	120°	230V	☐	210mm	50mm	20	Complete with driver
10118FA/G/W	Grey	Warm white	3000K	18W	1080lm	120°	230V	☐	210mm	50mm	20	Complete with driver
10130FA/W/D	White	Daylight	6000K	30W	2100lm	120°	230V	☐	285mm	50mm	15	Complete with driver
10130FA/W/C	White	Cool white	4000K	30W	2100lm	120°	230V	☐	285mm	50mm	15	Complete with driver
10130FA/W/W	White	Warm white	3000K	30W	1800lm	120°	230V	☐	285mm	50mm	15	Complete with driver
10130FA/G/C	Grey	Cool white	4000K	30W	2100lm	120°	230V	☐	285mm	50mm	15	Complete with driver
10140F/W/D	White	Daylight	6000K	40W	2800lm	120°	230V	☐	408mm	40mm	5	Complete with driver
10140F/W/C	White	Cool white	4000K	40W	2800lm	120°	230V	☐	408mm	40mm	5	Complete with driver
10140F/W/W	White	Warm white	3000K	40W	2520lm	120°	230V	☐	408mm	40mm	5	Complete with driver



Round Recessed Panel 48W

Die cast



10148PE | 48W | SMD 2835 | 600mm | Die cast

Driver must be ordered separately.

IP20 80 CRI

DIMMABLE





Optional non-dimmable driver. Order code 89048.



Optional TRIAC dimmable driver. Order code 89048T.



Optional DALI & Push to DIM driver. Order code 89050L.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10148PE/W/C	White	Cool white	4000K	48W	4000lm	120°	1200mA	III	585mm	80mm	4	Requires 1200mA driver
10148PE/W/W	White	Warm white	3000K	48W	3500lm	120°	1200mA	III	585mm	80mm	4	Requires 1200mA driver



Square Recessed Panels


Die cast



50108F | 8W | SMD LED | Die cast

IP40 80 CRI

super slim!






50116F | 16W | SMD LED | Die cast

IP40 80 CRI

super slim!



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50108F/W/D	White	Daylight	6000K	8W	461lm	120°	100-240V	☐	96x96mm	40mm	40	Complete with driver
50108F/G/D	Grey	Daylight	6000K	8W	461lm	120°	100-240V	☐	96x96mm	40mm	40	Complete with driver
50116F/G/D	Grey	Daylight	6000K	16W	982lm	120°	100-240V	☐	152x152mm	40mm	20	Complete with driver
50116F/G/C	Grey	Cool white	4000K	16W	982lm	120°	100-240V	☐	152x152mm	40mm	20	Complete with driver

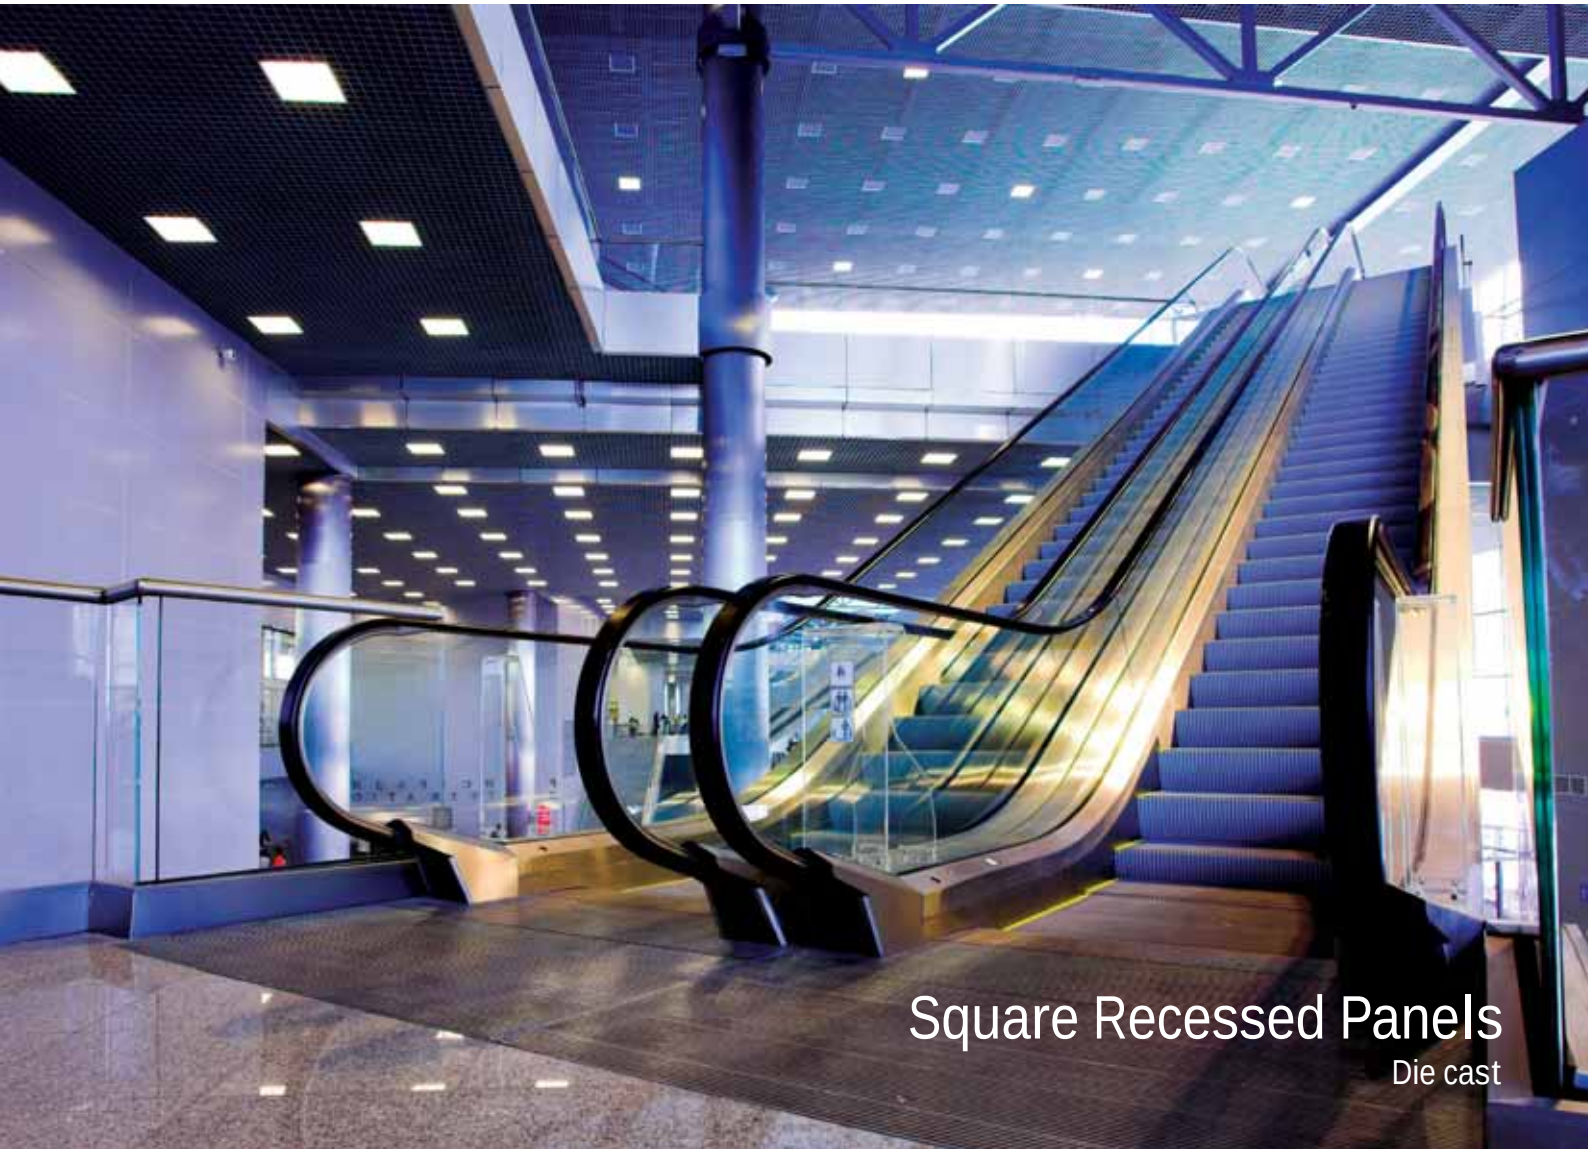

Square Recessed Panels


Die cast




50122F | 22W | SMD LED | Die cast

IP40 80 CRI

CE









50130F | 30W | SMD LED | Die cast

Optional dimmable driver code 040060.

IP40 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50122F/G/D	Grey	Daylight	6000K	22W	1656lm	120°	100-240V	☐	204x204mm	40mm	10	Complete with driver
50122F/G/W	Grey	Warm white	3000K	22W	1490lm	120°	100-240V	☐	204x204mm	40mm	10	Complete with driver
50130F/G/D	Grey	Daylight	6000K	30W	2174lm	120°	100-240V	☐	284x284mm	40mm	10	Complete with driver
50130F/G/C	Grey	Cool white	4000K	30W	2174lm	120°	100-240V	☐	284x284mm	40mm	10	Complete with driver

Square Recessed Panels

Die cast



50116FA/W/D

50108FA/W/D



50122FA/W/D





50108FA | 8W | SMD LED | Die cast

Optional dimmable driver code 040008FD.

IP40 80 CRI

CE









50116FA | 16W | SMD LED | Die cast

Optional dimmable driver code 040016FD.

IP40 80 CRI

CE









50122FA | 22W | SMD LED | Die cast

Optional dimmable driver code 040022FD.

IP40 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50108FA/W/D	White	Daylight	6000K	8W	560lm	120°	230V	☐	105x105mm	50mm	40	Complete with driver
50108FA/W/C	White	Cool white	4000K	8W	560lm	120°	230V	☐	105x105mm	50mm	40	Complete with driver
50108FA/W/W	White	Warm white	3000K	8W	480lm	120°	230V	☐	105x105mm	50mm	40	Complete with driver
50108FA/G/C	Grey	Cool white	4000K	8W	560lm	120°	230V	☐	105x105mm	50mm	40	Complete with driver
50108FA/G/W	Grey	Warm white	3000K	8W	480lm	120°	230V	☐	105x105mm	50mm	40	Complete with driver
50116FA/W/D	White	Daylight	6000K	16W	1120lm	120°	230V	☐	155x155mm	50mm	30	Complete with driver
50116FA/W/C	White	Cool white	4000K	16W	1120lm	120°	230V	☐	155x155mm	50mm	30	Complete with driver
50116FA/W/W	White	Warm white	3000K	16W	960lm	120°	230V	☐	155x155mm	50mm	30	Complete with driver
50116FA/G/C	Grey	Cool white	4000K	16W	1120lm	120°	230V	☐	155x155mm	50mm	30	Complete with driver
50116FA/G/W	Grey	Warm white	3000K	16W	960lm	120°	230V	☐	155x155mm	50mm	30	Complete with driver
50122FA/W/D	White	Daylight	6000K	22W	1540lm	120°	230V	☐	210x210mm	50mm	20	Complete with driver
50122FA/W/C	White	Cool white	4000K	22W	1540lm	120°	230V	☐	210x210mm	50mm	20	Complete with driver
50122FA/W/W	White	Warm white	3000K	22W	1320lm	120°	230V	☐	210x210mm	50mm	20	Complete with driver
50122FA/G/C	Grey	Cool white	4000K	22W	1540lm	120°	230V	☐	210x210mm	50mm	20	Complete with driver
50122FA/G/W	Grey	Warm white	3000K	22W	1320lm	120°	230V	☐	210x210mm	50mm	20	Complete with driver



Square Recessed Panels

Die cast





50130FA | 30W | SMD LED | Die cast

Optional dimmable driver code 040030FD.

IP40 80 CRI

CE







50148PE | 48W | SMD 2835 | 600x600mm | Die cast

Driver must be ordered separately.

IP20 80 CRI

DIMMABLE CE





Optional non-dimmable driver. Order code 89048.



Optional TRIAC dimmable driver. Order code 89048T.



Optional DALI & Push to DIM driver. Order code 89050L.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50130FA/W/D	White	Daylight	6000K	30W	2100lm	120°	230V		280x280mm	50mm	15	Complete with driver
50130FA/W/C	White	Cool white	4000K	30W	2100lm	120°	230V		280x280mm	50mm	15	Complete with driver
50130FA/W/W	White	Warm white	3000K	30W	1800lm	120°	230V		280x280mm	50mm	15	Complete with driver
50130FA/G/D	Grey	Daylight	6000K	30W	2100lm	120°	230V		280x280mm	50mm	15	Complete with driver
50130FA/G/C	Grey	Cool white	4000K	30W	2100lm	120°	230V		280x280mm	50mm	15	Complete with driver
50130FA/G/W	Grey	Warm white	3000K	30W	1800lm	120°	230V		280x280mm	50mm	15	Complete with driver
50148PE/W/C	White	Cool white	4000K	48W	4100lm	120°	1200mA	III	585x585mm	80mm	4	Requires 1200mA driver
50148PE/W/W	White	Warm white	3000K	48W	3900lm	120°	1200mA	III	585x585mm	80mm	4	Requires 1200mA driver



The 40W Square Panels
Aluminium



50140E | 40W | SMD 4014 | 595x595mm | Aluminium

IP20

80 CRI CE



Optional suspension kit.
Order code 050017.



Optional DALI & Push to DIM driver.
Order code 89050L.



D A Germany / Austria

50140AE | 40W | SMD 2835 | 620x620mm | Aluminium

Driver must be ordered separately.

IP20

80 CRI DIMMABLE CE



Optional suspension kit.
Order code 050017.



Optional recessed kit (4pcs).
Order code 050108.



Optional non-dimmable driver.
Order code 89040.



Optional DALI & Push to DIM driver.
Order code 89050L.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50140E/W/D	White	Daylight	6000K	40W	3400lm	230V		50mm	6	Complete with 950mA driver
50140E/W/C	White	Cool white	4000K	40W	3400lm	230V		50mm	6	Complete with 950mA driver
50140E/W/W	White	Warm white	3000K	40W	3100lm	950mA		50mm	6	Complete with 950mA driver
50140AE/W/C	White	Cool white	4000K	40W	3400lm	950mA		50mm	4	Requires 950mA driver



The 48W Square Panels
Aluminium



50148E | 48W | SMD 2835 | 595x595mm | Aluminium

Driver must be ordered separately.

IP20 80 CRI DIMMABLE CE


Optional suspension kit. Order code 050017.


Optional recessed kit (4pcs). Order code 050108.


Optional non-dimmable driver. Order code 89048.


Optional TRIAC dimmable driver. Order code 89048T.


Optional DALI & Push to DIM driver. Order code 89050L.



50143F | 48W | SMD 2835 | 595x595mm | Aluminium

Complete with driver.

IP20 80 CRI CE


Optional suspension kit. Order code 050017.


Optional recessed kit (4pcs). Order code 050108.


Optional TRIAC dimmable driver. Order code 89048T.


Optional DALI & Push to DIM driver. Order code 89050L.



D A Germany / Austria

50148AE | 48W | SMD 2835 | 620x620mm | Aluminium

Driver must be ordered separately.

IP20 80 CRI DIMMABLE CE


Optional suspension kit. Order code 050017.


Optional recessed kit (4pcs). Order code 050108.


Optional non-dimmable driver. Order code 89048.


Optional TRIAC dimmable driver. Order code 89048T.


Optional DALI & Push to DIM driver. Order code 89050L.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50148E/W/C	White	Cool white	4000K	48W	4200lm	1200mA	III	50mm	4	Requires 1200mA driver
50148E/W/W	White	Warm white	3000K	48W	4000lm	1200mA	III	50mm	4	Requires 1200mA driver
50143F/W/D	White	Daylight	6000K	48W	3800lm	230V	□	50mm	4	Complete with driver
50148AE/W/C	White	Cool white	4000K	48W	4100lm	1200mA	III	50mm	4	Requires 1200mA driver



Square UGR19 Office Panels

Aluminium



50148U | 48W | SMD 2835 | 595x595mm | Aluminium

Driver must be ordered separately.

IP20 120° 80 CRI DIMMABLE CE UGR19



Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



Optional non-dimmable driver. Order code 89048.



Optional TRIAC dimmable driver. Order code 89048T.



Optional DALI & Push to DIM driver. Order code 89050L.



D A Germany / Austria

50148AU | 48W | SMD 2835 | 620x620mm | Aluminium

Driver must be ordered separately.

IP20 120° 80 CRI DIMMABLE CE UGR19



Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



Optional non-dimmable driver. Order code 89048.



Optional TRIAC dimmable driver. Order code 89048T.



Optional DALI & Push to DIM driver. Order code 89050L.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
50148U/W/D	White	Daylight	6000K	48W	4100lm	120°	1200mA	III	55mm	4	Requires 1200mA driver
50148U/W/C	White	Cool white	4000K	48W	4100lm	120°	1200mA	III	55mm	4	Requires 1200mA driver
50148U/W/W	White	Warm white	3000K	48W	3900lm	120°	1200mA	III	55mm	4	Requires 1200mA driver
50148AU/W/C	White	Cool white	4000K	48W	4000lm	120°	1200mA	III	55mm	4	Requires 1200mA driver
50148AU/W/W	White	Warm white	3000K	48W	3800lm	120°	1200mA	III	55mm	4	Requires 1200mA driver



Square IP65 Panels

Aluminium



50140W | 40W | SMD 2835 | Aluminium

IP65 80 CRI


CE



Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.





50140AW | 40W | SMD 2835 | Aluminium

IP65 80 CRI


CE



Optional suspension kit. Order code 050017.



Optional recessed kit (4pcs). Order code 050108.



D A Germany / Austria

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
50140W/W/C	White	Cool white	4000K	40W	3200lm	120°	100-240V	☐	55mm	4	Complete with driver
50140AW/W/C	White	Cool white	4000K	40W	3200lm	120°	100-240V	☐	55mm	4	Complete with driver



The Rectangular Panels

Aluminium



50148RE | 48W | SMD 2835 | 1195x295mm | Aluminium

Driver must be ordered separately.

IP20 | 80 CRI | DIMMABLE | CE



Optional suspension kit. Order code 050017.

Requires 2 sets.



Optional recessed kit (4pcs). Order code 050108.



Optional non-dimmable driver. Order code 89048.



Optional TRIAC dimmable driver. Order code 89048T.



Optional DALI & Push to DIM driver. Order code 89050L.



50160E | 60W | SMD 2835 | 1195x595mm | Aluminium

Driver must be ordered separately.

IP20 | 80 CRI | DIMMABLE | CE



Optional suspension kit. Order code 050017 (x2).


Requires 2 sets.



Optional recessed kit (4pcs). Order code 050108.



Non-dimmable driver. Order code 89060.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
50148RE/W/D	White	Daylight	6000K	48W	4100lm	1200mA	III	50mm	4	Requires 1200mA driver
50148RE/W/C	White	Cool white	4000K	48W	4100lm	1200mA	III	50mm	4	Requires 1200mA driver
50148RE/W/W	White	Warm white	3000K	48W	3900lm	1200mA	III	50mm	4	Requires 1200mA driver
50160E/W/D	White	Daylight	6000K	60W	4900lm	1300mA	III	50mm	2	Requires 1300mA driver
50160E/W/C	White	Cool white	4000K	60W	4900lm	1300mA	III	50mm	2	Requires 1300mA driver
50160E/W/W	White	Warm white	3000K	60W	4700lm	1300mA	III	50mm	2	Requires 1300mA driver



10122FD/W/C



10116FD/W/C



10108FD/W/C

The Dark Light Dome Reflector

Die cast



10108FD | 8W | SMD 2835 | Die cast

IP20 80 CRI

DARK LIGHT CE








10116FD | 16W | SMD 2835 | Die cast

IP20 80 CRI

DARK LIGHT CE







10122FD | 22W | SMD 2835 | Die cast

IP20 80 CRI

DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10108FD/W/C	White	Cool white	4000K	8W	560lm	230V		94mm	60mm	45	Complete with driver
10108FD/W/W	White	Warm white	3000K	8W	560lm	230V		94mm	60mm	45	Complete with driver
10116FD/W/C	White	Cool white	4000K	16W	1150lm	230V		155mm	80mm	20	Complete with driver
10116FD/W/W	White	Warm white	3000K	16W	1150lm	230V		155mm	80mm	20	Complete with driver
10122FD/W/C	White	Cool white	4000K	22W	1550lm	230V		210mm	90mm	20	Complete with driver
10122FD/W/W	White	Warm white	3000K	22W	1550lm	230V		210mm	90mm	20	Complete with driver



The Budget Downlight Range

Aluminium



10103T | 3W | SMD 2835 | Aluminium

IP20 80 CRI

CE







10107T | 7W | SMD 2835 | Aluminium

IP20 80 CRI

CE







10115T | 15W | SMD 2835 | Aluminium

IP20 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10103T/W/C	White	Cool white	4000K	3W	220lm	120°	230V	☐	68mm	50mm	100	Complete with driver
10103T/W/W	White	Warm white	3000K	3W	210lm	120°	230V	☐	68mm	50mm	100	Complete with driver
10107T/W/C	White	Cool white	4000K	7W	520lm	120°	230V	☐	85mm	60mm	60	Complete with driver
10107T/W/W	White	Warm white	3000K	7W	490lm	120°	230V	☐	85mm	60mm	60	Complete with driver
10115T/W/C	White	Cool white	4000K	15W	1100lm	120°	230V	☐	130mm	60mm	30	Complete with driver
10115T/W/W	White	Warm white	3000K	15W	1050lm	120°	230V	☐	130mm	60mm	30	Complete with driver

The Budget Downlight Range

Aluminium





10124T | 24W | SMD 2835 | Aluminium

IP20 80 CRI

CE







10130T | 30W | SMD 2835 | Aluminium

IP20 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10124T/W/C	White	Cool white	4000K	24W	1800lm	120°	230V	☐	210mm	75mm	20	Complete with driver
10124T/W/W	White	Warm white	3000K	24W	1700lm	120°	230V	☐	210mm	75mm	20	Complete with driver
10130T/W/C	White	Cool white	4000K	30W	2250lm	120°	230V	☐	210mm	75mm	20	Complete with driver
10130T/W/W	White	Warm white	3000K	30W	2100lm	120°	230V	☐	210mm	75mm	20	Complete with driver

The Chrome Bezel Range

Aluminium





10107 | 7W | SMD LED | Aluminium

IP44 80 CRI

CE







10115 | 15W | SMD 2835 | Aluminium

IP44 80 CRI

CE







10124 | 24W | SMD 2835 | Aluminium

IP44 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107/W/C	White	Cool white	4000K	7W	420lm	120°	100-240V		112mm	140mm	18	Complete with driver
10107/W/W	White	Warm white	3000K	7W	380lm	120°	100-240V		112mm	140mm	18	Complete with driver
10115/W/C	White	Cool white	4000K	15W	1050lm	120°	230V		160mm	150mm	8	Complete with driver
10115/W/W	White	Warm white	3000K	15W	1000lm	120°	230V		160mm	150mm	8	Complete with driver
10115/G/C	Grey	Cool white	4000K	15W	1050lm	120°	230V		160mm	150mm	8	Complete with driver
10124/W/C	White	Cool white	4000K	24W	1550lm	120°	230V		210mm	160mm	8	Complete with driver
10124/W/W	White	Warm white	3000K	24W	1450lm	120°	230V		210mm	160mm	8	Complete with driver
10124/G/C	Grey	Cool white	4000K	24W	1550lm	120°	230V		210mm	160mm	8	Complete with driver
10124/G/W	Grey	Warm white	3000K	24W	1450lm	120°	230V		210mm	160mm	8	Complete with driver



The COB Downlight Range

Aluminium



10110C | 10W | COB LED | Aluminium

IP20 80 CRI

CE







10120C | 20W | COB LED | Aluminium

IP20 80 CRI

CE







10130C | 30W | COB LED | Aluminium 80 CRI

10130CR | 30W | COB LED | Aluminium 90 CRI

IP20

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10110C/W/C	White	Cool white	4000K	10W	700lm	80°	230V	☐	95mm	90mm	40	Complete with driver
10110C/W/W	White	Warm white	3000K	10W	700lm	80°	230V	☐	95mm	90mm	40	Complete with driver
10110C/G/C	Grey	Cool white	4000K	10W	700lm	80°	230V	☐	95mm	90mm	40	Complete with driver
10110C/G/W	Grey	Warm white	3000K	10W	700lm	80°	230V	☐	95mm	90mm	40	Complete with driver
10120C/W/C	White	Cool white	4000K	20W	1400lm	80°	230V	☐	160mm	100mm	18	Complete with driver
10120C/W/W	White	Warm white	3000K	20W	1400lm	80°	230V	☐	160mm	100mm	18	Complete with driver
10120C/G/C	Grey	Cool white	4000K	20W	1400lm	80°	230V	☐	160mm	100mm	18	Complete with driver
10120C/G/W	Grey	Warm white	3000K	20W	1400lm	80°	230V	☐	160mm	100mm	18	Complete with driver
10130C/W/C	White	Cool white	4000K	30W	2200lm	80°	230V	☐	210mm	120mm	9	Complete with driver
10130C/W/W	White	Warm white	3000K	30W	2200lm	80°	230V	☐	210mm	120mm	9	Complete with driver
10130C/G/C	Grey	Cool white	4000K	30W	2200lm	80°	230V	☐	210mm	120mm	9	Complete with driver
10130C/G/W	Grey	Warm white	3000K	30W	2200lm	80°	230V	☐	210mm	120mm	9	Complete with driver
10130CR/W/W	White	Warm white	3000K	30W	2200lm	80°	230V	☐	210mm	120mm	9	Complete with driver

The COB Downlight Range

Die cast





10107CA | 7W | COB LED | Die cast

IP20 80 CRI

CE







10110CA | 10W | COB LED | Die cast

IP20 80 CRI

CE







10115CA | 15W | COB LED | Die cast

IP20 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107CA/W/C	White	Cool white	4000K	7W	560lm	60°	230V	☐	75mm	70mm	50	Complete with driver
10107CA/W/W	White	Warm white	3000K	7W	560lm	60°	230V	☐	75mm	70mm	50	Complete with driver
10110CA/W/C	White	Cool white	4000K	10W	850lm	60°	230V	☐	95mm	100mm	50	Complete with driver
10110CA/W/W	White	Warm white	3000K	10W	850lm	60°	230V	☐	95mm	100mm	50	Complete with driver
10115CA/W/C	White	Cool white	4000K	15W	1275lm	60°	230V	☐	125mm	100mm	30	Complete with driver
10115CA/W/W	White	Warm white	3000K	15W	1275lm	60°	230V	☐	125mm	100mm	30	Complete with driver



The COB Downlight Range

Die cast



10120CA | 20W | COB LED | Die cast

IP20 80 CRI

CE









10130CA | 30W | COB LED | Die cast

IP20 80 CRI

CE









10160CA | 60W | COB LED | Die cast

IP20 80 CRI

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120CA/W/C	White	Cool white	4000K	20W	1800lm	60°	230V	☐	145mm	100mm	20	Complete with driver
10120CA/W/W	White	Warm white	3000K	20W	1800lm	60°	230V	☐	145mm	100mm	20	Complete with driver
10130CA/W/C	White	Cool white	4000K	30W	2700lm	60°	230V	☐	210mm	140mm	10	Complete with driver
10130CA/W/W	White	Warm white	3000K	30W	2700lm	60°	230V	☐	210mm	140mm	10	Complete with driver
10160CA/W/C	White	Cool white	4000K	60W	5400lm	60°	230V	☐	210mm	160mm	10	Complete with driver
10160CA/W/W	White	Warm white	3000K	60W	5400lm	60°	230V	☐	210mm	160mm	10	Complete with driver

The Semi Dark Light COB Pro Range

Die cast





10107CD | 7W | COB LED | Die cast

IP20 80 CRI

CE







10115CD | 15W | COB LED | Die cast

IP20 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107CD/W/C	White	Cool white	4000K	7W	560lm	180°	230V	☐	100mm	70mm	30	Complete with driver
10107CD/W/W	White	Warm white	3000K	7W	511lm	180°	230V	☐	100mm	70mm	30	Complete with driver
10115CD/W/C	White	Cool white	4000K	15W	1200lm	180°	230V	☐	160mm	90mm	18	Complete with driver
10115CD/W/W	White	Warm white	3000K	15W	1095lm	180°	230V	☐	160mm	90mm	18	Complete with driver



The Semi Dark Light COB Pro Range

Die cast



10130CD | 30W | COB LED | Die cast

IP20 80 CRI







10140CD | 40W | COB LED | Die cast

IP20 80 CRI





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10130CD/W/C	White	Cool white	4000K	30W	2400lm	180°	230V	☐	215mm	100mm	6	Complete with driver
10130CD/W/W	White	Warm white	3000K	30W	2190lm	180°	230V	☐	215mm	100mm	6	Complete with driver
10140CD/W/C	White	Cool white	4000K	40W	3200lm	180°	230V	☐	245mm	100mm	6	Complete with driver
10140CD/W/W	White	Warm white	3000K	40W	2920lm	180°	230V	☐	245mm	100mm	6	Complete with driver



The COB Project Round Range

Die cast



10105K | 5W | COB LED | Die cast

IP53 80 CRI

CE







10110K | 10W | COB LED | Die cast

IP53 80 CRI

TRIAC DIMMABLE

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10105K/W/C	White	Cool white	4500K	5W	410lm	100°	230V	☐	107mm	130mm	24	Complete with dimmable driver
10105K/W/W	White	Warm white	3000K	5W	350lm	100°	230V	☐	107mm	130mm	24	Complete with dimmable driver
10105K/G/C	Grey	Cool white	4500K	5W	410lm	100°	230V	☐	107mm	130mm	24	Complete with dimmable driver
10105K/G/W	Grey	Warm white	3000K	5W	350lm	100°	230V	☐	107mm	130mm	24	Complete with driver
10110K/W/W	White	Warm white	3000K	10W	600lm	100°	230V	☐	122mm	150mm	24	Complete with dimmable driver
10110K/G/W	Grey	Warm white	3000K	10W	600lm	100°	230V	☐	122mm	150mm	24	Complete with dimmable driver



The COB Project Round Range

Die cast



10120K | 20W | COB LED | Die cast

IP53 80 CRI

TRIAC DIMMABLE

CE







10130K | 30W | COB LED | Die cast

IP53 80 CRI

TRIAC DIMMABLE

CE







10130KA | 30W | COB LED | Die cast

IP53 80 CRI

TRIAC DIMMABLE

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120K/W/W	White	Warm white	3000K	20W	1500lm	100°	230V	☐	150mm	170mm	24	Complete with dimmable driver
10120K/G/C	Grey	Cool white	4500K	20W	1600lm	100°	230V	☐	150mm	170mm	24	Complete with dimmable driver
10120K/G/W	Grey	Warm white	3000K	20W	1500lm	100°	230V	☐	150mm	170mm	24	Complete with dimmable driver
10130K/W/W	White	Warm white	3000K	30W	2000lm	100°	230V	☐	175mm	195mm	12	Complete with dimmable driver
10130K/G/W	Grey	Warm white	3000K	30W	2000lm	100°	230V	☐	175mm	195mm	12	Complete with dimmable driver
10130KA/W/W	White	Warm white	3000K	30W	2000lm	100°	230V	☐	210mm	210mm	12	Complete with dimmable driver
10130KA/G/W	Grey	Warm white	3000K	30W	2000lm	100°	230V	☐	210mm	210mm	12	Complete with dimmable driver



The COB Project Square Range

Die cast



50105K | 5W | COB LED | Die cast

IP53 80 CRI

CE






50110K | 10W | COB LED | Die cast

IP53 80 CRI

CE






50120K | 20W | COB LED | Die cast

IP53 80 CRI

CE






50130K | 30W | COB LED | Die cast

IP53 80 CRI

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
50105K/W/W	White	Warm white	3000K	5W	240lm	100°	230V	☐	85x85mm	115mm	24	Complete with driver
50105K/G/C	Grey	Cool white	4500K	5W	310lm	100°	230V	☐	85x85mm	115mm	24	Complete with driver
50105K/G/W	Grey	Warm white	3000K	5W	240lm	100°	230V	☐	85x85mm	115mm	24	Complete with driver
50110K/G/C	Grey	Cool white	4500K	10W	650lm	100°	230V	☐	100x100mm	130mm	24	Complete with driver
50120K/G/C	Grey	Cool white	4500K	20W	1060lm	100°	230V	☐	147x147mm	160mm	12	Complete with driver
50120K/G/W	Grey	Warm white	3000K	20W	930lm	100°	230V	☐	147x147mm	160mm	12	Complete with driver
50130K/G/C	Grey	Cool white	4500K	30W	1770lm	100°	230V	☐	147x147mm	160mm	12	Complete with driver
50130K/G/W	Grey	Warm white	3000K	30W	1350lm	100°	230V	☐	147x147mm	160mm	12	Complete with driver



Round Downlights
Aluminium




10120 | 20W | LED | Aluminium — Ring must be ordered separately.

IP44 75 CRI

CE










10142 | 42W | COB LED | Aluminium — Ring must be ordered separately.

IP20 80 CRI

CE










10100 | Rings for 10120 & 10142

CE

10100/AL Aluminium
10100/W White
10100/G Grey



50

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10120/C	Cool white	4000K	20W	1800lm	110°	230V	⧈	180mm	70mm	10	Complete with driver
10120/W	Warm white	3000K	20W	1800lm	110°	230V	⧈	180mm	70mm	10	Complete with driver
10142/C	Cool white	4000K	42W	3290lm	60°	100-240V	⧈	180mm	170mm	4	Complete with driver
10142/W	Warm white	3000K	42W	3225lm	60°	100-240V	⧈	180mm	170mm	4	Complete with driver



10112/G/D



10128/G/D

Architectural Downlights

Die cast




10112/G/D | 9W | LED | Die cast

IP20 80 CRI

CE








10128/G/D | 28W | LED | Die cast

IP20 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10112/G/D	Grey	Daylight	6000K	9W	400lm	90°	230V	☐	89mm	110mm	10	Complete with driver
10128/G/D	Grey	Daylight	6000K	28W	1400lm	90°	230V	☐	169mm	110mm	10	Complete with driver



Architectural Downlights

Die cast




10112/G/W | 12W | LED | Die cast

IP20 80 CRI

CE








10128/G/W | 28W | LED | Die cast

IP20 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10112/G/W	Grey	Warm white	3000K	12W	400lm	90°	230V	☐	89mm	110mm	10	Complete with driver
10128/G/W	Grey	Warm white	3000K	28W	1150lm	90°	230V	☐	169mm	110mm	10	Complete with driver



The COB Dark Light Range

Aluminium




10112D | 12W | COB LED | Aluminium

IP40 80 CRI

DARK LIGHT CE







10118D | 18W | COB LED | Aluminium

IP40 80 CRI

DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10112D/W/W	White	Warm white	3000K	12W	633lm	38°	100-240V	☐	100mm	130mm	30	Complete with driver
10118D/W/C	White	Cool white	4000K	18W	1125lm	30°	100-240V	☐	115mm	140mm	20	Complete with driver



10112KD/W/W

10107KD/W/W

The SMD Dark Light Range

Plastic



10107KD | 7W | SMD LED | Plastic

IP20 DIMMABLE 80 CRI

DARK LIGHT QUICK FIX CE







10112KD | 12W | SMD LED | Plastic

IP20 DIMMABLE 80 CRI

DARK LIGHT QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10107KD/W/W	White	Warm white	3000K	7W	500lm	100°	350mA	III	30cm	113mm	125mm	24	Requires 350mA driver
10112KD/W/C	White	Cool white	4000K	12W	900lm	100°	350mA	III	30cm	168mm	160mm	12	Requires 350mA driver
10112KD/W/W	White	Warm white	3000K	12W	850lm	100°	350mA	III	30cm	168mm	160mm	12	Requires 350mA driver

Dark Light Downlights

Aluminium





10105E | 5W | LED | Natural aluminium

IP40 DIMMABLE
DARK LIGHT QUICK FIX CE







10115E | 15W | LED | Semi trimless | Natural aluminium

IP40 DIMMABLE
DARK LIGHT QUICK FIX CE







10130A | 30W | SMD LED | Aluminium

IP20 80 CRI
DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10105E/AL/C	Aluminium	Cool white	4000K	5W	375lm	-	500mA	III	40cm	85mm	110mm	20	Requires 500mA driver
10105E/AL/W	Aluminium	Warm white	3000K	5W	360lm	-	500mA	III	40cm	85mm	110mm	20	Requires 500mA driver
10115E/AL/C	Aluminium	Cool white	4000K	15W	1125lm	-	700mA	III	40cm	125mm	150mm	20	Requires 700mA driver
10115E/AL/W	Aluminium	Warm white	3000K	15W	1050lm	-	700mA	III	40cm	125mm	150mm	20	Requires 700mA driver
10130A/AL/W	Aluminium	Warm white	3000K	30W	2300lm	80°	100-240V		-	210mm	170mm	5	Complete with driver
10130A/W/W	White	Warm white	3000K	30W	2300lm	80°	100-240V		-	210mm	170mm	5	Complete with driver





10113A | 15W | COB LED | Aluminium

IP20 80 CRI

DARK LIGHT CE







10150T | 38W/50W | COB LED | Trimless | Die cast

38W@1050mA / 50w@1400mA

IP20 90 CRI

DIMMABLE DARK LIGHT QUICK FIX

CE




Optional non-dimmable driver. Order code 89048.



Optional TRIAC dimmable driver. Order code 89048T.



Optional DALI & Push to DIM driver. Order code 89050L.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10113A/W/W	White	Warm white	3000K	15W	1000lm	50°	100-240V		-	95mm	130mm	20	Complete with driver
10150T/W/C	White	Cool white	4000K	38W/50W	2700lm/3750lm	24°	1050mA/1400mA		50cm	170mm	160mm	6	Requires 1050mA/1400mA driver
10150T/W/W	White	Warm white	3000K	38W/50W	2500lm/3500lm	24°	1050mA/1400mA		50cm	170mm	160mm	6	Requires 1050mA/1400mA driver



The IP54 Dark Light Bathroom Downlights

Die cast



10109FD | 9W | SMD 2835 | Die cast

IP54 80 CRI

DARK LIGHT CE







10120FD | 20W | SMD 2835 | Die cast

IP54 80 CRI

DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
10109FD/W/C	White	Cool white	4000K	9W	765lm	230V		111mm	70mm	40	Complete with driver
10109FD/W/W	White	Warm white	3000K	9W	765lm	230V		111mm	70mm	40	Complete with driver
10120FD/W/C	White	Cool white	4000K	20W	1700lm	230V		166mm	70mm	20	Complete with driver
10120FD/W/W	White	Warm white	3000K	20W	1700lm	230V		166mm	70mm	20	Complete with driver

The IP54 Bathroom Downlights

Die cast



10125B/W/C



10113B/W/C



10107B/W/C




10107B | 7W | SMD 2835 | Die cast

IP54 80 CRI

CE







10113B | 13W | SMD 2835 | Die cast

IP54 80 CRI

CE








10125B | 25W | SMD 2835 | Die cast

IP54 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
10107B/W/C	White	Cool white	4000K	7W	540lm	90°	100-240V	☐	65mm	70mm	50	Complete with driver
10107B/W/W	White	Warm white	3000K	7W	500lm	90°	100-240V	☐	65mm	70mm	50	Complete with driver
10113B/W/C	White	Cool white	4000K	13W	950lm	90°	100-240V	☐	95mm	70mm	24	Complete with driver
10113B/W/W	White	Warm white	3000K	13W	925lm	90°	100-240V	☐	95mm	70mm	24	Complete with driver
10125B/W/C	White	Cool white	4000K	25W	2000lm	90°	100-240V	☐	210mm	80mm	10	Complete with driver
10125B/W/W	White	Warm white	3000K	25W	1875lm	90°	100-240V	☐	210mm	80mm	10	Complete with driver



The Outdoor/Bathroom IP65 Range

Die cast




10110G | 10W | COB LED | Die cast

IP65 80 CRI

CE








10115G | 15W | COB LED | Die cast

IP65 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10110G/W/C	White	Cool white	4000K	10W	800lm	60°	230V		200cm	82mm	90mm	50	Complete with driver
10110G/W/W	White	Warm white	3000K	10W	750lm	60°	230V		200cm	82mm	90mm	50	Complete with driver
10115G/W/C	White	Cool white	4000K	15W	1200lm	60°	230V		200cm	100mm	95mm	20	Complete with driver
10115G/W/W	White	Warm white	3000K	15W	1125lm	60°	230V		200cm	100mm	95mm	20	Complete with driver



The Outdoor/Bathroom IP65 Range

Die cast



10120G | 20W | COB LED | Die cast

IP65 80 CRI

CE







10130G | 30W | COB LED | Die cast

IP65 80 CRI

CE







10150G | 50W | COB LED | Die cast

IP65 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
10120G/W/C	White	Cool white	4000K	20W	1600lm	60°	230V	☐	200cm	120mm	105mm	10	Complete with driver
10120G/W/W	White	Warm white	3000K	20W	1500lm	60°	230V	☐	200cm	120mm	105mm	10	Complete with driver
10130G/W/C	White	Cool white	4000K	30W	2600lm	60°	230V	☐	200cm	160mm	120mm	8	Complete with driver
10130G/W/W	White	Warm white	3000K	30W	2500lm	60°	230V	☐	200cm	160mm	120mm	8	Complete with driver
10150G/W/C	White	Cool white	4000K	50W	4100lm	60°	230V	☐	200cm	210mm	140mm	4	Complete with driver
10150G/W/W	White	Warm white	3000K	50W	4000lm	60°	230V	☐	200cm	210mm	140mm	4	Complete with driver





07

Downlights Adjustable

Pages 159-176

R111 | PAR30 | HQI | E27 | G53 | G12 | G8,5 | Rx7s

Die cast | Natural aluminium | Metal | Gypsum | Trimless

IP20

ADJUSTABLE DARK LIGHT QUICK FIX





Adjustable Round

Die cast

11110D | 75W | R111 | G53 | Die cast



IP20 ADJUSTABLE

CE



Suitable for LED module.



11070RD | 75W | PAR30 | E27 | Die cast



IP20 ADJUSTABLE

QUICK FIX CE





11070D | 70W | HQI | G12 | Die cast



IP20 ADJUSTABLE

QUICK FIX CE



Suitable for 8010L
LED lamp (Direct 230V).



Order Code	Colour	Watts	Input	Class					Notes
11110D/W	White	75W	12V		15cm	155mm	80mm	36	-
11070RD/G	Grey	75W	100-240V		30cm	155mm	180mm	12	-
11070D/W/5	White	70W	230V		30cm	155mm	180mm	12	Requires ballast 89070/ELE
11070D/MC/5	Brushed chrome	70W	230V		30cm	155mm	180mm	12	Requires ballast 89070/ELE



Adjustable R111 Shop Range

Aluminium



11110N | 75W | R111 | G53 | Aluminium

IP20 ADJUSTABLE

CE



Suitable for LED module.






51110N | 75W | R111 | G53 | Aluminium

IP20 ADJUSTABLE

CE



Suitable for LED module.






51210N | 2x75W | R111 | G53 | Aluminium

IP20 ADJUSTABLE

CE



Suitable for LED module.

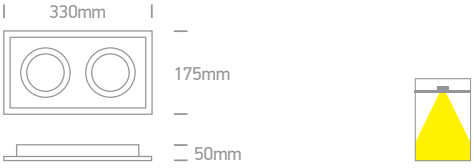




51310N | 3x75W | R111 | G53 | Aluminium

IP20 ADJUSTABLE

CE



Suitable for LED module.



Order Code	Colour	Watts	Input	Class					Notes
11110N/W	White	75W	12V	III	30cm	165mm	160mm	30	-
51110N/W	White	75W	12V	III	30cm	165x165mm	160mm	30	-
51210N/W	White	2x75W	12V	III	30cm	315x165mm	160mm	15	-
51310N/W	White	3x75W	12V	III	30cm	460x165mm	160mm	10	-



Adjustable HQI Range


Die cast



11120U | 20W | HQI | PGJ5 | Die cast

IP20 ADJUSTABLE

QUICK FIX CE





0702/15 | 15° Reflector for 11120U

CE






11170U | 70W | HQI | G8,5 | Die cast

IP20 ADJUSTABLE

QUICK FIX CE



Order Code	Colour	Watts	Input	Class	Beam Angle	S				Notes
11120U/B	Black	20W	230V		53°	30cm	108mm	120mm	36	For Philips 20W use ballast 89020B/ELE
11120U/G	Grey	20W	230V		53°	30cm	108mm	120mm	36	For Philips 20W use ballast 89020B/ELE
11120U/MC	Brushed chrome	20W	230V		53°	30cm	108mm	120mm	36	For Philips 20W use ballast 89020B/ELE
11170U/W	White	70W	230V		53°	30cm	130mm	140mm	24	Requires ballast 89070/ELE
11170U/MC	Brushed chrome	70W	230V		53°	30cm	130mm	140mm	24	Requires ballast 89070/ELE



Adjustable Round Range

Die cast



11150U | 150W | HQI | G12 | Die cast

IP20 ADJUSTABLE

QUICK FIX CE



Suitable for 8010L
LED lamp (Direct 230V).





0706/14 | 14° Reflector for 11150U

CE





11110U | 75W | R111 | G53 | Die cast

IP20 ADJUSTABLE

CE



Order Code	Colour	Watts	Input	Class	Beam Angle					Notes
11150U/MC	Brushed chrome	150W	230V		67°	30cm	152mm	180mm	18	Requires ballast 89150/ELE
11110U/G	Grey	75W	12V		-	30cm	152mm	180mm	18	-



11070AB/AL

11070EA/MC/30

51070/G/1

Adjustable HQI Range



11070AB | 70W | HQI | G12 | Natural aluminium

IP20 ADJUSTABLE

QUICK FIX CE



Suitable for 8010L LED lamp (Direct 230V).





11070EA | 70W | HQI | G12 | Die cast

IP20 ADJUSTABLE

DARK LIGHT QUICK FIX CE



Suitable for 8010L LED lamp (Direct 230V).





51070 | 70W | HQI | Rx7s | Die cast

IP20 ADJUSTABLE

QUICK FIX CE



Suitable for 7610L LED lamp (Direct 230V).





51150 | 150W | HQI | Rx7s | Die cast

IP20 ADJUSTABLE

QUICK FIX CE




Suitable for 7612L LED lamp (Direct 230V).



Order Code	Colour	Watts	Input	Class	Beam Angle					Notes
11070AB/AL	Aluminium	70W	230V		-	40cm	150mm	180mm	12	Requires ballast 89070/ELE
11070EA/W/30	White	70W	230V		30°	30cm	148mm	155mm	24	Requires ballast 89070/ELE
11070EA/G/30	Grey	70W	230V		30°	30cm	148mm	155mm	24	Requires ballast 89070/ELE
11070EA/MC/30	Brushed chrome	70W	230V		30°	30cm	148mm	155mm	24	Requires ballast 89070/ELE
51070/G/1	Grey	70W	230V		-	-	130x215mm	130mm	12	Requires ballast 89070/ELE
51070/MC/1	Brushed chrome	70W	230V		-	-	130x215mm	130mm	12	Requires ballast 89070/ELE
51150/G/1	Grey	150W	230V		-	-	130x215mm	130mm	12	Requires ballast 89150/ELE
51150/MC/1	Brushed chrome	150W	230V		-	-	130x215mm	130mm	12	Requires ballast 89150/ELE



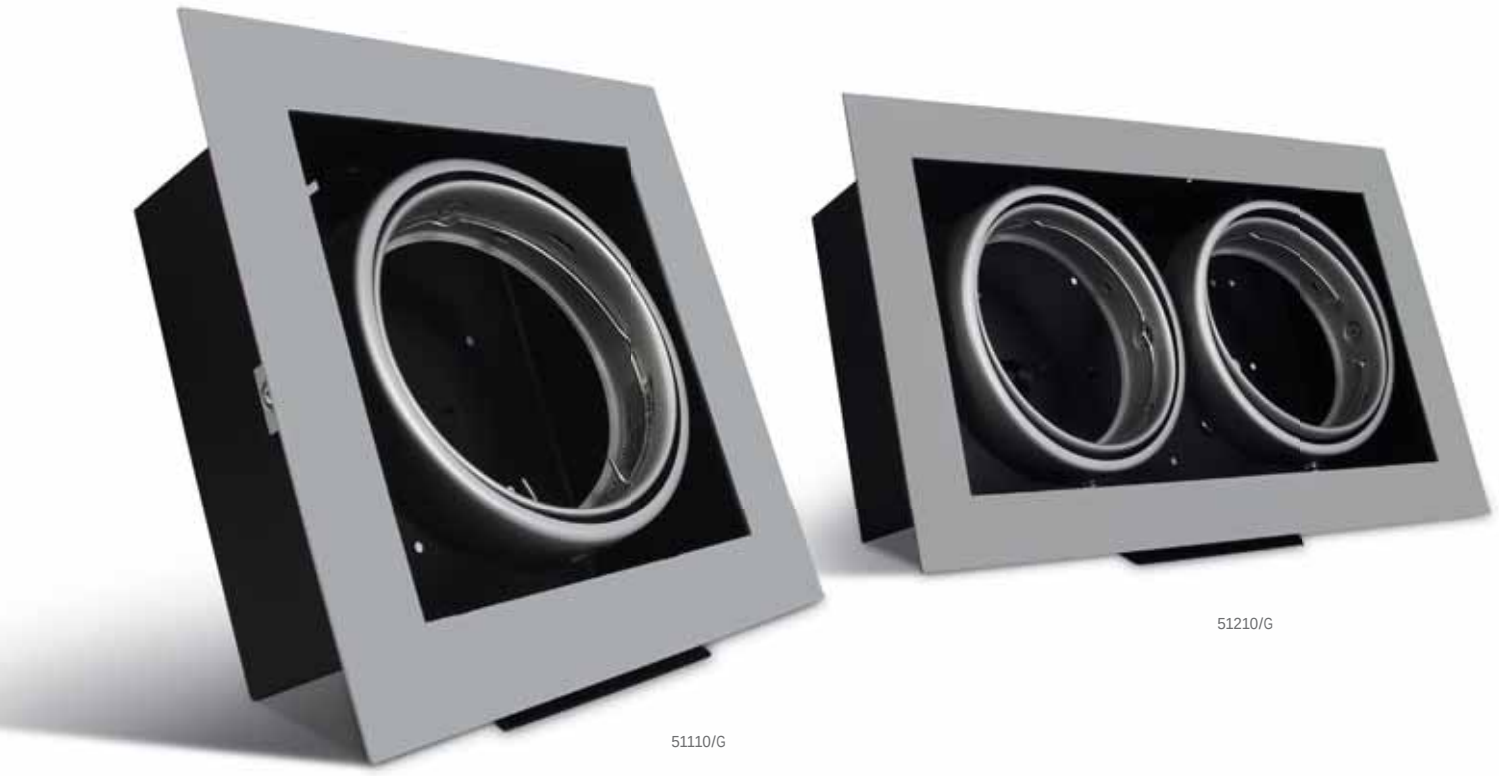

Adjustable R111 Range

Die cast



51110 | 50W | R111 | G53 | Die cast

IP20 ADJUSTABLE

CE



Suitable for LED lamps.





51210 | 2x50W | R111 | G53 | Die cast

IP20 ADJUSTABLE

CE



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class					Notes
51110/W	White	50W	12V	III	15cm	180x180mm	120mm	8	-
51110/G	Grey	50W	12V	III	15cm	180x180mm	120mm	8	-
51210/W	White	2x50W	12V	III	15cm	320x180mm	120mm	6	-
51210/G	Grey	2x50W	12V	III	15cm	320x180mm	120mm	6	-



Adjustable G12 Range

Die cast




51250K | 2x70W | HQI | G12 | Die cast

IP20 ADJUSTABLE

QUICK FIX CE



Suitable for 8010L
LED lamp (Direct 230V).





51450K | 4x70W | HQI | G12 | Die cast

IP20 ADJUSTABLE

QUICK FIX CE



Suitable for 8010L
LED lamp (Direct 230V).



Order Code	Colour	Watts	Input	Class					Notes
51250K/G/5	Grey	2x70W	230V		15cm	320x180mm	210mm	6	Requires ballast 89070/ELE x2
51450K/G/5	Grey	4x70W	230V		15cm	330x330mm	210mm	4	Requires ballast 89070/ELE x4

Multi System Metal Bases

For Modules on page 168




51100R | Metal






11100R | Metal






51200R | Metal






51200AR | Metal






51300R | Metal






51300AR | Metal






51400R | Metal






51400AR | Metal





51401R | Metal

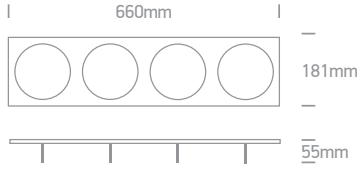

Order Code	Colour			Notes
51100R/W	White	150mm	24	-
51100R/G	Grey	150mm	24	-
51200R/W	White	330x150mm	20	-
51200R/G	Grey	330x150mm	20	-
51300R/G	Grey	470x150mm	20	-
51400R/W	White	330x330mm	10	-
51400R/G	Grey	330x330mm	10	-
51401R/W	White	630x150mm	20	-
51401R/G	Grey	630x150mm	20	-

Order Code	Colour			Notes
11100R/W	White	150mm	24	-
11100R/G	Grey	150mm	24	-
51200AR/W	White	330x150mm	20	-
51200AR/G	Grey	330x150mm	20	-
51300AR/G	Grey	470x150mm	20	-
51400AR/W	White	330x330mm	10	-
51400AR/G	Grey	330x330mm	10	-



Multi System Modules

For Bases on page 167




11110R | 75W | R111 | G53 | Die cast

IP20 ADJUSTABLE

CE



Suitable for LED module.






11070R | 70W | PAR30 E27 | Die cast

IP20 ADJUSTABLE

QUICK FIX CE



Suitable for
PAR30 LED lamp.





11106R | 20W | E27 | Die cast

IP20 ADJUSTABLE

CE



Suitable for
LED & CFL lamp.



Order Code	Colour	Watts	Input	Class				Notes
11110R/W	White	75W	12V		25cm	80mm	45	-
11110R/G	Grey	75W	12V		25cm	80mm	45	-
11070R/G	Grey	70W	100-240V		40cm	160mm	20	-
11106R/W/1	White	20W	100-240V		-	180mm	20	Use LED or CFL lamp
11106R/G/1	Grey	20W	100-240V		-	180mm	20	Use LED or CFL lamp




Trimless Multi System Boxes

For Modules on page 170



51100TR | Trimless box | Metal








51200TR | Trimless box | Metal





Order Code	Colour	Watts	Input	Class				Notes
51100TR/W	White	-	-	-	164x164mm	200mm	8	-
51100TR/B	Black	-	-	-	164x164mm	200mm	8	-
51200TR/W	White	-	-	-	312x164mm	200mm	6	-
51200TR/B	Black	-	-	-	312x164mm	200mm	6	-

Trimless Multi System Modules

For Bases on page 169



51200TR/B + 11110TR/B

51100TR/B + 11150TR/B/38



11110TR | 75W | R111 | G53 | Die cast

IP20 ADJUSTABLE

CE



Suitable for LED lamps.





11150TR | 70W | HQI | G12 | Die cast

IP20 ADJUSTABLE

QUICK FIX CE



Suitable for 8010L LED lamp (Direct 230V).






11070TR | 70W | PAR30 E27 | Die cast

IP20 ADJUSTABLE

QUICK FIX CE



Order Code	Colour	Watts	Input	Class			Notes
11110TR/W	White	75W	12V	III	25cm	72	-
11110TR/B	Black	75W	12V	III	25cm	72	-
11150TR/W/38	White	70W	230V		30cm	36	Requires ballast 89070/ELE
11150TR/B/38	Black	70W	230V		30cm	36	Requires ballast 89070/ELE
11070TR/W	White	70W	100-240V		30cm	36	-



Aluminium R111 Round



11110AB/AL | 75W | R111 | G53 | Natural aluminium

IP20 ADJUSTABLE

CE





11110AB/W | 75W | R111 | G53 | Aluminium

IP20 ADJUSTABLE

CE





11110AB/B | 75W | R111 | G53 | Aluminium

IP20 ADJUSTABLE

CE



Order Code	Colour	Watts	Input	Class					Notes
11110AB/AL	Aluminium	75W	12V	III	40cm	150mm	75mm	20	-
11110AB/W	White	75W	12V	III	40cm	150mm	75mm	20	-
11110AB/B	Black	75W	12V	III	40cm	150mm	75mm	20	-



Aluminium R111 Square



51110AB/AL

51110AB | 75W | R111 | G53 | Aluminium

IP20


ADJUSTABLE



51110AB/W



51110AB/B





51210AB/AL

51210AB | 2x75W | R111 | G53 | Aluminium

IP20


ADJUSTABLE



51210AB/W



51210AB/B






51310AB | 3x75W | R111 | G53 | Natural aluminium

IP20

ADJUSTABLE



Order Code	Colour	Watts	Input	Class					Notes
51110AB/AL	Aluminium	75W	12V		40cm	150mm	75mm	20	-
51110AB/W	White	75W	12V		40cm	150mm	75mm	20	-
51110AB/B	Black	75W	12V		40cm	150mm	75mm	20	-
51210AB/AL	Aluminium	2x75W	12V		40cm	320x150mm	75mm	10	-
51210AB/W	White	2x75W	12V		40cm	320x150mm	75mm	10	-
51210AB/B	Black	2x75W	12V		40cm	320x150mm	75mm	10	-
51310AB/AL	Aluminium	3x75W	12V		40cm	495x150mm	75mm	10	-



11110GT4

11110GT1

51110GT1

Gypsum R111 Round



11110GT1 | 75W | R111 | G53 | Gypsum

IP20 ADJUSTABLE

CE





210mm



67mm





11110GT4 | 75W | R111 | G53 | Gypsum

IP20 ADJUSTABLE

CE






250mm



85mm



Order Code	Colour	Watts	Input	Class					Notes
11110GT1	White	75W	12V	III	25cm	212mm	170mm	6	-
11110GT4	White	75W	12V	III	25cm	251mm	180mm	6	-

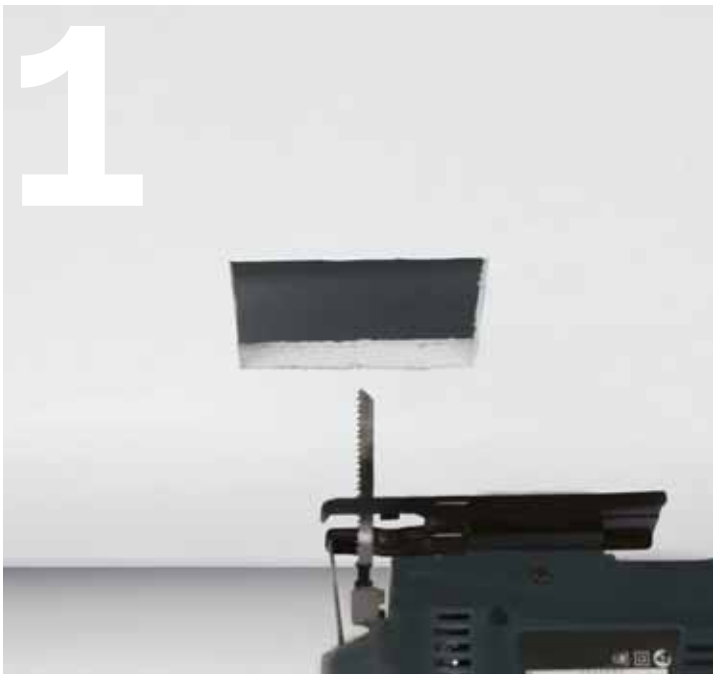








Gypsum R111 Square



51110GT1 | 75W | R111 | G53 | Gypsum

IP20 ADJUSTABLE





Order Code	Colour	Watts	Input	Class					Notes
51110GT1	White	75W	12V	III	25cm	212x212mm	170mm	6	-



Extractable G12

Die cast



11070S | 70W | HQI | G12 | Die cast

IP20 ADJUSTABLE

QUICK FIX CE



Suitable for 8010L
LED lamp (Direct 230V).





11150L | 150W | HQI | G12 | Die cast

IP20 ADJUSTABLE

QUICK FIX CE



Suitable for 8010L
LED lamp (Direct 230V).



Order Code	Colour	Watts	Input	Class					Notes
11070S/G/5	Grey	70W	230V		30cm	160mm	150mm	8	Requires ballast 89070/ELE
11150L/W/5	White	150W	230V		30cm	210mm	180mm	8	Requires ballast 89150/ELE



11070E/G/60

11150E/G/60

Extractable

Die cast



11110H | 75W | R111 | G53 | Die cast

IP20 ADJUSTABLE

CE



195mm



160mm





11070E | 70W | HQI | G8,5 | Die cast

IP20 ADJUSTABLE

QUICK FIX CE



152mm



135mm





11150E | 150W | HQI | G12 | Die cast

IP20 ADJUSTABLE

QUICK FIX CE



Suitable for 8010L
LED lamp (Direct 230V).



185mm



155mm





0712/20 | 0714/20 | 20° Reflectors for 11070E and 11150E

CE

0712/20 for 11070E
0714/20 for 11150E



Order Code	Colour	Watts	Input	Class	Beam Angle					Notes
11110H/W	White	75W	12V		-	15cm	185mm	110mm	8	-
11070E/G/60	Grey	70W	230V		60°	15cm	143mm	155mm	24	Requires ballast 89070/ELE
11150E/G/60	Grey	150W	230V		60°	15cm	176mm	175mm	18	Requires ballast 89150/ELE
11150E/MC/60	Brushed chrome	150W	230V		60°	15cm	176mm	175mm	18	Requires ballast 89150/ELE





08

Downlights Adjustable LED

Pages 179-200

COB LED | SMD LED | LED

Die cast | Natural aluminium | Trimless

IP20

ADJUSTABLE ADJUSTABLE DIMMABLE DARK LIGHT QUICK FIX 80 CRI 85 CRI








11130BT | 30W | COB LED | Trimlesss | Aluminium

IP20 80 CRI ADJUSTABLE

DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11130BT/W/C	White	Cool white	4000K	30W	2200lm	38°	700mA		40cm	110mm	160mm	12	Requires 700mA driver
11130BT/W/W	White	Warm white	3000K	30W	2200lm	38°	700mA		40cm	110mm	160mm	12	Requires 700mA driver



Adjustable Multi LED

Aluminium

11106LB | 6x1W | LED | Aluminium



IP20 ADJUSTABLE DIMMABLE QUICK FIX CE






11109L | 9x1W | LED | Natural aluminium



IP20 ADJUSTABLE DIMMABLE QUICK FIX CE






11112L | 12x1W | LED | Natural aluminium



IP20 ADJUSTABLE DIMMABLE QUICK FIX CE



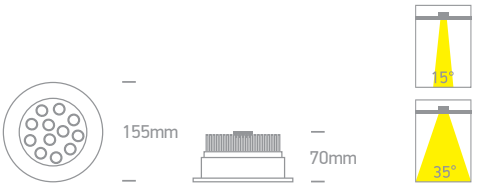

11118L | 18x1W | LED | Natural aluminium



IP20 ADJUSTABLE DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11106LB/D/35	Black	Daylight	6000K	6x1W	360lm	35°	350mA		40cm	90mm	50mm	50	Requires 350mA driver
11106LB/W/35	Black	Warm white	3000K	6x1W	270lm	35°	350mA		40cm	90mm	50mm	50	Requires 350mA driver
11109L/D/35	Aluminium	Daylight	6000K	9x1W	540lm	35°	350mA		40cm	110mm	80mm	30	Requires 350mA driver
11109L/W/35	Aluminium	Warm white	3000K	9x1W	405lm	35°	350mA		40cm	110mm	80mm	30	Requires 350mA driver
11112L/D/15	Aluminium	Daylight	6000K	12x1W	720lm	15°	350mA		40cm	140mm	80mm	30	Requires 350mA driver
11112L/D/35	Aluminium	Daylight	6000K	12x1W	720lm	35°	350mA		40cm	140mm	80mm	30	Requires 350mA driver
11112L/W/15	Aluminium	Warm white	3000K	12x1W	540lm	15°	350mA		40cm	140mm	80mm	30	Requires 350mA driver
11112L/W/35	Aluminium	Warm white	3000K	12x1W	540lm	35°	350mA		40cm	140mm	80mm	30	Requires 350mA driver
11118L/D/35	Aluminium	Daylight	6000K	18x1W	1080lm	35°	350mA		40cm	155mm	90mm	30	Requires 350mA driver
11118L/W/35	Aluminium	Warm white	3000K	18x1W	810lm	35°	350mA		40cm	155mm	90mm	30	Requires 350mA driver






11113V | 13W | LED | Natural aluminium

IP20 85 CRI

ADJUSTABLE CE



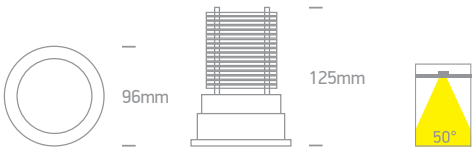




11126V | 26W | LED | Natural aluminium

IP20 85 CRI

ADJUSTABLE CE



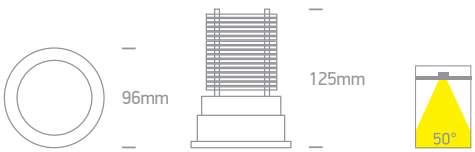

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11113V/AL/W	Aluminium	Warm white	3000K	13W	783lm	50°	230V	☐	81mm	140mm	32	Complete with driver
11126V/AL/W	Aluminium	Warm white	3000K	26W	1400lm	50°	230V	☐	81mm	140mm	32	Complete with driver






11118A | 18W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11118A/W/W	White	Warm white	3000K	18W	1120lm	35°	100-240V		110mm	150mm	12	Complete with driver



The COB Shop Range

Die cast



11138 | 38W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







51125 | 25W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







51138 | 38W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE








51225 | 2x25W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11138/W/C	White	Cool white	4000K	38W	2450lm	38°	100-240V	☐	150mm	160mm	12	Complete with driver
11138/W/W	White	Warm white	3000K	38W	2450lm	38°	100-240V	☐	150mm	160mm	12	Complete with driver
11138/G/C	Grey	Cool white	4000K	38W	2450lm	38°	100-240V	☐	150mm	160mm	12	Complete with driver
51125/W/W	White	Warm white	3000K	25W	1750lm	38°	100-240V	☐	130x130mm	160mm	12	Complete with driver
51125/G/C	Grey	Cool white	4000K	25W	1750lm	38°	100-240V	☐	130x130mm	160mm	12	Complete with driver
51138/W/C	White	Cool white	4000K	38W	2450lm	38°	100-240V	☐	170x170mm	200mm	8	Complete with drivers
51138/G/C	Grey	Cool white	4000K	38W	2450lm	38°	100-240V	☐	170x170mm	200mm	8	Complete with drivers
51225/W/C	White	Cool white	4000K	2x25W	2x1750lm	38°	100-240V	☐	220x125mm	160mm	8	Complete with drivers
51225/W/W	White	Warm white	3000K	2x25W	2x1750lm	38°	100-240V	☐	220x125mm	160mm	8	Complete with drivers
51225/G/C	Grey	Cool white	4000K	2x25W	2x1750lm	38°	100-240V	☐	220x125mm	160mm	8	Complete with drivers



The COB Box Type Shop Range

Aluminium




51120 | 20W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE



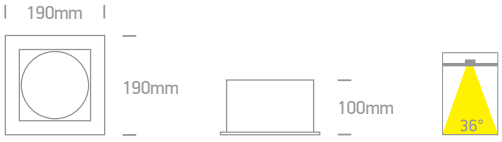




51220 | 2x20W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51120/W/W	White	Warm white	3000K	20W	1400lm	36°	230V	☐	165x165mm	140mm	12	Complete with driver
51120/G/C	Grey	Cool white	4000K	20W	1400lm	36°	230V	☐	165x165mm	140mm	12	Complete with driver
51120/G/W	Grey	Warm white	3000K	20W	1400lm	36°	230V	☐	165x165mm	140mm	12	Complete with driver
51220/W/C	White	Cool white	4000K	2x20W	2x1400lm	36°	230V	☐	330x165mm	140mm	8	Complete with drivers
51220/W/W	White	Warm white	3000K	2x20W	2x1400lm	36°	230V	☐	330x165mm	140mm	8	Complete with drivers
51220/G/C	Grey	Cool white	4000K	2x20W	2x1400lm	36°	230V	☐	330x165mm	140mm	8	Complete with drivers
51220/G/W	Grey	Warm white	3000K	2x20W	2x1400lm	36°	230V	☐	330x165mm	140mm	8	Complete with drivers



The COB Shop Downlights Pro

Die cast



11150A | 50W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE








51125A | 25W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







11125B | 25W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11150A/W/C	White	Cool white	4200K	50W	4450lm	40°	100-240V	☐	165mm	160mm	8	Complete with driver
11150A/W/W	White	Warm white	3000K	50W	3950lm	40°	100-240V	☐	165mm	160mm	8	Complete with driver
51125A/W/C	White	Cool white	4200K	25W	2700lm	40°	100-240V	☐	165x165mm	130mm	8	Complete with driver
51125A/W/W	White	Warm white	3000K	25W	2300lm	40°	100-240V	☐	165x165mm	130mm	8	Complete with driver
11125B/W/C	White	Cool white	4200K	25W	2450lm	35°	100-240V	☐	190mm	120mm	8	Complete with driver
11125B/W/W	White	Warm white	3000K	25W	2010lm	35°	100-240V	☐	190mm	120mm	8	Complete with driver



The COB Round Downlights

Die cast



11115B | 15W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







11120B | 20W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







11140B | 40W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE








11150B | 50W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11115B/W/W	White	Warm white	3000K	15W	1000lm	36°	230V	☐	90mm	100mm	36	Complete with driver
11120B/W/C	White	Cool white	4000K	20W	1600lm	36°	230V	☐	120mm	125mm	18	Complete with driver
11120B/W/W	White	Warm white	3000K	20W	1500lm	36°	230V	☐	120mm	125mm	18	Complete with driver
11140B/W/C	White	Cool white	4000K	40W	3300lm	36°	230V	☐	180mm	165mm	8	Complete with driver
11140B/W/W	White	Warm white	3000K	40W	3200lm	36°	230V	☐	180mm	165mm	8	Complete with driver
11150B/W/C	White	Cool white	4000K	50W	3850lm	40°	230V	☐	120mm	250mm	12	Complete with driver
11150B/W/W	White	Warm white	3000K	50W	3750lm	40°	230V	☐	120mm	250mm	12	Complete with driver



The COB Square Downlights

Die cast




51109B | 10W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







51120B | 20W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







51140B | 40W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51109B/W/W	White	Warm white	3000K	10W	700lm	36°	230V	☐	90x90mm	120mm	27	Complete with driver
51120B/W/C	White	Cool white	4000K	20W	1600lm	36°	230V	☐	125x125mm	160mm	12	Complete with driver
51120B/W/W	White	Warm white	3000K	20W	1500lm	36°	230V	☐	125x125mm	160mm	12	Complete with driver
51140B/W/C	White	Cool white	4000K	40W	3300lm	36°	230V	☐	170x170mm	160mm	8	Complete with driver
51140B/W/W	White	Warm white	3000K	40W	3200lm	36°	230V	☐	170x170mm	160mm	8	Complete with driver



The COB Square Downlights

Die cast



51209B | 2x10W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







51220B | 2x20W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







51240B | 2x40W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51209B/W/W	White	Warm white	3000K	2x10W	2x700lm	36°	230V	☐	180x90mm	130mm	18	Complete with drivers
51220B/W/C	White	Cool white	4000K	2x20W	2x1600lm	36°	230V	☐	225x125mm	170mm	8	Complete with drivers
51220B/W/W	White	Warm white	3000K	2x20W	2x1500lm	36°	230V	☐	225x125mm	170mm	8	Complete with drivers
51240B/W/C	White	Cool white	4000K	2x40W	2x3300lm	36°	230V	☐	320x165mm	170mm	4	Complete with drivers
51240B/W/W	White	Warm white	3000K	2x40W	2x3200lm	36°	230V	☐	320x165mm	170mm	4	Complete with drivers



11118TR/W/C



11118TR/G/C



11112TR/W/W

The COB Semi Trimless Range

Aluminium



11112TR | 12W | COB LED | Aluminium | Semi trimless

IP20 80 CRI

ADJUSTABLE DARK LIGHT CE








11118TR | 18W | COB LED | Aluminium | Semi trimless

IP20 80 CRI

ADJUSTABLE DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11112TR/W/W	White	Warm white	3000K	12W	890lm	35°	100-240V	☐	105mm	110mm	20	Complete with driver
11118TR/W/C	White	Cool white	4000K	18W	1300lm	35°	100-240V	☐	135mm	200mm	12	Complete with driver
11118TR/G/C	Grey	Cool white	4000K	18W	1300lm	35°	100-240V	☐	135mm	200mm	20	Complete with driver
11118TR/G/W	Grey	Warm white	3000K	18W	1120lm	35°	100-240V	☐	135mm	200mm	20	Complete with driver



The COB Semi Trimless Round

Die cast



11115TR | 15W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







11120TR | 20W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







11140TR | 40W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11115TR/W/W	White	Warm white	3000K	15W	1000lm	36°	230V	⧈	90mm	130mm	27	Complete with driver
11120TR/W/W	White	Warm white	3000K	20W	1500lm	36°	230V	⧈	120mm	150mm	12	Complete with driver
11140TR/W/W	White	Warm white	3000K	40W	3200lm	36°	230V	⧈	165mm	170mm	8	Complete with driver



The COB Semi Trimless Square

Die cast




51115TR | 15W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE








51120TR | 20W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE








51140TR | 40W | COB LED | Die cast


IP20 80 CRI

ADJUSTABLE CE



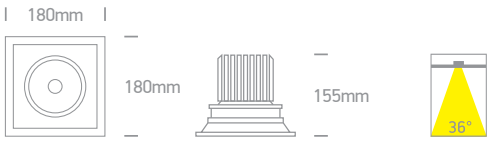

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51115TR/W/W	White	Warm white	3000K	15W	1000lm	36°	230V	☐	95x95mm	120mm	27	Complete with driver
51120TR/W/W	White	Warm white	3000K	20W	1500lm	36°	230V	☐	120x120mm	150mm	12	Complete with driver
51140TR/W/W	White	Warm white	3000K	40W	3200lm	36°	230V	☐	160x160mm	180mm	8	Complete with driver

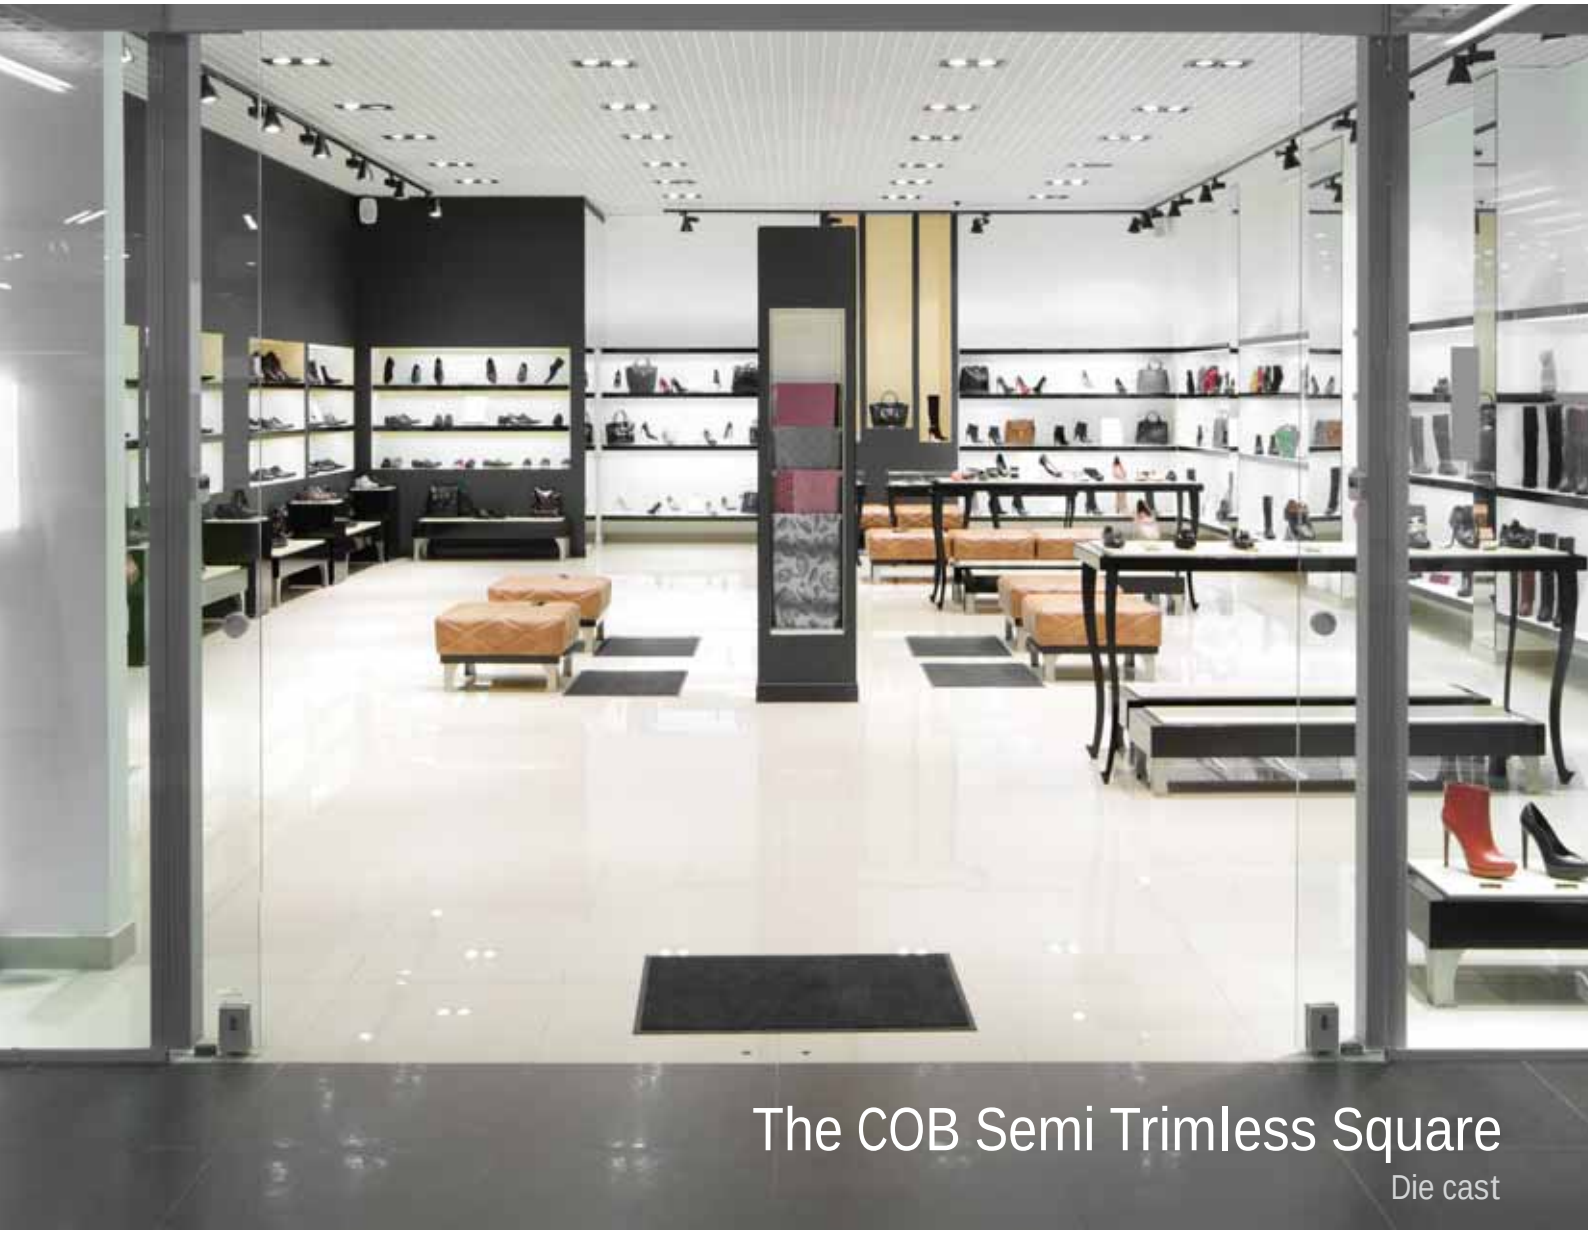

The COB Semi Trimless Square

Die cast



51215TR | 2x15W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE







51220TR | 2x20W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51215TR/W/W	White	Warm white	3000K	2x15W	2x1000lm	36°	230V	☐	185x95mm	120mm	18	Complete with drivers
51220TR/W/W	White	Warm white	3000K	2x20W	2x1500lm	36°	230V	☐	230x120mm	150mm	6	Complete with drivers



The COB Retro Downlights

Aluminium




11115C | 15W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE








11120C | 20W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE








11130C | 30W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11115C/W/C	White	Cool white	4000K	15W	1200lm	38°	230V	☐	95mm	100mm	30	Complete with driver
11115C/W/W	White	Warm white	3000K	15W	1100lm	38°	230V	☐	95mm	100mm	30	Complete with driver
11120C/W/C	White	Cool white	4000K	20W	1600lm	38°	230V	☐	125mm	100mm	30	Complete with driver
11120C/W/W	White	Warm white	3000K	20W	1500lm	38°	230V	☐	125mm	100mm	30	Complete with driver
11130C/W/C	White	Cool white	4000K	30W	2200lm	38°	230V	☐	145mm	110mm	18	Complete with driver
11130C/W/W	White	Warm white	3000K	30W	2100lm	38°	230V	☐	145mm	110mm	18	Complete with driver



The SMD Classic Rectangle

Die cast



51145 | 45W | SMD LED | Die cast

IP20 80 CRI

ADJUSTABLE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51145/W/C	White	Cool white	4000K	45W	3500lm	95°	230V		210x130mm	150mm	4	Complete with driver
51145/W/W	White	Warm white	3000K	45W	3500lm	95°	230V		210x130mm	150mm	4	Complete with driver



11107E/W/W

11115E/W/W

The COB Pop Up Range

Die cast



11107E | 7W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE








11115E | 15W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107E/W/W	White	Warm white	3000K	7W	519lm	38°	700mA		30cm	95mm	50mm	20	Requires 700mA driver
11115E/W/W	White	Warm white	3000K	15W	1114lm	38°	350mA		30cm	135mm	65mm	25	Requires 350mA driver



The COB Pop Out Range

Aluminium




11107R | 7W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE










11114R | 14W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE










11125R | 25W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107R/W/C	White	Cool white	4000K	7W	600lm	38°	350mA	III	40cm	100mm	70mm	12	Requires 350mA driver
11107R/W/W	White	Warm white	3000K	7W	548lm	38°	350mA	III	40cm	100mm	70mm	12	Requires 350mA driver
11114R/W/C	White	Cool white	4000K	14W	1100lm	36°	700mA	III	40cm	130mm	85mm	12	Requires 700mA driver
11114R/W/W	White	Warm white	3000K	14W	1037lm	36°	700mA	III	40cm	130mm	85mm	12	Requires 700mA driver
11125R/W/C	White	Cool white	4000K	25W	2200lm	40°	700mA	III	40cm	160mm	85mm	8	Requires 700mA driver
11125R/W/W	White	Warm white	3000K	25W	2070lm	40°	700mA	III	40cm	160mm	85mm	8	Requires 700mA driver





11118H | 18W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE







11115F | 15W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







11125F | 25W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11118H/W/C	White	Cool white	4000K	18W	1300lm	35°	100-240V	☐	120mm	110mm	20	Complete with driver
11118H/W/W	White	Warm white	3000K	18W	1120lm	35°	100-240V	☐	120mm	110mm	20	Complete with driver
11118H/G/C	Grey	Cool white	4000K	18W	1300lm	35°	100-240V	☐	120mm	110mm	20	Complete with driver
11118H/G/W	Grey	Warm white	3000K	18W	1120lm	35°	100-240V	☐	120mm	110mm	20	Complete with driver
11115F/W/C	White	Cool white	4000K	15W	1100lm	60°	230V	☐	145mm	155mm	18	Complete with driver
11115F/W/W	White	Warm white	3000K	15W	1100lm	60°	230V	☐	145mm	155mm	18	Complete with driver
11125F/W/C	White	Cool white	4000K	25W	1900lm	60°	230V	☐	172mm	170mm	12	Complete with driver
11125F/W/W	White	Warm white	3000K	25W	1900lm	60°	230V	☐	172mm	170mm	12	Complete with driver



The COB Extractable Range



11110F | 10W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







11112F | 12W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE DIMMABLE QUICK FIX CE







11120F | 20W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







11130F | 30W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11110F/W/C	White	Cool white	4000K	10W	800lm	36°	230V	□	-	90mm	105mm	36	Complete with driver
11110F/W/W	White	Warm white	3000K	10W	770lm	36°	230V	□	-	90mm	105mm	36	Complete with driver
11112F/W/C	White	Cool white	4000K	12W	1100lm	50°	700mA	III	40cm	102mm	120mm	36	Requires 700mA driver
11112F/W/W	White	Warm white	3000K	12W	1100lm	50°	700mA	III	40cm	102mm	120mm	36	Requires 700mA driver
11120F/W/C	White	Cool white	4000K	20W	1600lm	36°	230V	□	-	125mm	130mm	18	Complete with driver
11120F/W/W	White	Warm white	3000K	20W	1500lm	36°	230V	□	-	125mm	130mm	18	Complete with driver
11130F/W/C	White	Cool white	4000K	30W	2200lm	55°	230V	□	-	145mm	150mm	12	Complete with driver
11130F/W/W	White	Warm white	3000K	30W	2100lm	55°	230V	□	-	145mm	150mm	12	Complete with driver



The COB Recessed Spots

Die cast




11135L | 35W | COB LED | Die cast

Matching design with 65624T.

IP20 80 CRI

ADJUSTABLE CE









11130B | 30W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE



15° Reflector for 11130B.
Order code 0736/15.








11140L | 40W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11135L/W/C	White	Cool white	4000K	35W	3050lm	45°	230V		145mm	110mm	18	Complete with driver
11135L/W/W	White	Warm white	3000K	35W	2950lm	45°	230V		145mm	110mm	18	Complete with driver
11130B/W/C	White	Cool white	4000K	30W	2300lm	36°	230V		100mm	70mm	9	Complete with driver
11130B/W/W	White	Warm white	3000K	30W	2200lm	36°	230V		100mm	70mm	9	Complete with driver
11140L/W/C	White	Cool white	4000K	40W	3200lm	36°	230V		100mm	70mm	12	Complete with driver
11140L/W/W	White	Warm white	3000K	40W	3100lm	36°	230V		100mm	70mm	12	Complete with driver





11107RA | 7W | COB LED | Aluminium

IP20 90 CRI ADJUSTABLE
DIMMABLE QUICK FIX DARK LIGHT CE










11110B | 10W | COB LED | Die cast

IP20 80 CRI ADJUSTABLE
DARK LIGHT CE










11115RA | 15W | COB LED | Die cast

IP20 80 CRI ADJUSTABLE
DARK LIGHT CE










11125RA | 25W | COB LED | Die cast

IP20 80 CRI ADJUSTABLE
DARK LIGHT CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11107RA/W/W	White	Warm white	3000K	7W	500lm	36°	700mA		40cm	45mm	40mm	36	Requires 700mA driver
11110B/W/C	White	Cool white	4000K	10W	750lm	40°	230V		-	120mm	90mm	12	Complete with driver
11110B/W/W	White	Warm white	3000K	10W	750lm	40°	230V		-	120mm	90mm	12	Complete with driver
11115RA/W/C	White	Cool white	4000K	15W	1100lm	36°	230V		-	90mm	70mm	24	Complete with driver
11115RA/W/W	White	Warm white	3000K	15W	1050lm	36°	230V		-	90mm	70mm	24	Complete with driver
11125RA/W/C	White	Cool white	4000K	25W	1900lm	36°	230V		-	120mm	80mm	12	Complete with driver
11125RA/W/W	White	Warm white	3000K	25W	1800lm	36°	230V		-	120mm	80mm	12	Complete with driver





09

LED Strips & Profiles

Pages 203-236

SMD LED | LED

12V DC | 24V DC

IP20 IP54 IP65 IP67 IP68

DIMMABLE QUICK FIX 75 CRI 80 CRI 85 CRI 95 CRI





LED Modules



7840 | 0,72W (3LEDs x 0,24W)


Double face adhesive.

IP65

DIMMABLE



Supplied in 10pcs chain.
Total length 1,7m.





7842 | 1,44W (4LEDs x 0,36W)


Double face adhesive.

IP65

DIMMABLE



Supplied in 10pcs chain.
Total length 1,25m.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7840/D	Daylight	6000K	0,72W	48lm	12V DC	III	100	Requires 12V DC driver
7840/Y	Yellow	-	0,72W	-	12V DC	III	100	Requires 12V DC driver
7842/D	Daylight	6000K	1,44W	64lm	12V DC	III	100	Requires 12V DC driver
7842/BL	Blue	-	1,44W	-	12V DC	III	100	Requires 12V DC driver
7842/GR	Green	-	1,44W	-	12V DC	III	100	Requires 12V DC driver
7842/R	Red	-	1,44W	-	12V DC	III	100	Requires 12V DC driver
7842/Y	Yellow	-	1,44W	-	12V DC	III	100	Requires 12V DC driver



The 9,6W/m Ultra Slim 24V

5mm SMD 3528 120LEDs/m



Ultra thin

7823 | 9,6W/m | SMD 3528 | 120LEDs/m

3M Double face adhesive.

IP20

80 CRI

DIMMABLE



Supplied in 5m roll.



Dimming remote control.
Order code 20030.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7823/C	Cool white	4000K	9,6W/m	800lm/m	24V DC	III	40	Requires 24V DC driver
7823/W	Warm white	3000K	9,6W/m	770lm/m	24V DC	III	40	Requires 24V DC driver
7823/EW	Extra warm white	2700K	9,6W/m	720lm/m	24V DC	III	40	Requires 24V DC driver





7821 | 4,8W/m | SMD 3528 | 60LEDs/m

3M Double face adhesive.

IP20 | 75 CRI | DIMMABLE | CE



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





7831 | 14,4W/m | SMD 5050 | 60LEDs/m

3M Double face adhesive.

IP20 | 75 CRI | DIMMABLE | CE




Supplied in 5m roll.



Dimming remote control.
Order code 20030.



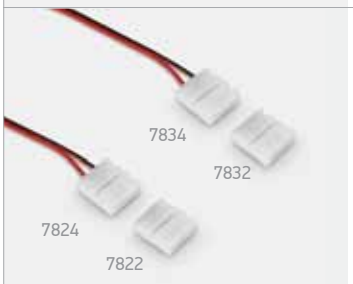

Accessories for 7821 & 7831

III | 50cm | CE

7821

7824 Power supply cable
7822 Connector

7831

7834 Power supply cable
7832 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7821/D	Daylight	6000K	4,8W/m	360lm/m	12V DC	III	40	Requires 12V DC driver
7831/C	Cool white	4000K	14,4W/m	1050lm/m	12V DC	III	40	Requires 12V DC driver



7831W/W

The Outdoor Range 12V



7821W | 4,8W/m | SMD 3528 | 60LEDs/m | Silicone — NO adhesive.

IP68 | 75 CRI | DIMMABLE | CE



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





7831W | 14,4W/m | SMD 5050 | 60LEDs/m | Silicone — 3M Double face adhesive.

IP68 | 75 CRI | DIMMABLE | CE



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





7826 | Mounting clip for 7821W

7827 | Mounting clip for 7831W

CE

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7821W/W	Warm white	3000K	4,8W/m	280lm/m	12V DC	III	40	Requires 12V DC driver / Avoid direct sunlight
7831W/W	Warm white	3000K	14,4W/m	860lm/m	12V DC	III	40	Requires 12V DC driver / Avoid direct sunlight



The 4,8W/m Indoor 24V

8mm SMD 3528 60LEDs/m



7820 | 4,8W/m | SMD 3528 | 60LEDs/m

3M Double face adhesive.

IP20

80 CRI

DIMMABLE




Supplied in 5m roll.



Dimming remote control.
Order code 20030.

Cut every 10cm
(6-LED segment)

8mm

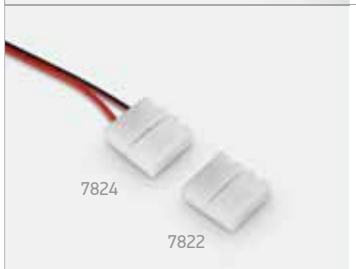

Accessories for 7820

50cm

7824 Power supply cable

7822 Connector

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820/D	Daylight	6000K	4,8W/m	360lm/m	24V DC	III	40	Requires 24V DC driver
7820/C	Cool white	4000K	4,8W/m	350lm/m	24V DC	III	40	Requires 24V DC driver
7820/W	Warm white	3000K	4,8W/m	340lm/m	24V DC	III	40	Requires 24V DC driver
7820/EW	Extra warm white	2700K	4,8W/m	320lm/m	24V DC	III	40	Requires 24V DC driver
7820/BL	Blue	-	4,8W/m	-	24V DC	III	40	Requires 24V DC driver



The 4,8W/m Outdoor 24V

12mm SMD 3528 60LEDs/m



7820W | 4,8W/m | SMD 3528 | 60LEDs/m | Silicone — 3M Double face adhesive.

IP68 · 80 CRI · DIMMABLE · CE



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





7820AW | 4,8W/m | SMD 3528 | 60LEDs/m | Silicone — NO adhesive.

IP68 · 80 CRI · DIMMABLE · CE



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





Accessories for 7820W & 7820AW


CE

7826 Mounting clip
7828 End cup

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7820W/D	Daylight	6000K	4,8W/m	320lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/C	Cool white	4000K	4,8W/m	300lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/W	Warm white	3000K	4,8W/m	280lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/EW	Extra warm white	2700K	4,8W/m	280lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820W/BL	Blue	-	4,8W/m	-	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7820AW/W	Warm white	3000K	4,8W/m	280lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight

The 14,4W/m & 17,6W/m Indoor 24V

SMD 5050 60LEDs/m

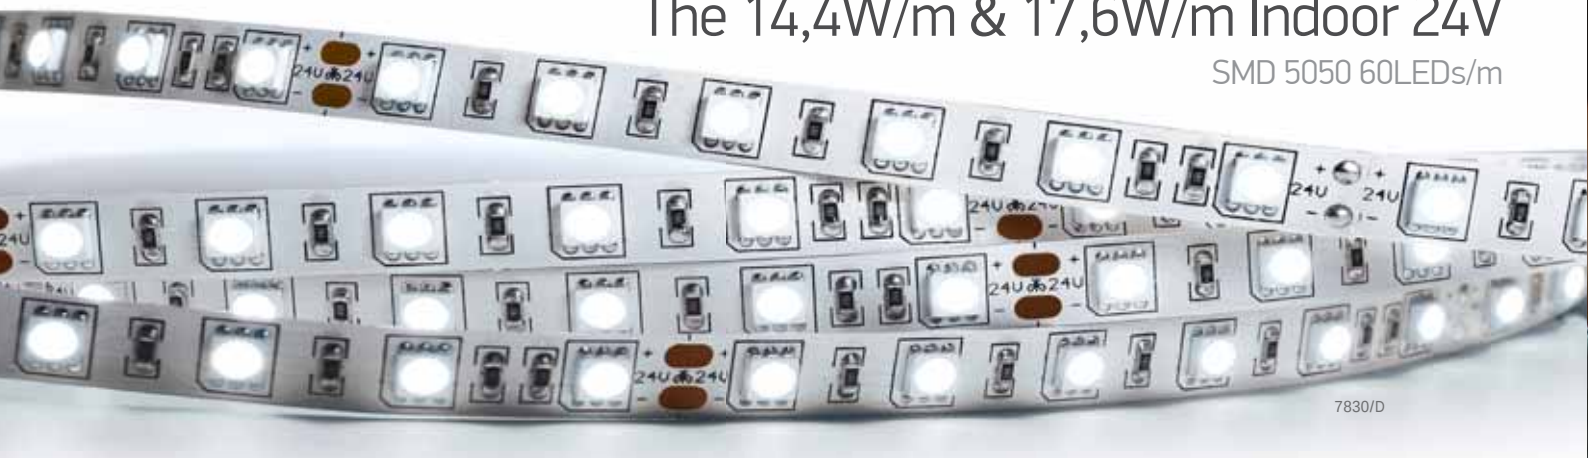



7830 | 14,4W/m | SMD 5050 | 60LEDs/m

3M Double face adhesive.

IP20 · 80 CRI · DIMMABLE · CE



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





7830/RGB | 14,4W/m | SMD 5050 | 60LEDs/m

3M Double face adhesive.

IP20 · DIMMABLE · CE



Supplied in 5m roll.



RGB Remote control.
Order code 20034.





Accessories for 7830 & 7830/RGB

III · 50cm · CE

7830

7834 Power supply cable
7832 Connector

7830/RGB

7834/RGB Power supply cable
7832/RGB Connector



7830/RGBW | 17,6W/m | SMD 5050 | 60LEDs/m

3M Double face adhesive.


IP20 · DIMMABLE · CE



Supplied in 5m roll.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7830/D	Daylight	6000K	14,4W/m	1100lm/m	24V DC	III	40	Requires 24V DC driver
7830/C	Cool white	4000K	14,4W/m	1050lm/m	24V DC	III	40	Requires 24V DC driver
7830/W	Warm white	3000K	14,4W/m	1000lm/m	24V DC	III	40	Requires 24V DC driver
7830/EW	Extra warm white	2700K	14,4W/m	980lm/m	24V DC	III	40	Requires 24V DC driver
7830/RGB	RGB	-	14,4W/m	-	24V DC	III	40	Requires 24V DC driver
7830/RGBW	RGB + Warm white	RGB + 3000K	RGB 13,2W/m + WW 4,4W/m	-	24V DC	III	40	Requires 24V DC driver

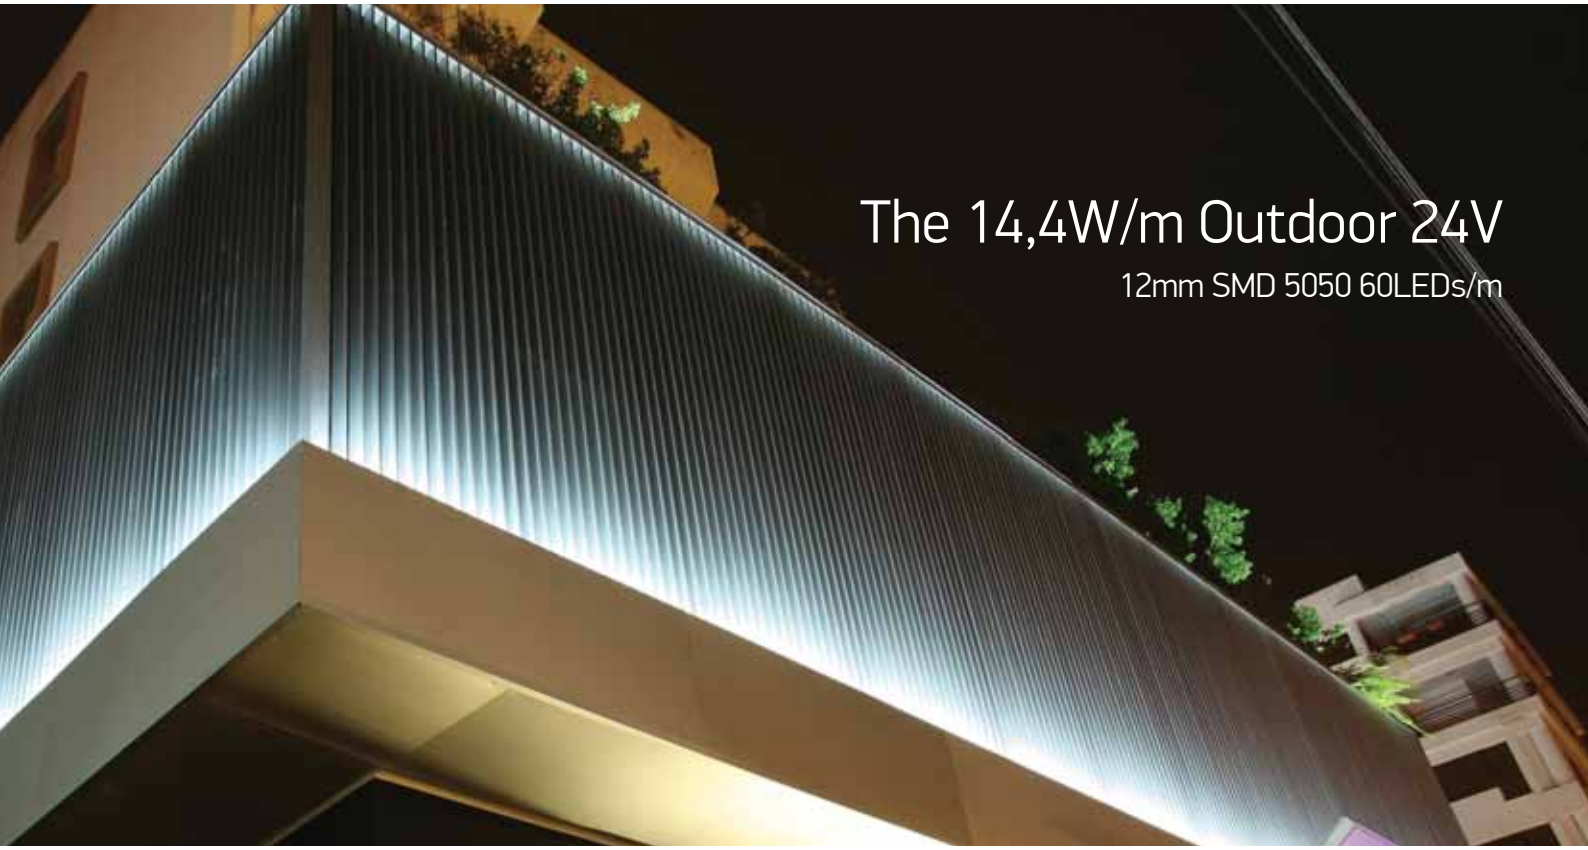

The 14,4W/m Outdoor 24V

12mm SMD 5050 60LEDs/m



7830W | 14,4W/m | SMD 5050 | 60LEDs/m | Silicone

3M Double face adhesive.

IP68 80 CRI DIMMABLE CE



Supplied in 5m roll.



Dimming remote control.
Order code 20030.

Cut every 10cm
(6-LED segment)

12mm



7830W/RGB | 14,4W/m | SMD 5050 | 60LEDs/m | Silicone

3M Double face adhesive.

IP68 DIMMABLE CE



Supplied in 5m roll.



RGB Remote control.
Order code 20034.

Cut every 10cm
(6-LED segment)

12mm



7827 | Mounting clip for 7830W

CE

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7830W/D	Daylight	6000K	14,4W/m	900lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7830W/W	Warm white	3000K	14,4W/m	860lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7830W/EW	Extra warm white	2700K	14,4W/m	840lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7830W/RGB	RGB	-	14,4W/m	-	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight



The 14,4W/m & 20W/m Indoor 24V

10mm SMD 2835 60LEDs/m & 120LEDs/m



7835 | 14,4W/m | SMD 2835 | 60LEDs/m

3M Double face adhesive.

IP20 | 80 CRI | DIMMABLE | CE



Supplied in 5m roll.



Dimming remote control.
Order code 20030.

Cut every 10cm (6-LED segment)

10mm



7835C | 14,4W/m | SMD 2835 | 60LEDs/m

3M Double face adhesive.

IP20 | 95 CRI | DIMMABLE | CE



Supplied in 5m roll.



Dimming remote control.
Order code 20030.

Cut every 10cm (6-LED segment)

10mm



Accessories for 7835 & 7835C

III | 50cm | CE

7835P Power supply cable

7837 Connector



7825 | 20W/m | SMD 2835 | 120LEDs/m

3M Double face adhesive.

IP20 | 80 CRI | DIMMABLE | CE



Supplied in 5m roll.



Dimming remote control.
Order code 20030.

Cut every 5cm (6-LED segment)

10mm

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835/D	Daylight	6000K	14,4W/m	1130lm/m	24V DC	III	40	Requires 24V DC driver
7835/C	Cool white	4000K	14,4W/m	1130lm/m	24V DC	III	40	Requires 24V DC driver
7835/W	Warm white	3000K	14,4W/m	1060lm/m	24V DC	III	40	Requires 24V DC driver
7835/EW	Extra warm white	2700K	14,4W/m	1060lm/m	24V DC	III	40	Requires 24V DC driver
7835C/C	Cool white	4000K	14,4W/m	1000lm/m	24V DC	III	40	Requires 24V DC driver
7835C/W	Warm white	3000K	14,4W/m	950lm/m	24V DC	III	40	Requires 24V DC driver
7825/C	Cool white	4000K	20W/m	2000lm/m	24V DC	III	40	Requires 24V DC driver
7825/W	Warm white	3000K	20W/m	1900lm/m	24V DC	III	40	Requires 24V DC driver
7825/EW	Extra warm white	2700K	19,2W/m	1344lm/m	24V DC	III	40	Requires 24V DC driver



The 14,4W/m Outdoor 24V

12mm SMD 2835 60LEDs/m



7835W | 14,4W/m | SMD 2835 | 60LEDs/m | Silicone

3M Double face adhesive.

IP68

80 CRI

DIMMABLE



Supplied in 5m roll.



Dimming remote control.
Order code 20030.

Cut every 10cm
(6-LED segment)

12mm

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7835W/D	Daylight	6000K	14,4W/m	1030lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/C	Cool white	4000K	14,4W/m	1030lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/W	Warm white	3000K	14,4W/m	980lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight
7835W/EW	Extra warm white	2700K	14,4W/m	980lm/m	24V DC	III	40	Requires 24V DC driver / Avoid direct sunlight



The 24W/m &19,2W/m Indoor 24V

10mm & 16mm



7845 | 24W/m | SMD 2216 | 300LEDs/m

No shadow / 3M Double face adhesive.

IP20 | 90 CRI | DIMMABLE | CE



Supplied in 5m roll.



Dimming remote control.
Order code 20030.

Cut every 2cm (6-LED segment)

10mm



7870 | 19,2W/m | SMD 3528 | 240LEDs/m

No shadow / 3M Double face adhesive.

IP20 | 80 CRI | DIMMABLE | CE



Supplied in 5m roll.



Dimming remote control.
Order code 20030.

Cut every 2,5cm (6-LED segment)

10mm



7875 | 19,2W/m | SMD 3528 | 240LEDs/m

3M Double face adhesive.

IP20 | 80 CRI | DIMMABLE | CE



Supplied in 5m roll.




Dimming remote control.
Order code 20030.

Cut every 5cm (12-LED segment)


16mm

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7845/C	Cool white	4000K	24W/m	1900lm/m	24V DC	III	40	Requires 24V DC driver
7845/W	Warm white	3000K	24W/m	1800lm/m	24V DC	III	40	Requires 24V DC driver
7845/EW	Extra warm white	2700K	24W/m	1750lm/m	24V DC	III	40	Requires 24V DC driver
7870/D	Daylight	6000K	19,2W/m	1400lm/m	24V DC	III	40	Requires 24V DC driver
7870/C	Cool white	4000K	19,2W/m	1300lm/m	24V DC	III	40	Requires 24V DC driver
7870/W	Warm white	3000K	19,2W/m	1300lm/m	24V DC	III	40	Requires 24V DC driver
7875/D	Daylight	6000K	19,2W/m	1400lm/m	24V DC	III	40	Requires 24V DC driver
7875/C	Cool white	4000K	19,2W/m	1300lm/m	24V DC	III	40	Requires 24V DC driver
7875/W	Warm white	3000K	19,2W/m	1250lm/m	24V DC	III	40	Requires 24V DC driver

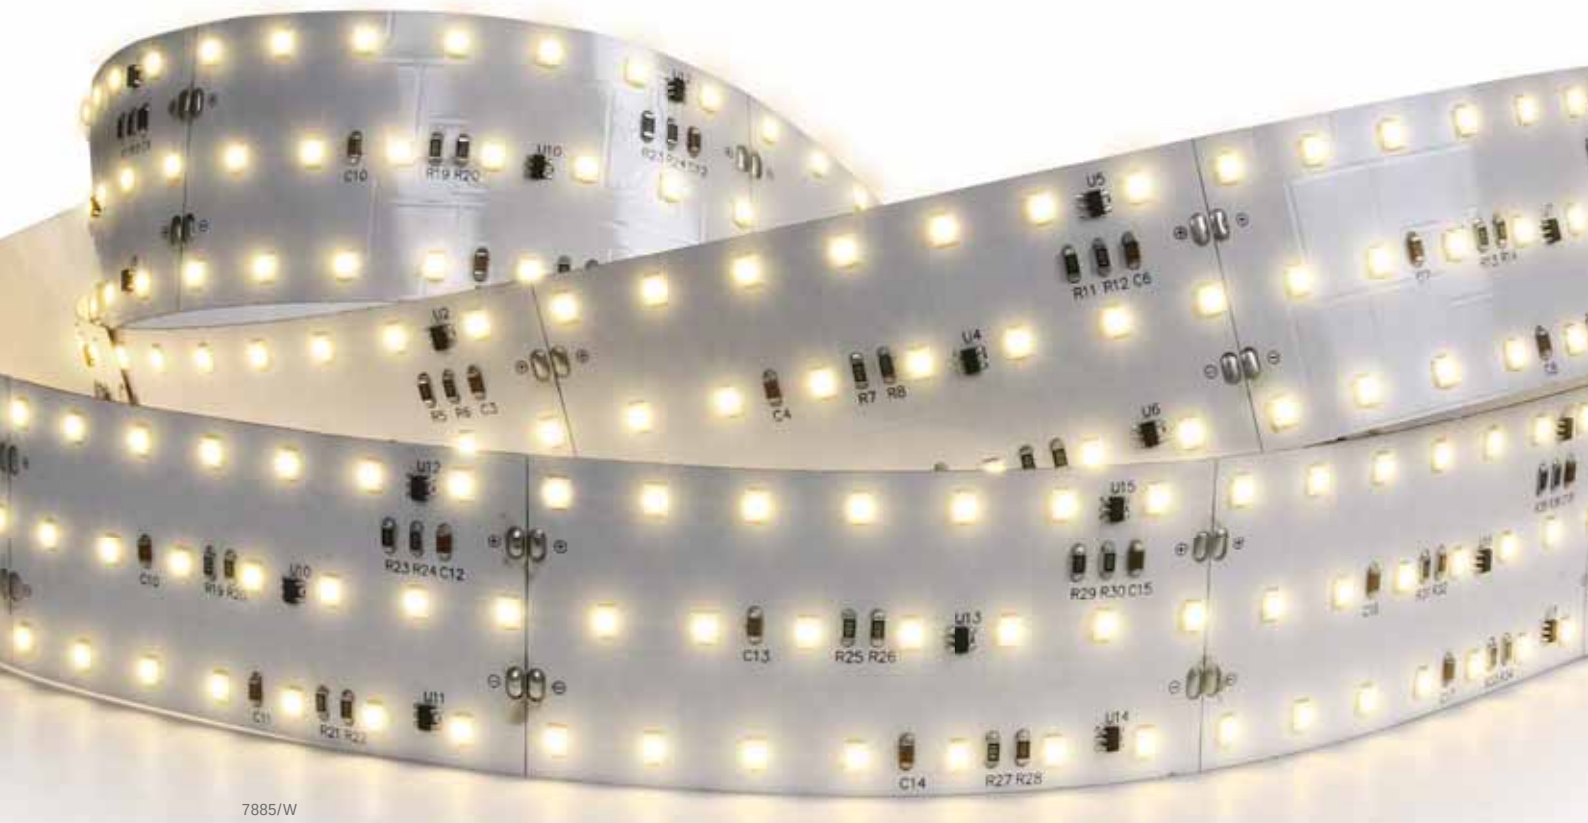

The High Power Wide Strips 24V

20mm & 39mm

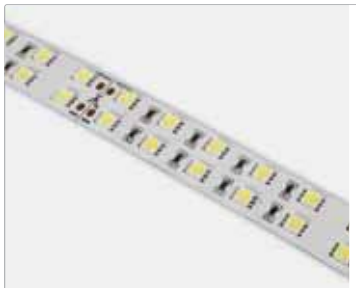

7880 | 28,8W/m | SMD 5050 | 120LEDs/m — 3M Double face adhesive.

IP20 · 80 CRI · DIMMABLE · CE



Supplied in 5m roll.



Dimming remote control.
Order code 20030.





7885 | 46W/m | SMD 2835 | 252LEDs/m — 3M Double face adhesive.


IP20 · 80 CRI · DIMMABLE · CE



Supplied in 2m roll.



Dimming remote control.
Order code 20030.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7880/D	Daylight	6000K	28,8W/m	1950lm/m	24V DC	III	40	Requires 24V DC driver
7880/C	Cool white	4000K	28,8W/m	1850lm/m	24V DC	III	40	Requires 24V DC driver
7880/W	Warm white	3000K	28,8W/m	1800lm/m	24V DC	III	40	Requires 24V DC driver
7885/C	Cool white	4000K	46W/m	4830lm/m	24V DC	III	40	Requires 24V DC driver
7885/W	Warm white	3000K	46W/m	4600lm/m	24V DC	III	40	Requires 24V DC driver





7830/DW | 20W/m | SMD 2835 | 120LEDs/m

3M Double face adhesive.

IP20 | 80 CRI | DIMMABLE | CE










20032 | 12-24V DC | Variable colour temperature controller & dimmer | 2 channels x 3A

IP20 | DIMMABLE | CE

Remote controller for changing colour temperature from daylight to warm white. Suitable for use with LED strips 7830/DW.
50 meters range, includes dimmer control and programme mode.

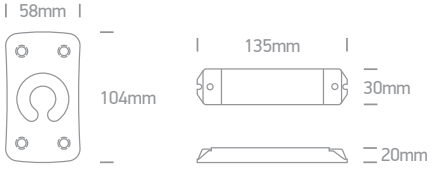

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7830/DW	Daylight + Warm white	6000K + 3000K	20W/m	2000lm/m both CCT on	24V DC	III	40	Requires 24V DC driver



LED Strips Complete Sets



7820A/RGB | 7,2W/m | SMD 5050 | 30LEDs/m

IP20

DIMMABLE

10mm



RGB+W

7830A/RGBW | 3W/m/color | SMD 5050 | 30LEDs/m

3M Double face adhesive.

IP20

80 CRI

DIMMABLE



Supplied in 5m roll.

12mm



7820C/A | 2,16W/m | SMD 3528 | Sensor

3M Double face adhesive.



- Night time bed light.
- Set of 2x1,2m pcs.
- Switches ON when you step out of bed.

Order Code	Light Colour	CCT (K)	Watts	Input	Class		Notes
7820A/RGB	RGB	-	7,2W/m	230V / 24V DC	☐	12	Set 5m RGB LED strip, LED driver, controller, remote
7830A/RGBW	RGB + Warm white	RGB + 3000K	3W/m/color	100-240V / 12V DC	☐	12	Set of LED strip + remote
7820C/A	Amber	1700K	2,16W/m	100-240V / 12V DC	☐	20	Set of LED strips + sensors



Surface Slim Profiles




7901/AL | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7823 LED Strips 5mm

4

CE



Complete with 2 pairs end cups & 6pcs metal fixing clips.





7836/G

7836 | 2m Square profile | Aluminium | Suitable for 7820, 7821, 7830, 7831 & 7870 LED Strips

CE




7836/W



2m Diffuser. Order code 7836A/C Clear & 7836A/P Opal.



Complete with 4 pairs end cups, 4 connectors & 6pcs fixing clips.





7902/W

7902 | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7821 LED Strips


CE



7902/AL



Complete with 2 pairs end cups & 6pcs fixing clips.





7904/W

7904 | 2m Surface profile + PC opal diffuser | Aluminium | Suitable for 7820, 7821, 7825, 7830, 7831 & 7835 LED Strips


CE



7904/AL



Complete with 2 pairs end cups & 6pcs fixing clips.






7918/W | 2m White profile + PMMA opal diffuser | Plastic | Suitable for 7820 & 7821 LED Strips

IP68

CE



Complete with 2 pairs end cups & 6pcs fixing clips.





Surface/Suspended Wide Profiles



7912/AL | 2m Surface/Suspended profile + PC opal diffuser | Aluminium | Suitable for 7825, 7875 & 7880 LED Strips



Complete with 2 pairs end cups.


Optional Trimless kit (10pcs). Order code 7838M.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.





7910/AL | 2m Surface/Suspended profile + PC opal diffuser | Aluminium | Suitable for 7825, 7875 & 7880 LED Strips

Use drivers on page 533



Complete with 2 pairs end cups.


Optional Trimless kit (10pcs). Order code 7838M.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.





7910A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium | Suitable for 7885 LED Strips 45mm

Use drivers on page 533



Complete with 2 pairs end cups.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.

6





7912A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium | Suitable for 7880 & 7885 LED Strips 40mm


Complete with 2 pairs end cups.



Optional Trimless kit (10pcs). Order code 7838M.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.


Optional 90° connector. Order code 7900R.

6





Triangular Profiles




7908A/AL | 2m Triangle profile + PC opal diffuser | Aluminium
Suitable for 7820, 7823, 7830, 7835 & 7835C LED Strips 10mm

60

CE



Complete with 2 pairs end cups & 6pcs surface mounting clips.






7908B/AL | 2m Triangle profile + PMMA opal diffuser | Aluminium
Suitable for 7820, 7823, 7830, 7835 & 7835C LED Strips 10mm

60

CE



Complete with 2 pairs end cups & 6pcs surface mounting clips.





7836T/G

7836T | 2m Triangle profile for 7820, 7821, 7830, 7831 & 7870 | Aluminium

CE




7836T/W



2m Opal diffuser.
Order code 7836B/P.



Complete with 4 pairs end cups & 4 connectors.






7908/AL | 2m Triangle profile + PC opal diffuser | Aluminium
Suitable for 7820, 7821, 7825, 7830, 7831, 7835, 7870, 7875, 7820W, 7830W, 7831W & 7835W LED Strips

CE



Complete with 2 pairs end cups & 1pc 180° connector.






Side Light Surface & Suspended Profiles



7906/AL | 2m Surface profile + PMMA opal square diffuser | Aluminium
Suitable for 7820, 7821, 7825, 7830, 7831, 7835, 7820W, 7830W, 7831W & 7835W LED Strips


Complete with 2 pairs end cups.






7906A/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium
Suitable for 7820, 7825, 7830, 7835, 7835C, 7875 & 7870 LED Strips 16mm

12


Complete with 2 pairs end cups & 6pcs surface mounting clips.


Optional suspension wire (1pc). Order code 7900P.


Optional 180° connector. Order code 7900C.






7906B/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium | Suitable for 7875 & 7880 LED Strips 30mm

16


Complete with 2 pairs end cups & 6pcs surface mounting clips.


Optional suspension wire (1pc). Order code 7900P.






7906C/AL | 2m Surface / Suspended profile + PC opal diffuser | Aluminium | Suitable for 7875 & 7880 LED Strips 30mm
Use drivers on page 533

8


Complete with 2 pairs end cups.


Optional suspension wire (1pc). Order code 7900P.






7906D/AL | 2m Surface/Suspended profile + PC opal diffuser | Aluminium | Suitable for 7885 LED Strips 40mm
Use drivers on page 533

6


Complete with 2 pairs end cups.


Optional suspension wire (1pc). Order code 7900P.




Up/Down Light Wall Profile



7916/AL | 2m Wall mounted profile + PC opal diffuser | Aluminium | Suitable for 7825, 7875 & 7880 LED Strips
Use drivers on page 533



Complete with
2 pairs end cups &
5pcs fixing clips.



Recessed Profiles



7902R/AL

7902R | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820 & 7821 LED Strips




7902R/W



Complete with 2 pairs end cups.

18x2000mm

10mm





7904R/AL

7904R | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7820, 7821, 7825, 7830, 7831 & 7835 LED Strips




7904R/W



Complete with 2 pairs end cups.

18x2000mm

16mm





7906R/AL

7906R | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7825, 7830, 7835, 7835C, 7845, 7870 & 7875 LED Strips 20mm

60




7906R/W



Complete with 2 pairs end cups.

25x2000mm






7912R/AL | 2m Recessed profile + PC opal diffuser | Aluminium
Suitable for 7820, 7821, 7825, 7830, 7831, 7835, 7870, 7875, 7820W, 7830W, 7831W & 7835W LED Strips



Complete with 2 pairs end cups & 6pcs fixing clips.

25x2000mm

50mm






7910R/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7825, 7875 & 7880 LED Strips



Complete with 2 pairs end cups & 4pcs fixing clips with screws.

40x2000mm

50mm





7910AR/AL | 2m Recessed profile + PC opal diffuser | Aluminium | Suitable for 7875, 7880 & 7885 LED Strips 40mm


6



Complete with 2 pairs end cups & 4pcs metal fixing clips.

52x2000mm

35mm





Recessed Profiles
Trimless & Inground




7901TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium | Suitable for 7820, 7821 & 7823 LED Strips 9mm

2



Complete with 2 pairs end cups.

13x2000mm






7904TR/AL | 2m Trimless profile + PC opal diffuser | Aluminium
Suitable for 7825, 7830, 7835, 7835C, 7845, 7870 & 7875 LED Strips 20mm

2



Complete with 2 pairs end cups.

30x2000mm





7914R/AL | 2m Inground profile + 3mm PC opal diffuser | Aluminium | Suitable for 7820 & 7821 LED Strips

IP67


20



Complete with 2 pairs end cups.

23x2000mm

12mm





The 230V Solid LED Strip

Plastic




38104B | 4W | SMD 2835 | Plastic

Connect 25 fittings maximum.

IP20 80 CRI

QUICK FIX CE










38108B | 8W | SMD 2835 | Plastic

Connect 12 fittings maximum.

IP20 80 CRI

QUICK FIX CE










38114B | 14W | SMD 2835 | Plastic

Connect 7 fittings maximum.

IP20 80 CRI

QUICK FIX CE







Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38104B/C	Cool white	4000K	4W	320lm	230V		30	Complete with driver
38104B/W	Warm white	3000K	4W	320lm	230V		30	Complete with driver
38108B/C	Cool white	4000K	8W	640lm	230V		30	Complete with driver
38108B/W	Warm white	3000K	8W	640lm	230V		30	Complete with driver
38114B/C	Cool white	4000K	14W	1120lm	230V		30	Complete with driver
38114B/W	Warm white	3000K	14W	1120lm	230V		30	Complete with driver






38104L | 4W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

IP20 75 CRI

QUICK FIX CE



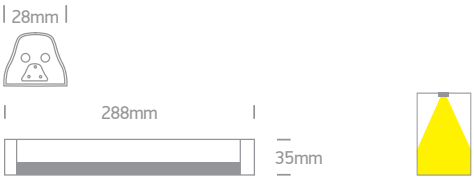




38115L | 15W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

IP20 75 CRI

QUICK FIX CE



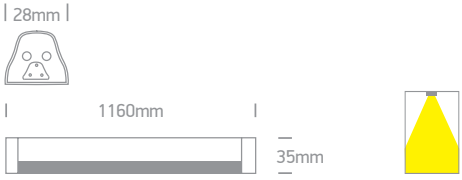

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38104L/D	Daylight	6000K	4W	305lm	100-240V		50	Includes power supply cable, corner cable, connector
38104L/W	Warm white	3000K	4W	280lm	100-240V		50	Includes power supply cable, corner cable, connector
38115L/C	Cool white	4000K	15W	1095lm	100-240V		30	Includes power supply cable, corner cable, connector
38115L/W	Warm white	3000K	15W	1050lm	100-240V		30	Includes power supply cable, corner cable, connector



The 230V Solid Double LED Strip

Aluminium + PC




38207L | 7W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

IP20 75 CRI

QUICK FIX



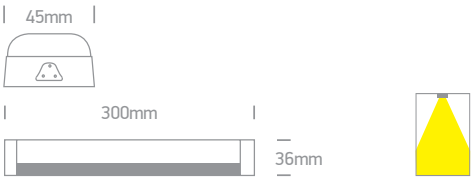




38215L | 15W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

IP20 75 CRI

QUICK FIX



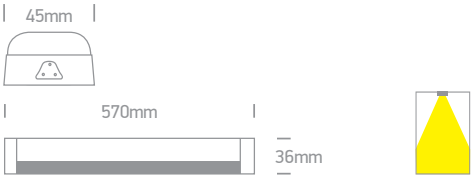




38230L | 30W | LED | Aluminium + PC

Connect maximum 5pcs at 110V / Connect maximum 10pcs at 230V.

IP20 75 CRI

QUICK FIX



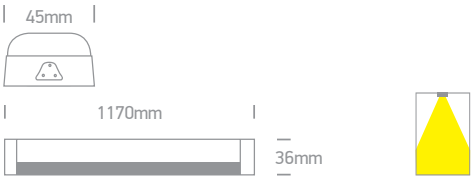

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38207L/D	Daylight	6000K	7W	530lm	100-240V		30	Includes power supply cable, corner cable, connector
38207L/C	Cool white	4000K	7W	510lm	100-240V		30	Includes power supply cable, corner cable, connector
38207L/W	Warm white	3000K	7W	490lm	100-240V		30	Includes power supply cable, corner cable, connector
38215L/D	Daylight	6000K	15W	1140lm	100-240V		25	Includes power supply cable, corner cable, connector
38215L/W	Warm white	3000K	15W	1050lm	100-240V		25	Includes power supply cable, corner cable, connector
38230L/D	Daylight	6000K	30W	2280lm	100-240V		20	Includes power supply cable, corner cable, connector
38230L/C	Cool white	4000K	30W	2190lm	100-240V		20	Includes power supply cable, corner cable, connector
38230L/W	Warm white	3000K	30W	2100lm	100-240V		20	Includes power supply cable, corner cable, connector






38103 | 3W | SMD 3014 | Aluminium + PC

IP20 80 CRI

DIMMABLE QUICK FIX CE



2m maximum each line.






38105 | 5W | SMD 3014 | Aluminium + PC

IP20 80 CRI

DIMMABLE QUICK FIX CE



2m maximum each line.






38110 | 10W | SMD 3014 | Aluminium + PC

IP20 80 CRI

DIMMABLE QUICK FIX CE



2m maximum each line.





12122 | 3W | SMD 3528 | Aluminium + PC

Can be fixed with double face adhesive or screws.

IP20 80 CRI

DIMMABLE QUICK FIX CE




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38103/W	-	Warm white	3000K	3W	225lm	24V DC		100	Requires 24V DC driver / Includes mounting clips (2pcs), screws (2pcs)
38105/W	-	Warm white	3000K	5W	375lm	24V DC		50	Requires 24V DC driver / Includes mounting clips (2pcs), screws (2pcs)
38110/W	-	Warm white	3000K	10W	750lm	24V DC		25	Requires 24V DC driver / Includes mounting clips (3pcs), screws (3pcs)
12122/G/W	Grey	Warm white	3000K	3W	180lm	24V DC		100	Requires 24V DC driver

The LED Shelf System Accessories




38102A | Touch ON/OFF and dimmer | Max. 60W | 24V DC








38102B | Wave hand | Door ON/OFF | Max. 60W | 24V DC








38102C | PIR Sensor | Max. 60W | 24V DC

Adjustable 1min / 5min.








38101A | Connector for 38103, 38105 & 38110





38101B | Corner for 38103, 38105 & 38110

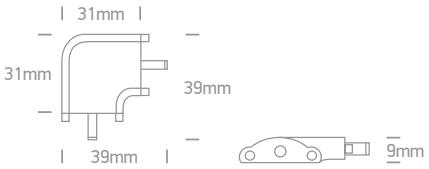




38101C | Power supply cable connector for 38103, 38105 & 38110

100cm



38101D | 8 - Way connection box | 24V DC

100cm





230V Cabinet Light

Die cast




38008 | 3x1W | LED | Cabinet light with switch | Die cast

IP20

QUICK FIX

CE



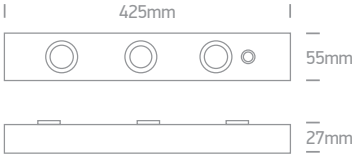

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38008/W/D	White	Daylight	6000K	3x1W	210lm	100-240V		30	Includes power supply cable, corner cable, connector


24V Linkable Modules

Aluminium



38001A | 1W | LED | Aluminium

IP20 DIMMABLE QUICK FIX CE





38002A | 3W | LED | Aluminium


IP20 DIMMABLE QUICK FIX CE





38005A | 6W | LED | Aluminium


IP20 DIMMABLE QUICK FIX CE





38006 & 38007 | Power supply cable and corner cable for 38001A, 38002A & 38005A

III QUICK FIX CE



Power supply cable		
38006A	For DL and WW	200
38006B	For BL	200
38006C	For RGB	200
Corner cable		
38007A	For DL and WW	200
38007B	For BL	200
38007C	For RGB	200

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38001A/D	Daylight	6000K	1W	64lm	24V DC	III	100	Requires 24V DC driver
38001A/W	Warm white	3000K	1W	60lm	24V DC	III	100	Requires 24V DC driver
38001A/BL	Blue	-	1W	-	24V DC	III	100	Requires 24V DC driver
38001A/RGB	RGB	-	1W	-	24V DC	III	100	Requires 24V DC driver
38002A/D	Daylight	6000K	3W	144lm	24V DC	III	100	Requires 24V DC driver
38002A/W	Warm white	3000K	3W	135lm	24V DC	III	100	Requires 24V DC driver
38002A/BL	Blue	-	3W	-	24V DC	III	100	Requires 24V DC driver
38002A/RGB	RGB	-	3W	-	24V DC	III	100	Requires 24V DC driver
38005A/D	Daylight	6000K	6W	384lm	24V DC	III	100	Requires 24V DC driver
38005A/W	Warm white	3000K	6W	360lm	24V DC	III	100	Requires 24V DC driver
38005A/BL	Blue	-	6W	-	24V DC	III	100	Requires 24V DC driver





7850 | 6W/m | SMD 3528 | 60LEDs/m | PVC — Cut every 1m.

IP65

80 CRI

CE



Supplied in 100m roll.

11mm



Accessories for 7850

CE

7850C	Connector
7850P	230V Power supply for 100m
7850F	Fixing clip
7850E	End cup

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7850/D	Daylight	6000K	6W/m	320lm/m	230V		100m roll	Requires 7850P power supply
7850/C	Cool white	4000K	6W/m	310lm/m	230V		100m roll	Requires 7850P power supply
7850/W	Warm white	3000K	6W/m	300lm/m	230V		100m roll	Requires 7850P power supply
7850/BL	Blue	-	6W/m	-	230V		100m roll	Requires 7850P power supply





7860 | 9W/m | SMD 5050 | 60LEDs/m | PVC

Cut every 1m.

IP65

80 CRI

CE



Supplied in 50m roll.

16mm



Accessories for 7860

CE

7860C	Connector
7860P	230V Power supply for 50m
7860F	Fixing clip
7860E	End cup

Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7860/D	Daylight	6000K	9W/m	900lm/m	230V	☐	50m roll	Requires 7860P power supply
7860/C	Cool white	4000K	9W/m	900lm/m	230V	☐	50m roll	Requires 7860P power supply
7860/W	Warm white	3000K	9W/m	860lm/m	230V	☐	50m roll	Requires 7860P power supply



The 230V Lightline



7800/C | 6,6W/m | LED | PVC

Cut every 2m.

IP54

CE



Supplied in 50m roll.



21mm





7800/RGB | 6,6W/m | LED | PVC

Cut every 2m.

IP54

CE



Supplied in 50m roll.



21mm



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7800/C	Cool white	4000K	6,6W/m	324lm/m	230V		50m roll	Requires 7804 power supply
7800/RGB	RGB	-	6,6W/m	-	230V		50m roll	Requires 7808 RGB controller



The 230V Lightline Accessories



7804 | Power supply for 7800

Connect maximum 30m.



7808 | RGB Controller for 7800/RGB

Connect maximum 10m.




Accessories for 7800

7802	Connector	720
7806	Fixing clip	2400
7807	End cup	1200

Order Code	Colour	Input	Class			Notes
7804	Black	230V		60cm	96	-
7808	Black	230V		100cm	48	-

Flex Lightline





7810/D | 4,8W/m | LED | Silicone

IP54

CE



7810/P | 4,8W/m | LED | Silicone

IP54

CE



7810/W | 4,8W/m | LED | Silicone

IP54

CE



7810/V | 4,8W/m | LED | Silicone

IP54

CE



7810/BL | 4,8W/m | LED | Silicone

IP54

CE



7810/RBL | 4,8W/m | LED | Silicone

IP54

CE



7810/R | 4,8W/m | LED | Silicone

IP54

CE



7810/RGB | 15,5W/m | LED | Silicone

IP54

CE

NOTE:
All models can be cut every 1m.
Supplied in 50m roll.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
7810/D	Daylight	6000K	4,8W/m	180lm/m	230V		50m roll	Requires 7814 power supply
7810/W	Warm white	3000K	4,8W/m	180lm/m	230V		50m roll	Requires 7814 power supply
7810/BL	Blue	-	4,8W/m	-	230V		50m roll	Requires 7814 power supply
7810/R	Red	-	4,8W/m	-	230V		50m roll	Requires 7814 power supply
7810/P	Pink	-	4,8W/m	-	230V		50m roll	Requires 7814 power supply
7810/V	Violet	-	4,8W/m	-	230V		50m roll	Requires 7814 power supply
7810/RBL	Red + Blue	-	4,8W/m	-	230V		50m roll	Requires 7818 controller RBL
7810/RGB	RGB	-	15,5W/m	-	230V		50m roll	Requires 7819 controller RGB

Flex Lightline Accessories



7814 | Power supply for 7810

Connect maximum 50m.



7818 | RBL Controller for 7810/RBL

Connect maximum 30m.

7819 | RGB Controller for 7810/RGB

Connect maximum 15m.



Accessories for 7810

7812	Connector	400
7816	Fixing clip	20
7817	End cup	25




7815 | 2m Profile for 7810 | Aluminium



7815/W	White
7815/G	Grey

10






7815B | Housing box for 7814, 7818 & 7819



7815B/W	White
7815B/G	Grey

8



Order Code	Colour	Input	Class			Notes
7814	White	230V	⧈	150cm	100	-
7818	White	230V	⧈	80cm	48	-
7819	White	230V	⧈	80cm	5	-





10

Track Spots

Pages 239-262

COB LED | SMD LED | LED | MR16 | Rx7s | HQI | PAR30 | GU10 | CDM-R

Die cast | Natural aluminium

IP20

ADJUSTABLE DARK LIGHT 80 CRI



Cylindrical Track Spot






65608T | 3x1W | LED | Die cast

IP20 ADJUSTABLE

CE








65610B | 7W | COB LED | Natural aluminium

Ceiling base

IP20 ADJUSTABLE

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65608T/G/D	Grey	Daylight	6000K	3x1W	217lm	60°	100-240V		30	Complete with driver
65608T/G/W	Grey	Warm white	3000K	3x1W	205lm	60°	100-240V		30	Complete with driver
65610B/AL/W	Aluminium	Warm white	3000K	7W	400lm	20°	100-240V		20	Complete with driver






65610AT | 10W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE DARK LIGHT CE








65620AT | 20W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE DARK LIGHT CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65610AT/W/C	White	Cool white	4000K	10W	800lm	38°	230V		20	Complete with driver
65610AT/W/W	White	Warm white	3000K	10W	800lm	38°	230V		20	Complete with driver
65610AT/B/W	Black	Warm white	3000K	10W	800lm	38°	230V		20	Complete with driver
65620AT/W/C	White	Cool white	4000K	20W	1500lm	38°	230V		10	Complete with driver
65620AT/W/W	White	Warm white	3000K	20W	1500lm	38°	230V		10	Complete with driver
65620AT/B/W	Black	Warm white	3000K	20W	1500lm	38°	230V		10	Complete with driver





65611T/B/C


65611T | 15W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE



65611T/G/C







65612T/B/C


65612T | 30W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE



65612T/G/C





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65611T/W/C	White	Cool white	4000K	15W	1200lm	36°	230V		12	Complete with driver
65611T/W/W	White	Warm white	3000K	15W	1100lm	36°	230V		12	Complete with driver
65611T/B/C	Black	Cool white	4000K	15W	1200lm	36°	230V		12	Complete with driver
65611T/B/W	Black	Warm white	3000K	15W	1100lm	36°	230V		12	Complete with driver
65611T/G/C	Grey	Cool white	4000K	15W	1200lm	36°	230V		12	Complete with driver
65611T/G/W	Grey	Warm white	3000K	15W	1100lm	36°	230V		12	Complete with driver
65612T/W/C	White	Cool white	4000K	30W	2400lm	36°	230V		9	Complete with driver
65612T/W/W	White	Warm white	3000K	30W	2300lm	36°	230V		9	Complete with driver
65612T/B/C	Black	Cool white	4000K	30W	2400lm	36°	230V		9	Complete with driver
65612T/B/W	Black	Warm white	3000K	30W	2300lm	36°	230V		9	Complete with driver
65612T/G/C	Grey	Cool white	4000K	30W	2400lm	36°	230V		9	Complete with driver
65612T/G/W	Grey	Warm white	3000K	30W	2300lm	36°	230V		9	Complete with driver



65611T/W/C

65614T/W/C

The COB Track Spot Range

Aluminium



65614T/W/C


65614T | 45W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE



65614T/B/C







65616T/W/C


65616T | 50W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE



65616T/B/C





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65614T/W/C	White	Cool white	4000K	45W	3600lm	36°	230V		9	Complete with driver
65614T/W/W	White	Warm white	3000K	45W	3500lm	36°	230V		9	Complete with driver
65614T/B/C	Black	Cool white	4000K	45W	3600lm	36°	230V		9	Complete with driver
65614T/B/W	Black	Warm white	3000K	45W	3500lm	36°	230V		9	Complete with driver
65614T/G/C	Grey	Cool white	4000K	45W	3600lm	36°	230V		9	Complete with driver
65614T/G/W	Grey	Warm white	3000K	45W	3500lm	36°	230V		9	Complete with driver
65616T/W/C	White	Cool white	4000K	50W	4200lm	38°	230V		6	Complete with driver
65616T/W/W	White	Warm white	3000K	50W	4000lm	38°	230V		6	Complete with driver
65616T/B/C	Black	Cool white	4000K	50W	4200lm	38°	230V		6	Complete with driver
65616T/B/W	Black	Warm white	3000K	50W	4000lm	38°	230V		6	Complete with driver

The COB Cylinder Range

Die cast



65632AT/W/W

65632AT | 20W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE



65632AT/B/W





65632BT/W/W

65632BT | 30W | COB LED | Die cast

IP20 80 CRI


ADJUSTABLE CE



65632BT/B/W



15° Reflector for 65632BT.
Order code 0736/15.






65632T | 35W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE







65632CT | 50W | COB LED | Die cast


IP20 80 CRI

ADJUSTABLE CE





15° Reflector for 65632CT.
Order code 0738/15.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65632AT/W/C	White	Cool white	4000K	20W	1800lm	36°	230V	⏚	16	Complete with driver
65632AT/W/W	White	Warm white	3000K	20W	1750lm	36°	230V	⏚	16	Complete with driver
65632AT/B/W	Black	Warm white	3000K	20W	1750lm	36°	230V	⏚	16	Complete with driver
65632BT/W/C	White	Cool white	4000K	30W	2400lm	36°	230V	⏚	6	Complete with driver
65632BT/W/W	White	Warm white	3000K	30W	2250lm	36°	230V	⏚	6	Complete with driver
65632BT/B/C	Black	Cool white	4000K	30W	2400lm	36°	230V	⏚	6	Complete with driver
65632BT/B/W	Black	Warm white	3000K	30W	2250lm	36°	230V	⏚	6	Complete with driver
65632T/W/C	White	Cool white	4000K	35W	3300lm	36°	230V	⏚	9	Complete with driver
65632T/W/W	White	Warm white	3000K	35W	3200lm	36°	230V	⏚	9	Complete with driver
65632CT/W/C	White	Cool white	4000K	50W	4000lm	36°	230V	⏚	6	Complete with driver
65632CT/W/W	White	Warm white	3000K	50W	3750lm	36°	230V	⏚	6	Complete with driver
65632CT/B/C	Black	Cool white	4000K	50W	4000lm	36°	230V	⏚	6	Complete with driver
65632CT/B/W	Black	Warm white	3000K	50W	3750lm	36°	230V	⏚	6	Complete with driver



65640BT/W/W

65640AT/W/W

The COB Dark Light Cylinder Range

Die cast



65640T | 10W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE DARK LIGHT CE










65640AT | 10W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE DARK LIGHT CE










65640BT | 36W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE DARK LIGHT CE



15° Reflector for 65640BT.
Order code 0740/15.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65640T/W/C	White	Cool white	4000K	10W	650lm	36°	230V		32	Complete with driver
65640T/W/W	White	Warm white	3000K	10W	620lm	36°	230V		32	Complete with driver
65640AT/W/C	White	Cool white	4000K	10W	770lm	36°	230V		24	Complete with driver
65640AT/W/W	White	Warm white	3000K	10W	730lm	36°	230V		24	Complete with driver
65640BT/W/C	White	Cool white	4000K	36W	2500lm	36°	230V		16	Complete with driver
65640BT/W/W	White	Warm white	3000K	36W	2400lm	36°	230V		16	Complete with driver



65620T2/W/C

65620TA/W/C


The COB Side Box Range



65620TA | 15W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE

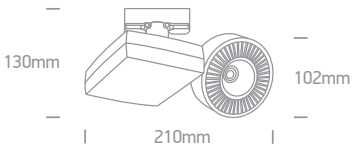




65620T | 20W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE






65620T2 | 2x15W | COB LED | Aluminium

Ideal for corridors, left & right shelves illumination.

IP20 80 CRI

ADJUSTABLE CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65620TA/W/C	White	Cool white	4000K	15W	1200lm	45°	230V		12	Complete with driver
65620TA/W/W	White	Warm white	3000K	15W	1095lm	45°	230V		12	Complete with driver
65620T/W/C	White	Cool white	4000K	20W	1600lm	45°	230V		12	Complete with driver
65620T/W/W	White	Warm white	3000K	20W	1460lm	45°	230V		12	Complete with driver
65620T2/W/C	White	Cool white	4000K	2x15W	2x1200lm	45°	230V		6	Complete with driver
65620T2/W/W	White	Warm white	3000K	2x15W	2x1095lm	45°	230V		6	Complete with driver




COB Track Spots



65628T | 15W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE








65630T | 25W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE








65626T | 25W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65628T/W/C	White	Cool white	4000K	15W	1200lm	45°	230V		12	Complete with driver
65628T/W/W	White	Warm white	3000K	15W	1095lm	45°	230V		12	Complete with driver
65628T/B/C	Black	Cool white	4000K	15W	1200lm	45°	230V		12	Complete with driver
65628T/B/W	Black	Warm white	3000K	15W	1095lm	45°	230V		12	Complete with driver
65630T/W/C	White	Cool white	4000K	25W	1900lm	45°	100-240V		12	Complete with driver
65630T/W/W	White	Warm white	3000K	25W	1800lm	45°	100-240V		12	Complete with driver
65626T/W/C	White	Cool white	4000K	25W	2000lm	45°	100-240V		12	Complete with driver
65626T/W/W	White	Warm white	3000K	25W	1900lm	45°	100-240V		12	Complete with driver






65618T | 35W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE



Optional 20° reflector.
Order code 0732/20.





65619T | 38W | COB LED | Aluminium


IP20 80 CRI

ADJUSTABLE CE



15° Reflector for 65619T.
Order code 0742/15.







65624T | 35W | COB LED | Die cast

Design combination with 11135L.

IP20 80 CRI

ADJUSTABLE CE








65638T | 50W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65618T/W/C	White	Cool white	4000K	35W	3350lm	45°	230V		12	Complete with driver
65618T/W/W	White	Warm white	3000K	35W	3200lm	45°	230V		12	Complete with driver
65618T/G/C	Grey	Cool white	4000K	35W	3350lm	45°	230V		12	Complete with driver
65618T/G/W	Grey	Warm white	3000K	35W	3200lm	45°	230V		12	Complete with driver
65619T/W/C	White	Cool white	4000K	38W	3200lm	36°	230V		16	Complete with driver
65619T/W/W	White	Warm white	3000K	38W	3000lm	36°	230V		16	Complete with driver
65619T/B/C	Black	Cool white	4000K	38W	3200lm	36°	230V		16	Complete with driver
65619T/B/W	Black	Warm white	3000K	38W	3000lm	36°	230V		16	Complete with driver
65624T/W/C	White	Cool white	4000K	35W	3050lm	45°	230V		12	Complete with driver
65624T/W/W	White	Warm white	3000K	35W	2950lm	45°	230V		12	Complete with driver
65638T/W/C	White	Cool white	4000K	50W	3700lm	36°	230V		12	Complete with driver
65638T/W/W	White	Warm white	3000K	50W	3550lm	36°	230V		12	Complete with driver






65226T | 26W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE








65622T | 34W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE



Optional 18° reflector.
Order code 0730/18.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65226T/W/W	White	Warm white	3000K	26W	1960lm	30°	100-240V		8	Complete with driver
65622T/W/C	White	Cool white	4000K	34W	3550lm	42°	230V		12	Complete with driver
65622T/W/W	White	Warm white	3000K	34W	3350lm	42°	230V		12	Complete with driver



65042T/B/C

65510T/B

The Track Floodlight Range


Die cast



65042T | 42W | SMD 2835 | Die cast

IP20 80 CRI

ADJUSTABLE






65510T/W

65510T | 70W | HQI | Rx7s | Die cast


IP20 ADJUSTABLE



65510T/G



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65042T/W/C	White	Cool white	4000K	42W	3570lm	80°	230V		4	Complete with driver
65042T/W/W	White	Warm white	3000K	42W	3150lm	80°	230V		4	Complete with driver
65042T/B/C	Black	Cool white	4000K	42W	3570lm	80°	230V		4	Complete with driver
65042T/B/W	Black	Warm white	3000K	42W	3150lm	80°	230V		4	Complete with driver
65510T/W	White	-	-	70W	-	-	230V		12	Complete with electronic ballast
65510T/B	Black	-	-	70W	-	-	230V		12	Complete with electronic ballast
65510T/G	Grey	-	-	70W	-	-	230V		12	Complete with electronic ballast

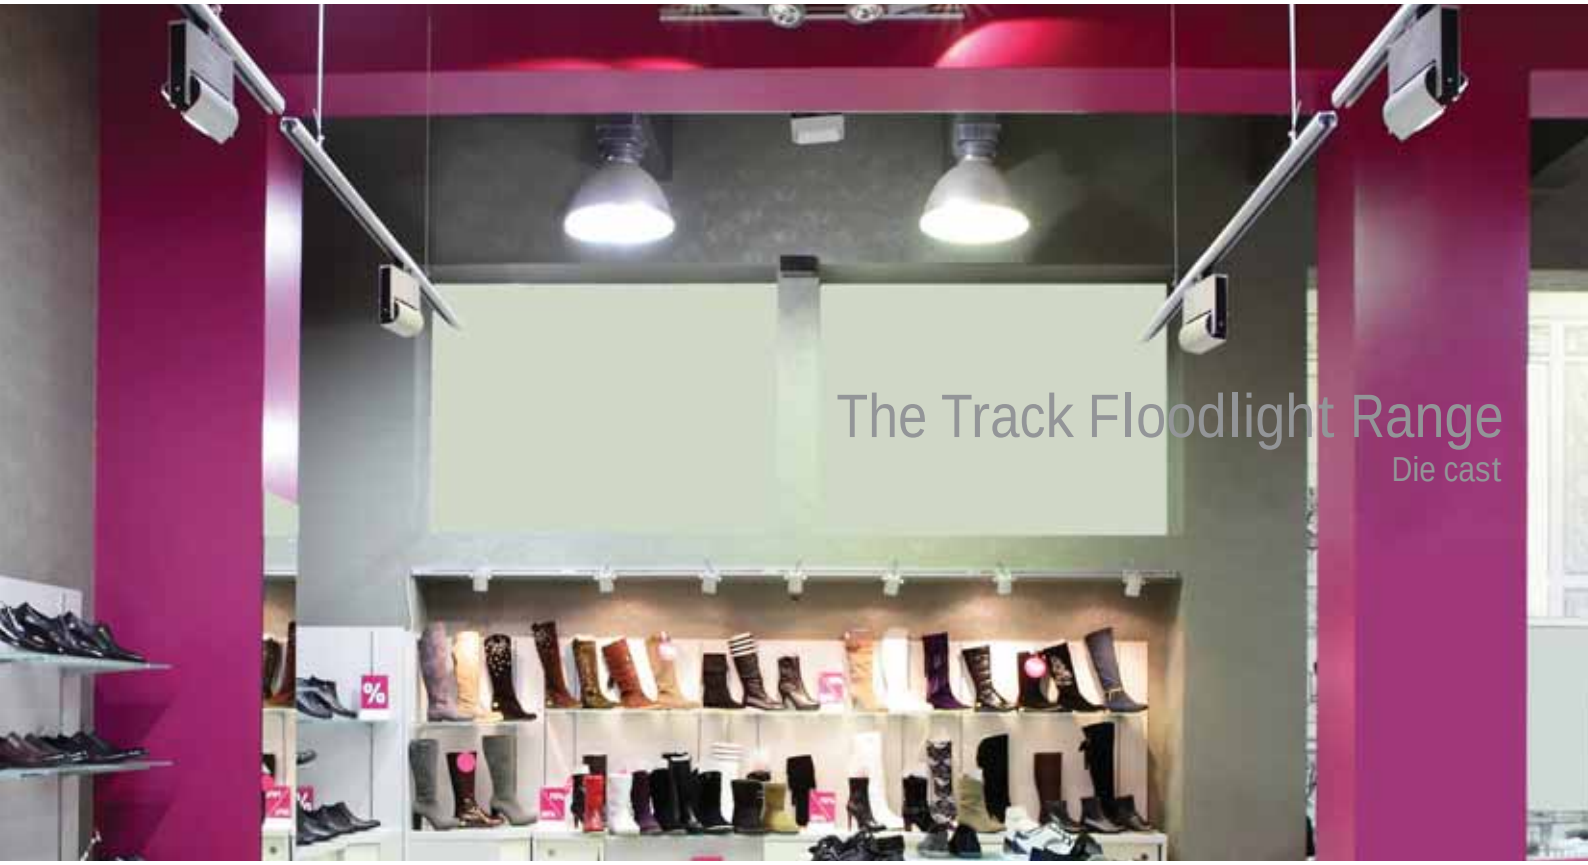




65009T | 100W | Halogen | R7s | Die cast

IP20 ADJUSTABLE

CE



Suitable for 7610L
LED lamp (Direct 230V).







65010T/G


65010T | 70W | HQI | Rx7s | Die cast

IP20 ADJUSTABLE

CE



65010T/B








65010B | 70W | HQI | Rx7s | Ceiling mounted | Die cast

IP20 ADJUSTABLE

CE





Order Code	Colour	Watts	Input	Class		Notes
65009T/G	Grey	100W	230V		12	-
65010T/B	Black	70W	230V		12	Complete with electronic ballast
65010T/G	Grey	70W	230V		12	Complete with electronic ballast
65010B/G	Grey	70W	230V		12	Complete with electronic ballast



The Oval Track Spots


Die cast



65112T | 50W | MR16 | GU5,3 | Die cast

IP20 ADJUSTABLE

CE






65114T | 50W | R111 | G53 | Die cast

IP20 ADJUSTABLE

CE






65116T | 70W | CDM-R | E27 | Die cast

IP20 ADJUSTABLE

CE



Order Code	Colour	Watts	Input	Class		Notes
65112T/G	Grey	50W	230V / 12V		16	Complete with transformer
65114T/G	Grey	50W	230V / 12V		12	Complete with transformer
65116T/G	Grey	70W	230V		12	Complete with electronic ballast



65719T/G

The Cone Series Track Spots


Die cast



65736T | 35W | HQI | G12 | Die cast

IP20 ADJUSTABLE

CE







65719T/G


65719T | 75W | R111 | GU10 | Die cast

IP20 ADJUSTABLE

CE



65719T/B





Order Code	Colour	Watts	Input	Beam Angle	Class		Notes
65736T/G	Grey	35W	230V	67°		12	Complete with electronic ballast
65719T/B	Black	75W	100-240V	-		12	-
65719T/G	Grey	75W	100-240V	-		12	-



The Square Head Range

Die cast



65835T/W

65835T | 35W | HQI | G8,5 | Die cast

IP20 ADJUSTABLE

CE


65835T/B







65834T/W

65834T | 70W | HQI | G8,5 | Die cast

IP20 ADJUSTABLE

CE


65834T/B





Order Code	Colour	Watts	Input	Beam Angle	Class		Notes
65835T/W	White	35W	230V	53°		12	Complete with electronic ballast
65835T/B	Black	35W	230V	53°		12	Complete with electronic ballast
65835T/G	Grey	35W	230V	53°		12	Complete with electronic ballast
65834T/W	White	70W	230V	53°		12	Complete with electronic ballast
65834T/B	Black	70W	230V	53°		12	Complete with electronic ballast
65834T/G	Grey	70W	230V	53°		12	Complete with electronic ballast



The Egg Shell Range

Die cast




65935T | 35W | HQI | G8,5 | Die cast

IP20 ADJUSTABLE

CE



Optional 17° reflector.
Order code 0726/17.








65934T | 70W | HQI | G8,5 | Die cast

IP20 ADJUSTABLE

CE



Optional 17° reflector.
Order code 0726/17.





Order Code	Colour	Watts	Input	Beam Angle	Class		Notes
65935T/G	Grey	35W	230V	53°		18	Complete with electronic ballast
65934T/G	Grey	70W	230V	53°		18	Complete with electronic ballast



Box Series Track Spots

Die cast



65012T | 50W | MR16 | GU5,3 | Die cast

IP20 ADJUSTABLE

CE







65019T/G


65019T | 50W | MR16 | GU10 | Die cast

IP20 ADJUSTABLE

CE



65019T/W








65011T | 75W | PAR30 | E27 | Die cast

IP20 ADJUSTABLE

CE



Suitable for LED lamps.







65016T/G

65016T | 70W | CDM-R | E27 | Die cast

IP20 ADJUSTABLE

CE



65016T/B





Order Code	Colour	Watts	Input	Class		Notes
65012T/G	Grey	50W	230V / 12V		20	Complete with transformer
65019T/W	White	50W	100-240V		16	-
65019T/B	Black	50W	100-240V		16	-
65019T/G	Grey	50W	100-240V		16	-
65011T/G	Grey	75W	100-240V		8	-
65016T/B	Black	70W	230V		8	Complete with electronic ballast
65016T/G	Grey	70W	230V		8	Complete with electronic ballast



π Series Track Spots

Die cast



65008T | 10W | LED | Die cast

IP20 ADJUSTABLE

70 CRI 6000K | 80 CRI 3000K | CE








65013T | 70W | CDM-R111 | GX8,5 | Die cast

IP20 ADJUSTABLE

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65008T/G/D/24	Grey	Daylight	6000K	10W	600lm	24°	230V		12	Complete with driver
65008T/G/W/24	Grey	Warm white	3000K	10W	600lm	24°	230V		12	Complete with driver
65013T/G	Grey	-	-	70W	-	-	230V		8	Complete with electronic ballast



The Side Box Range

Die cast




65532T | 20W | HQI | PGJ5 | Die cast

IP20 ADJUSTABLE

CE



Optional 15° reflector.
Order code 0702/15.








65534T | 70W | HQI | G8,5 | Die cast

IP20 ADJUSTABLE

CE



Optional cross filter.
Order code 0720/B.








65514T | 75W | R111 | G53 | Die cast

IP20 ADJUSTABLE

DIMMABLE CE



Optional cross filter.
Order code 0722/B.





Order Code	Colour	Watts	Input	Beam Angle	Class		Notes
65532T/G	Grey	20W	230V	53°		24	Complete with electronic ballast
65534T/W	White	70W	230V	53°		16	Complete with electronic ballast
65514T/G	Grey	75W	230V / 12V	-		12	Complete with transformer



The Side Box Range HQI


Die cast



65235T | 35W | HQI | G8,5 | Die cast

IP20 ADJUSTABLE

CE








65234T | 70W | HQI | G8,5 | Die cast

IP20 ADJUSTABLE

CE





Order Code	Colour	Watts	Input	Beam Angle	Class		Notes
65235T/W	White	35W	230V	50°		1	Complete with electronic ballast
65235T/G	Grey	35W	230V	50°		1	Complete with electronic ballast
65234T/W	White	70W	230V	50°		1	Complete with electronic ballast
65234T/G	Grey	70W	230V	50°		1	Complete with electronic ballast






65520T | 20W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

CE





Order Code	Colour	Watts	Input	Class		Notes
65520T/W	White	20W	100-240V		20	-
65520T/B	Black	20W	100-240V		20	-



65518T/B

65519T/B

The GU10 Track Spots


Aluminium



65519T | 20W | MR16 | GU10 | Aluminium

IP20 ADJUSTABLE

CE






65518T | 50W | R111 | GU10 | Aluminium

IP20 ADJUSTABLE

CE



Order Code	Colour	Watts	Input	Class		Notes
65519T/W	White	20W	100-240V		12	-
65519T/B	Black	20W	100-240V		12	-
65519T/G	Grey	20W	100-240V		12	-
65518T/W	White	50W	100-240V		12	-
65518T/B	Black	50W	100-240V		12	-
65518T/G	Grey	50W	100-240V		12	-



The E27 & GU10 Range

Die cast



65111AT/W

65111AT | 75W | PAR30 | E27 | Die cast

IP20 ADJUSTABLE


CE



65111AT/G



65111AT/B







65118AT/W

65118AT | 50W | R111 | GU10 | Die cast

IP20 ADJUSTABLE


CE



65118AT/G



65118AT/B





Order Code	Colour	Watts	Input	Class		Notes
65111AT/W	White	75W	100-240V		40	-
65111AT/B	Black	75W	100-240V		40	-
65111AT/G	Grey	75W	100-240V		40	-
65118AT/W	White	50W	100-240V		40	-
65118AT/B	Black	50W	100-240V		40	-
65118AT/G	Grey	50W	100-240V		40	-



LED Linear Track Light



65022T | 20W | SMD 2835 | Linear light | Aluminium + PC

IP20 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65022T/W/C	White	Cool white	4000K	20W	1900lm	120°	230V	⏚	30	Complete with driver
65022T/W/W	White	Warm white	3000K	20W	1800lm	120°	230V	⏚	30	Complete with driver





11

Tracks

Pages 265-270

16A | 6A

Die cast | Aluminium | Plastic

IP20





40003A/W

Square Track Surface & Recessed



40003A/W


40003A | 16A | 3m Square track | 3-phase | Aluminium



40003A/B




40003A/G






40003R/W

40003R | 16A | 3m Recessed track | 3-phase | Aluminium







41002A/W


41002A | 6A | Track adaptor | Plastic



41002A/B



41002A/G





41030/W

41030 | 6A | Surface mount base for track spots | Plastic


IP20



41030/B



41030/G



Order Code	Colour	Input	Ampere	Class		Notes
40003A/W	White	100-240V	16A		10	-
40003A/B	Black	100-240V	16A		10	-
40003A/G	Grey	100-240V	16A		10	-
40003R/W	White	100-240V	16A		6	-
41002A/W	White	100-240V	6A		50	-
41002A/B	Black	100-240V	6A		50	-
41002A/G	Grey	100-240V	6A		50	-
41030/W	White	100-240V	6A		40	-
41030/B	Black	100-240V	6A		40	-
41030/G	Grey	100-240V	6A		40	-

Square Track Accessories




65100/BASE | Mounting base for spots



41020 | Heavy items mechanical adaptor for 40003A | Die cast

41020/W White
41020/B Black
41020/G Grey

50





41004A/W/..


41004A | 16A | Live end for 40003A & 40003R | Plastic



41004A/B/..



41004A/G/..





41010A/W


41010A | 16A | Live connector for 40003A & 40003R | Plastic



41010A/B



41010A/G





41008A/W


41008A | 16A | Connector for 40003A & 40003R | Plastic



41008A/B



41008A/G



Order Code	Colour	Direction	Input	Ampere	Class	📦	Notes
41004A/W/L	White	Left	100-240V	16A	⏚	50	-
41004A/W/R	White	Right	100-240V	16A	⏚	50	-
41004A/B/L	Black	Left	100-240V	16A	⏚	50	-
41004A/B/R	Black	Right	100-240V	16A	⏚	50	-
41004A/G/L	Grey	Left	100-240V	16A	⏚	50	-
41004A/G/R	Grey	Right	100-240V	16A	⏚	50	-
41010A/W	White	-	100-240V	16A	⏚	50	-
41010A/B	Black	-	100-240V	16A	⏚	50	-
41010A/G	Grey	-	100-240V	16A	⏚	50	-
41008A/W	White	-	100-240V	16A	⏚	100	-
41008A/B	Black	-	100-240V	16A	⏚	100	-
41008A/G	Grey	-	100-240V	16A	⏚	100	-

Square Track Accessories



41012A/W/..


41012A | 16A | Corner for 40003A & 40003R | Plastic



41012A/B/..



41012A/G/..





41016A/W


41016A | 16A | T connector for 40003A & 40003R | Plastic



41016A/B



41016A/G





41024A/W


41024A | 16A | Flexible connector for 40003A & 40003R | Plastic



41024A/B



41024A/G





41022A | End cup for 40003A & 40003R | Plastic

41022A/W White
41022A/B Black
41022A/G Grey



200



41026R/W | Adjustable wire 2m for 40003A | Metal

100

Order Code	Colour	Direction	Input	Ampere	Class		Notes
41012A/W/L	White	Left	100-240V	16A	⏚	25	-
41012A/W/R	White	Right	100-240V	16A	⏚	25	-
41012A/B/L	Black	Left	100-240V	16A	⏚	25	-
41012A/B/R	Black	Right	100-240V	16A	⏚	25	-
41012A/G/L	Grey	Left	100-240V	16A	⏚	25	-
41012A/G/R	Grey	Right	100-240V	16A	⏚	25	-
41016A/W	White	-	100-240V	16A	⏚	25	-
41016A/B	Black	-	100-240V	16A	⏚	25	-
41016A/G	Grey	-	100-240V	16A	⏚	25	-
41024A/W	White	-	100-240V	16A	⏚	10	-
41024A/B	Black	-	100-240V	16A	⏚	10	-
41024A/G	Grey	-	100-240V	16A	⏚	10	-




Recessed Track Covers

Plastic




41004B/W | End cup cover for 40003R | Plastic



1000




41008B/W | Connection cover for 40003R | Plastic



500




41012B/W | Corner cover for 40003R | Plastic



500



41016B/W | T connection cover for 40003R | Plastic




500

Rounded Track & Accessories


40003/G

40003 | 16A | 3m track | 3-phase | Aluminium


40003/W





41002/G

41002 | 16A | Track adaptor | Plastic


41002/W



41002/B




41004/G/L

41004 | 16A | Live end for 40003 | Plastic



41004/W/L




41010/G

41010 | 16A | Live connector for 40003 | Plastic


41010/W




41008/G

41008 | 16A | Connector for 40003 | Plastic


41008/W


41008/B



Order Code	Colour	Direction	Input	Ampere	Class		Notes
40003/W	White	-	100-240V	16A		10	-
40003/G	Grey	-	100-240V	16A		10	-
41002/W	White	-	100-240V	16A		150	-
41002/B	Black	-	100-240V	16A		150	-
41002/G	Grey	-	100-240V	16A		150	-
41004/W/L	White	Left	100-240V	16A		50	-
41004/G/L	Grey	Left	100-240V	16A		50	-
41010/W	White	-	100-240V	16A		40	-
41010/G	Grey	-	100-240V	16A		40	-
41008/W	White	-	100-240V	16A		50	-
41008/B	Black	-	100-240V	16A		50	-
41008/G	Grey	-	100-240V	16A		50	-

Rounded Track Accessories



41012/G/..


41012 | 16A | Corner for 40003 | Plastic



41012/W/..



41012/B/..





41016/G


41016 | 16A | T connector for 40003 | Plastic



41016/W



41016/B






41018/G

41018 | 16A | X connector for 40003 | Plastic



41018/W






41022 | End cover for 40003 | Plastic

41022/W White
41022/G Grey

200






41020 | Heavy items mechanical adaptor for 40003 | Die cast

41020/W White
41020/B Black
41020/G Grey

50



Order Code	Colour	Direction	Input	Ampere	Class		Notes
41012/W/L	White	Left	100-240V	16A	⏚	20	-
41012/W/R	White	Right	100-240V	16A	⏚	20	-
41012/B/L	Black	Left	100-240V	16A	⏚	20	-
41012/B/R	Black	Right	100-240V	16A	⏚	20	-
41012/G/L	Grey	Left	100-240V	16A	⏚	20	-
41012/G/R	Grey	Right	100-240V	16A	⏚	20	-
41016/W	White	-	100-240V	16A	⏚	10	-
41016/B	Black	-	100-240V	16A	⏚	10	-
41016/G	Grey	-	100-240V	16A	⏚	10	-
41018/W	White	-	100-240V	16A	⏚	10	-
41018/G	Grey	-	100-240V	16A	⏚	10	-

one





12

Office & Kitchen

Pages 273-280

T5 | T8 | 2G11 | SMD LED

Die cast | Aluminium | Metal + glass | Steel | Plastic

IP20 IP65

ADJUSTABLE QUICK FIX 80 CRI



T5 Linkable
Plastic




38135A | 35W | T5 | Diffuser | Plastic

IP20 QUICK FIX

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
38135A/W	White	Warm white	3000K	35W	230V		30	Includes warm white lamp, power supply cable, corner cable, connector



T5 Slim Cabinet Light

Plastic




38108F | 8W | T5 | Plastic

IP20 QUICK FIX

CE








38113F | 13W | T5 | Plastic

IP20 QUICK FIX

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
38108F/C	White	Cool white	4000K	8W	230V		20	Includes cool white lamp, power supply cable, corner cable, connector
38113F/C	White	Cool white	4000K	13W	230V		20	Includes cool white lamp, power supply cable, corner cable, connector





T5 Glass Tube

Metal + glass




38128H | 28W | T5 | Metal + glass

IP20

CE







Order Code	Colour	Watts	Input	Class		Notes
38128H/C	Chrome	28W	230V	⏚	12	Complete with electronic ballast

Office Lighting

Die cast





36255B | 2x55W | 2G11 | Die cast

IP20

CE









36455B | 4x55W | 2G11 | Die cast

IP20

CE





Order Code	Colour	Watts	Input	Class		Notes
36255B/G	Grey	2x55W	230V		1	Complete with electronic ballast
36455B/G	Grey	4x55W	230V		1	Complete with electronic ballast



38236D/W + 38236DF

The LED T8 Linear Fittings



38236D/W

38236D | 2xT8 LED 120cm | Steel


Diffuser / louver must be ordered separately

IP20

CE



38236D/G

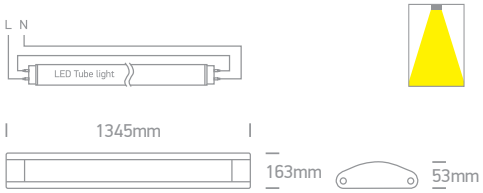



38258D/W

38258D | 2xT8 LED 150cm | Steel


Diffuser / louver must be ordered separately

IP20

CE



38258D/G

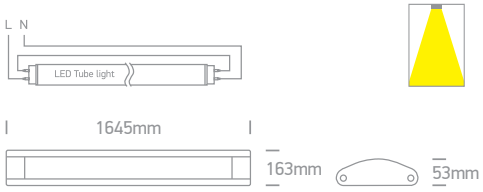



38236DL | Louver for 38236D & 38258D | 30cm | Plastic

CE



For 38236D order 4pcs

For 38258D order 5pcs



38236DF | Diffuser for 38236D | 120cm

CE





38258DF | Diffuser for 38258D | 150cm

CE



Order Code	Colour	Input	Class		Notes
38236D/W	White	100-240V	⏚	6	Only suitable for T8 LED tubes
38236D/G	Grey	100-240V	⏚	6	Only suitable for T8 LED tubes
38258D/W	White	100-240V	⏚	6	Only suitable for T8 LED tubes
38258D/G	Grey	100-240V	⏚	6	Only suitable for T8 LED tubes




T5 Suspended Linear




38154A | 54W | T5 | Aluminium

IP20

CE










38154M | 54W | T5 | Aluminium

IP20 DARK LIGHT


CE







Order Code	Colour	Watts	Input	Class		Notes
38154A/G	Grey	54W	230V	⏚	6	Complete with electronic ballast
38154M/G	Grey	54W	230V	⏚	6	Complete with electronic ballast

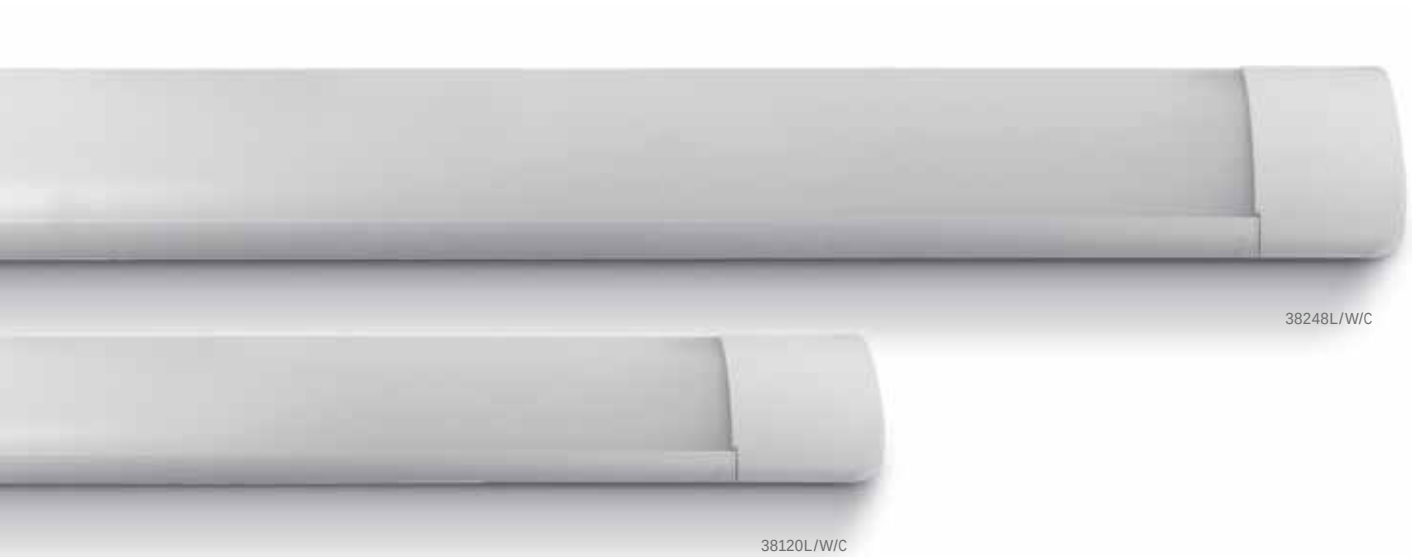

The LED Linear Range




38120L | 20W | SMD 2835 | Aluminium + PC

IP20 80 CRI

CE



Optional suspension kit.
Order code 050090.






38135L | 35W | SMD 2835 | Aluminium + PC

IP20 80 CRI

CE



Optional suspension kit.
Order code 050090.






38248L | 48W | SMD 2835 | Aluminium + PC

IP20 80 CRI

CE



Optional suspension kit.
Order code 050090.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38120L/W/C	White	Cool white	4000K	20W	1800lm	230V		12	Complete with driver
38120L/W/W	White	Warm white	3000K	20W	1700lm	230V		12	Complete with driver
38135L/W/C	White	Cool white	4000K	35W	3100lm	230V		12	Complete with driver
38135L/W/W	White	Warm white	3000K	35W	3000lm	230V		12	Complete with driver
38248L/W/C	White	Cool white	4000K	48W	4300lm	230V		12	Complete with driver
38248L/W/W	White	Warm white	3000K	48W	4200lm	230V		12	Complete with driver





13

Wall & Ceiling

Pages 283-310

R111 | MR16 | PAR30 | GU10 | G9 | GX53 | E27

Die cast | Natural aluminium | Gypsum | Stainless steel

IP20 IP44 IP54

ADJUSTABLE ADJUSTABLE DARK LIGHT






62210B/B


62110B/W


The R111 GU10 Spots
Aluminium



62110B/W | 75W | R111 | GU10 | Aluminium

IP20 ADJUSTABLE

CE






62110B/B | 75W | R111 | GU10 | Aluminium

IP20 ADJUSTABLE

CE






62210B/W | 2x75W | R111 | GU10 | Aluminium

IP20 ADJUSTABLE

CE






62210B/B | 2x75W | R111 | GU10 | Aluminium

IP20 ADJUSTABLE

CE



Order Code	Colour	Watts	Input	Class		Notes
62110B/W	White	75W	100-240V		20	-
62110B/B	Black	75W	100-240V		20	-
62210B/W	White	2x75W	100-240V		8	-
62210B/B	Black	2x75W	100-240V		8	-



The R111 GU10 Spots

Natural aluminium



62110 | 75W | R111 | GU10 | Natural aluminium

IP20 ADJUSTABLE

CE






62110A | 75W | R111 | GU10 | Natural aluminium

IP20 ADJUSTABLE

CE

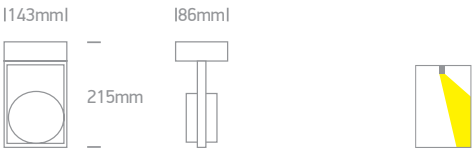




62210A | 2x75W | R111 | GU10 | Natural aluminium

IP20 ADJUSTABLE

CE

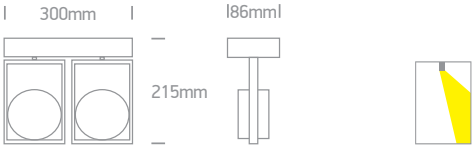




62310A | 3x75W | R111 | GU10 | Natural aluminium

IP20 ADJUSTABLE

CE

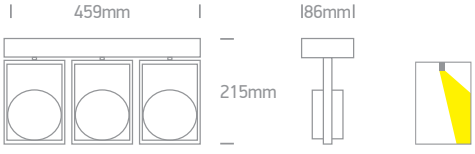

Order Code	Colour	Watts	Input	Class		Notes
62110/AL	Aluminium	75W	100-240V		12	-
62110A/AL	Aluminium	75W	100-240V		10	-
62210A/AL	Aluminium	2x75W	100-240V		6	-
62310A/AL	Aluminium	3x75W	100-240V		4	-

one

Indirect Wall Light


Natural aluminium



38108J | 8W | T5 | Natural aluminium

IP20 DARK LIGHT

CE



Order Code	Colour	Watts	Input	Class		Notes
38108J/AL	Aluminium	8W	230V	⏚	12	Complete with electronic ballast



The Decorative Wall Lights


Gypsum



60038 | 20W | E27 | Gypsum

IP20

CE








60040 | 40W | G9 | Gypsum

IP20

CE










60042 | 40W | G9 | Gypsum

IP20

CE










60054 | 2x35W | MR16 | GU10 | Gypsum

IP20

CE



Suitable for LED lamps.





Order Code	Colour	Watts	Input	Class		Notes
60038	White	20W	100-240V		6	-
60040	White	40W	100-240V		18	-
60042	White	40W	100-240V		9	-
60054	White	2x35W	100-240V		9	-



GU10 Ceiling Cylinders

Aluminium



12105E/W


12105E | 20W | MR16 | GU10 | Aluminium

IP20 DARK LIGHT

CE



12105E/B








12105D | 20W | MR16 | GU10 | Aluminium

IP20

CE







Order Code	Colour	Watts	Input	Class		Notes
12105E/W	White	20W	100-240V		20	-
12105E/B	Black	20W	100-240V		20	-
12105D/W	White	20W	100-240V		20	-



12138G/B

12140/G

Adjustable Ceiling Lights




12140 | 75W | PAR30 | E27 | Die cast

IP20 ADJUSTABLE

CE










12140G | 75W | R111 | GU10 | Die cast

IP20 ADJUSTABLE

CE










12142 | 75W | R111 | GU10 | Aluminium

IP20 ADJUSTABLE

CE









12138G/W


12138G | 75W | R111 | GU10 | Die cast

IP20 ADJUSTABLE

CE



12138G/G





Order Code	Colour	Watts	Input	Class		Notes
12140/G	Grey	75W	100-240V		18	-
12140G/G	Grey	75W	100-240V		18	-
12142/W	White	75W	100-240V		20	-
12138G/W	White	75W	100-240V		32	-
12138G/B	Black	75W	100-240V		32	-
12138G/G	Grey	75W	100-240V		32	-



Square Ceiling Lights

Natural aluminium




12105B | 35W | MR16 | GU10 | Natural aluminium

IP20 ADJUSTABLE

CE



Suitable for LED lamps.






12205B | 2x35W | MR16 | GU10 | Natural aluminium

IP20 ADJUSTABLE

CE



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
12105B/AL	Aluminium	35W	100-240V	⏚	20	-
12205B/AL	Aluminium	2x35W	100-240V	⏚	20	-



The GU10 Ceiling Lights

Aluminium


12105AB/AL


12105AB | 10W | MR16 | GU10 | Aluminium

IP20

ADJUSTABLE


12105AB/W


12105AB/B




12105AC/AL


12105AC | 10W | MR16 | GU10 | Aluminium

IP20


ADJUSTABLE


12105AC/W


12105AC/B



Order Code	Colour	Watts	Input	Class		Notes
12105AB/AL	Aluminium	10W	100-240V		20	-
12105AB/W	White	10W	100-240V		20	-
12105AB/B	Black	10W	100-240V		20	-
12105AC/AL	Aluminium	10W	100-240V		10	-
12105AC/W	White	10W	100-240V		10	-
12105AC/B	Black	10W	100-240V		10	-

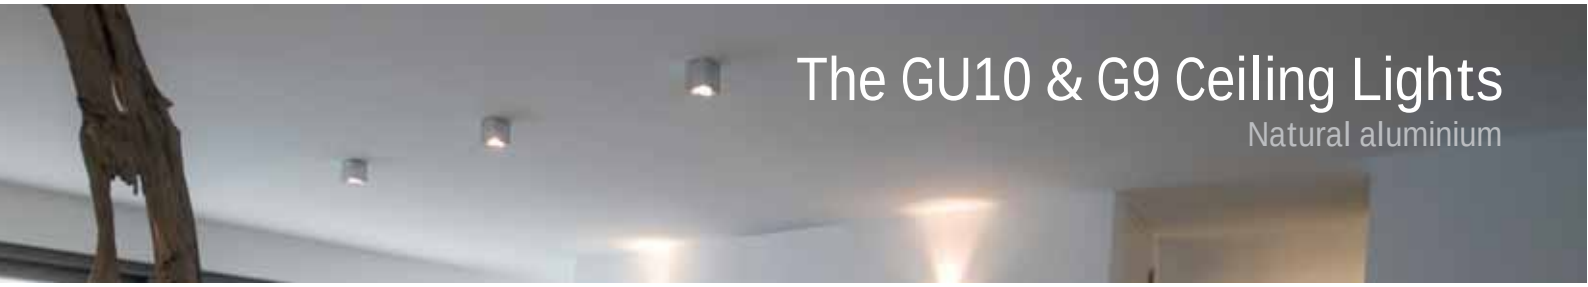

The GU10 & G9 Ceiling Lights

Natural aluminium




12132 | 50W | MR16 | GU10 | Natural aluminium

IP20

CE



Suitable for LED lamps.








12126 | 50W | MR16 | GU10 | Natural aluminium

IP20

CE



Suitable for LED lamps.








12124 | 35W | MR16 | GU10 | Natural aluminium

IP20

CE



Suitable for LED lamps.








12134 | 50W | MR16 | GU10 | Natural aluminium

IP20

CE



Suitable for LED lamps.








12120 | 25W | G9 | Natural aluminium

IP20

CE



Suitable for LED lamps.





Order Code	Colour	Watts	Input	Class		Notes
12132/AL	Aluminium	50W	100-240V		50	-
12126/AL	Aluminium	50W	100-240V		20	-
12124/AL	Aluminium	35W	100-240V		12	-
12134/AL	Aluminium	50W	100-240V		20	-
12120/AL	Aluminium	25W	100-240V		4	-



The GU10 Indoor/Outdoor Spots




67300 | 35W | MR16 | GU10 | Natural aluminium

IP54

ADJUSTABLE



Suitable for LED lamps.





67164/AL

67164 | 35W | MR16 | GU10 | Aluminium

IP54


ADJUSTABLE



67164/G



67164/BR





67162/AL

67162 | 35W | MR16 | GU10 | Aluminium

IP54


ADJUSTABLE



67162/G



67162/BR



Order Code	Colour	Watts	Input	Class		Notes
67300/AL	Aluminium	35W	100-240V		10	-
67164/AL	Aluminium	35W	100-240V		10	-
67164/G	Grey	35W	100-240V		20	-
67164/BR	Rust brown	35W	100-240V		20	-
67162/AL	Aluminium	35W	100-240V		10	-
67162/G	Grey	35W	100-240V		20	-
67162/BR	Rust brown	35W	100-240V		20	-



G9 Decorative Wall Lights

Aluminium



60056/W

60056 | 30W | G9 | Aluminium

IP20

CE


60056/B





6017/W

6017 | 30W | G9 | Aluminium

IP20

CE


6017/B





6017A/W

6017A | 30W | G9 | Aluminium

IP20

CE


6017A/B





6030/W

6030 | 30W | G9 | Mirror reflector | Aluminium

IP20

CE


6030/B



Order Code	Colour	Watts	Input	Class		Notes
60056/W	White	30W	100-240V		20	-
60056/B	Black	30W	100-240V		20	-
6017/W	White	30W	100-240V		20	-
6017/B	Black	30W	100-240V		20	-
6017A/W	White	30W	100-240V		20	-
6017A/B	Black	30W	100-240V		20	-
6030/W	White	30W	100-240V		20	-
6030/B	Black	30W	100-240V		20	-



The GU10 & G9 Wall Lights




6017G | 40W | G9 | Natural aluminium

IP20

CE



Suitable for LED lamps.






6012 | 40W | G9 | Natural aluminium

IP20

CE



Suitable for LED lamps.






6022 | 2x50W | MR16 | GU10 | Natural aluminium

IP20

CE



Suitable for LED lamps.






6005 | 50W | MR16 | GU10 | Die cast

IP20

CE



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
6017G/AL	Aluminium	40W	100-240V		20	-
6012/AL	Aluminium	40W	100-240V		10	-
6022/AL	Aluminium	2x50W	100-240V		25	-
6005/G	Grey	50W	100-240V		20	-





67228 | 9W | GX53 | Natural aluminium

IP54

CE






67226 | 9W | GX53 | Natural aluminium

IP54

CE



Order Code	Colour	Watts	Input	Class		Notes
67228/AL	Aluminium	9W	100-240V		20	-
67226/AL	Aluminium	9W	100-240V		20	-



67222B/AL

67302A/AL

67302/AL

The GX53 Range

Natural aluminium



67302 | 9W | GX53 | Natural aluminium

IP54

CE






67302A | 2x9W | GX53 | Natural aluminium

IP54

CE





67222B | 3x9W | GX53 | Natural aluminium

IP20

CE



Order Code	Colour	Watts	Input	Class		Notes
67302/AL	Aluminium	9W	100-240V		20	-
67302A/AL	Aluminium	2x9W	100-240V		10	-
67222B/AL	Aluminium	3x9W	100-240V		10	-



Indoor/Outdoor Wall Lights

Natural aluminium




67160 | 2x35W | MR16 | GU10 | Natural aluminium

IP54

CE



Suitable for LED lamps.








67163A | 35W | MR16 | GU10 | Natural aluminium

IP54

CE



Suitable for LED lamps.








67163 | 2x35W | MR16 | GU10 | Natural aluminium

IP54

CE



Suitable for LED lamps.





Order Code	Colour	Watts	Input	Class		Notes
67160/AL	Aluminium	2x35W	100-240V		10	-
67163A/AL	Aluminium	35W	100-240V		20	-
67163/AL	Aluminium	2x35W	100-240V		10	-



The GU10 Outdoor Wall Lights

Die cast



67400A/W

67400A | 35W | MR16 | GU10 | Die cast

IP54


CE



67400A/G



67400A/AN







67400B/W

67400B | 2x35W | MR16 | GU10 | Die cast

IP54


CE



67400B/G



67400B/AN





Order Code	Colour	Watts	Input	Class		Notes
67400A/W	White	35W	100-240V		12	-
67400A/G	Grey	35W	100-240V		12	-
67400A/AN	Anthracite	35W	100-240V		12	-
67400B/W	White	2x35W	100-240V		12	-
67400B/G	Grey	2x35W	100-240V		12	-
67400B/AN	Anthracite	2x35W	100-240V		12	-


67130A/W


67130E/BR


67130D/G


67130C/W

GU10 Outdoor Cylinders

Die cast


67130C/AN


67130C | 35W | MR16 | GU10 | Die cast

IP54

CE


67130C/G


67130C/BR






67130E/AN


67130E | 35W | MR16 | GU10 | Die cast

IP54

CE


67130E/G


67130E/BR






67130/AN


67130 | 2x35W | MR16 | GU10 | Die cast

IP54

CE


67130/G


67130/BR





Order Code	Colour	Watts	Input	Class		Notes
67130C/W	White	35W	100-240V		30	-
67130C/G	Grey	35W	100-240V		30	-
67130C/AN	Anthracite	35W	100-240V		30	-
67130C/BR	Rust brown	35W	100-240V		30	-
67130E/W	White	35W	100-240V		18	-
67130E/G	Grey	35W	100-240V		18	-
67130E/AN	Anthracite	35W	100-240V		18	-
67130E/BR	Rust brown	35W	100-240V		18	-
67130/W	White	2x35W	100-240V		18	-
67130/G	Grey	2x35W	100-240V		18	-
67130/AN	Anthracite	2x35W	100-240V		18	-
67130/BR	Rust brown	2x35W	100-240V		18	-



GU10 Outdoor Cubes

Die cast



67130D/AN

67130D | 35W | MR16 | GU10 | Die cast

IP54


CE



67130D/W



67130D/G







67130F/AN

67130F | 35W | MR16 | GU10 | Die cast

IP54


CE



67130F/W



67130F/G







67130A/AN

67130A | 2x35W | MR16 | GU10 | Die cast

IP54


CE



67130A/W



67130A/G





Order Code	Colour	Watts	Input	Class		Notes
67130D/W	White	35W	100-240V		20	-
67130D/G	Grey	35W	100-240V		20	-
67130D/AN	Anthracite	35W	100-240V		20	-
67130D/BR	Rust brown	35W	100-240V		20	-
67130F/W	White	35W	100-240V		20	-
67130F/G	Grey	35W	100-240V		20	-
67130F/AN	Anthracite	35W	100-240V		20	-
67130F/BR	Rust brown	35W	100-240V		20	-
67130A/W	White	2x35W	100-240V		20	-
67130A/G	Grey	2x35W	100-240V		20	-
67130A/AN	Anthracite	2x35W	100-240V		20	-
67130A/BR	Rust brown	2x35W	100-240V		20	-


67132E/G


67132C/BR


67132D/G


67132A/W

PAR30 Outdoor Cylinders

Die cast


67132C/AN


67132C | 75W | PAR30 | E27 | Die cast

IP54

CE


67132C/G


67130C/BR






67132E/AN


67132E | 75W | PAR30 | E27 | Die cast

IP54

CE


67132E/G


67132E/BR






67132/AN


67132 | 2x75W | PAR30 | E27 | Die cast

IP54

CE


67132/G


67132/BR





Order Code	Colour	Watts	Input	Class		Notes
67132C/W	White	75W	100-240V		18	-
67132C/G	Grey	75W	100-240V		18	-
67132C/AN	Anthracite	75W	100-240V		18	-
67132C/BR	Rust brown	75W	100-240V		18	-
67132E/G	Grey	75W	100-240V		12	-
67132E/AN	Anthracite	75W	100-240V		12	-
67132E/BR	Rust brown	75W	100-240V		12	-
67132/W	White	2x75W	100-240V		12	-
67132/G	Grey	2x75W	100-240V		12	-
67132/AN	Anthracite	2x75W	100-240V		12	-
67132/BR	Rust brown	2x75W	100-240V		12	-



PAR30 Outdoor Cubes

Die cast



67132D/AN

67132D | 75W | PAR30 | E27 | Die cast

IP54


CE



67132D/W



67132D/G







67132F/AN


67132F | 75W | PAR30 | E27 | Die cast

IP54

CE



67132F/G







67132A/AN

67132A | 2x75W | PAR30 | E27 | Die cast

IP54


CE



67132A/W



67132A/G





Order Code	Colour	Watts	Input	Class		Notes
67132D/W	White	75W	100-240V		18	-
67132D/G	Grey	75W	100-240V		18	-
67132D/AN	Anthracite	75W	100-240V		18	-
67132F/G	Grey	75W	100-240V		12	-
67132F/AN	Anthracite	75W	100-240V		12	-
67132A/W	White	2x75W	100-240V		12	-
67132A/G	Grey	2x75W	100-240V		12	-
67132A/AN	Anthracite	2x75W	100-240V		12	-



The Round E27 Outdoor Plafo

Die cast


67204B/AN

67204B | 2x20W | E27 | Die cast

IP54

CE


67204B/W


67204B/G




67204/AN


67204 | 20W | E27 | Die cast

IP54

CE


67204/W


67204/G






67206 | 3x20W | E27 | Die cast

IP54

CE



Order Code	Colour	Watts	Input	Class		Notes
67204B/W	White	2x20W	100-240V		10	-
67204B/G	Grey	2x20W	100-240V		10	-
67204B/AN	Anthracite	2x20W	100-240V		10	-
67204/W	White	20W	100-240V		6	-
67204/G	Grey	20W	100-240V		6	-
67204/AN	Anthracite	20W	100-240V		6	-
67206/G	Grey	3x20W	100-240V		3	-



The Square E27 Outdoor Plafo

Die cast



67208B/AN

67208B | 2x20W | E27 | Die cast

IP54


CE



67208B/W



67208B/G





67208/AN

67208 | 20W | E27 | Die cast

IP54


CE



67208/W



67208/G





67210/AN

67210 | 2x20W | E27 | Die cast

IP54


CE



67210/W



67210/G



Order Code	Colour	Watts	Input	Class		Notes
67208B/W	White	2x20W	100-240V		10	-
67208B/G	Grey	2x20W	100-240V		10	-
67208B/AN	Anthracite	2x20W	100-240V		10	-
67208/W	White	20W	100-240V		8	-
67208/G	Grey	20W	100-240V		8	-
67208/AN	Anthracite	20W	100-240V		8	-
67210/W	White	2x20W	100-240V		6	-
67210/G	Grey	2x20W	100-240V		6	-
67210/AN	Anthracite	2x20W	100-240V		6	-



67104P/G

67106P/G

The GX53 Outdoor Plafo

Die cast



67104P | 9W | GX53 | Die cast

IP54

CE

140mm

40mm



67106P | 9W | GX53 | Die cast

IP54

CE

140mm

50mm

Order Code	Colour	Watts	Input	Class		Notes
67104P/G	Grey	9W	100-240V	⏚	30	-
67106P/G	Grey	9W	100-240V	⏚	30	-



The GX53 Outdoor Range


Die cast



67134E | 9W | GX53 | Die cast

IP54

CE








67134F | 9W | GX53 | Die cast

IP54

CE








67134A | 2x9W | GX53 | Die cast

IP54

CE





Order Code	Colour	Watts	Input	Class		Notes
67134E/G	Grey	9W	100-240V		12	-
67134F/G	Grey	9W	100-240V		12	-
67134A/W	White	2x9W	100-240V		8	-


67328A/G


67216B/G


67216/G

Outdoor E27 Square

Die cast



67328/G

67328 | 20W | E27 | Die cast + PC

IP54

CE


67328/AN








67328A | 20W | E27 | Die cast + PC

IP54

CE







67292/G

67292 | 2x15W | E27 | Die cast + glass

IP54

CE


67292/AN





Order Code	Colour	Watts	Input	Class		Notes
67328/G	Grey	20W	100-240V		8	-
67328/AN	Anthracite	20W	100-240V		8	-
67328A/G	Grey	20W	100-240V		8	-
67292/G	Grey	2x15W	100-240V		4	-
67292/AN	Anthracite	2x15W	100-240V		4	-



Outdoor Plafo

Die cast



67216B | 2x15W | E27 | Die cast

IP54

CE

180x280mm

90mm



67216 | 2x20W | E27 | Die cast

IP54

CE

300x300mm

95mm



67214 | 2x20W | E27 | Die cast

IP54

CE

300mm

95mm

Order Code	Colour	Watts	Input	Class		Notes
67216B/G	Grey	2x15W	100-240V		10	-
67216/G	Grey	2x20W	100-240V		6	-
67214/G	Grey	2x20W	100-240V		6	-



Outdoor Wall & Ceiling Spot

Stainless steel




67032 | 35W | MR16 | GU10 | Stainless steel 304

IP44 ADJUSTABLE


CE



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
67032	Stainless steel	35W	100-240V		12	-

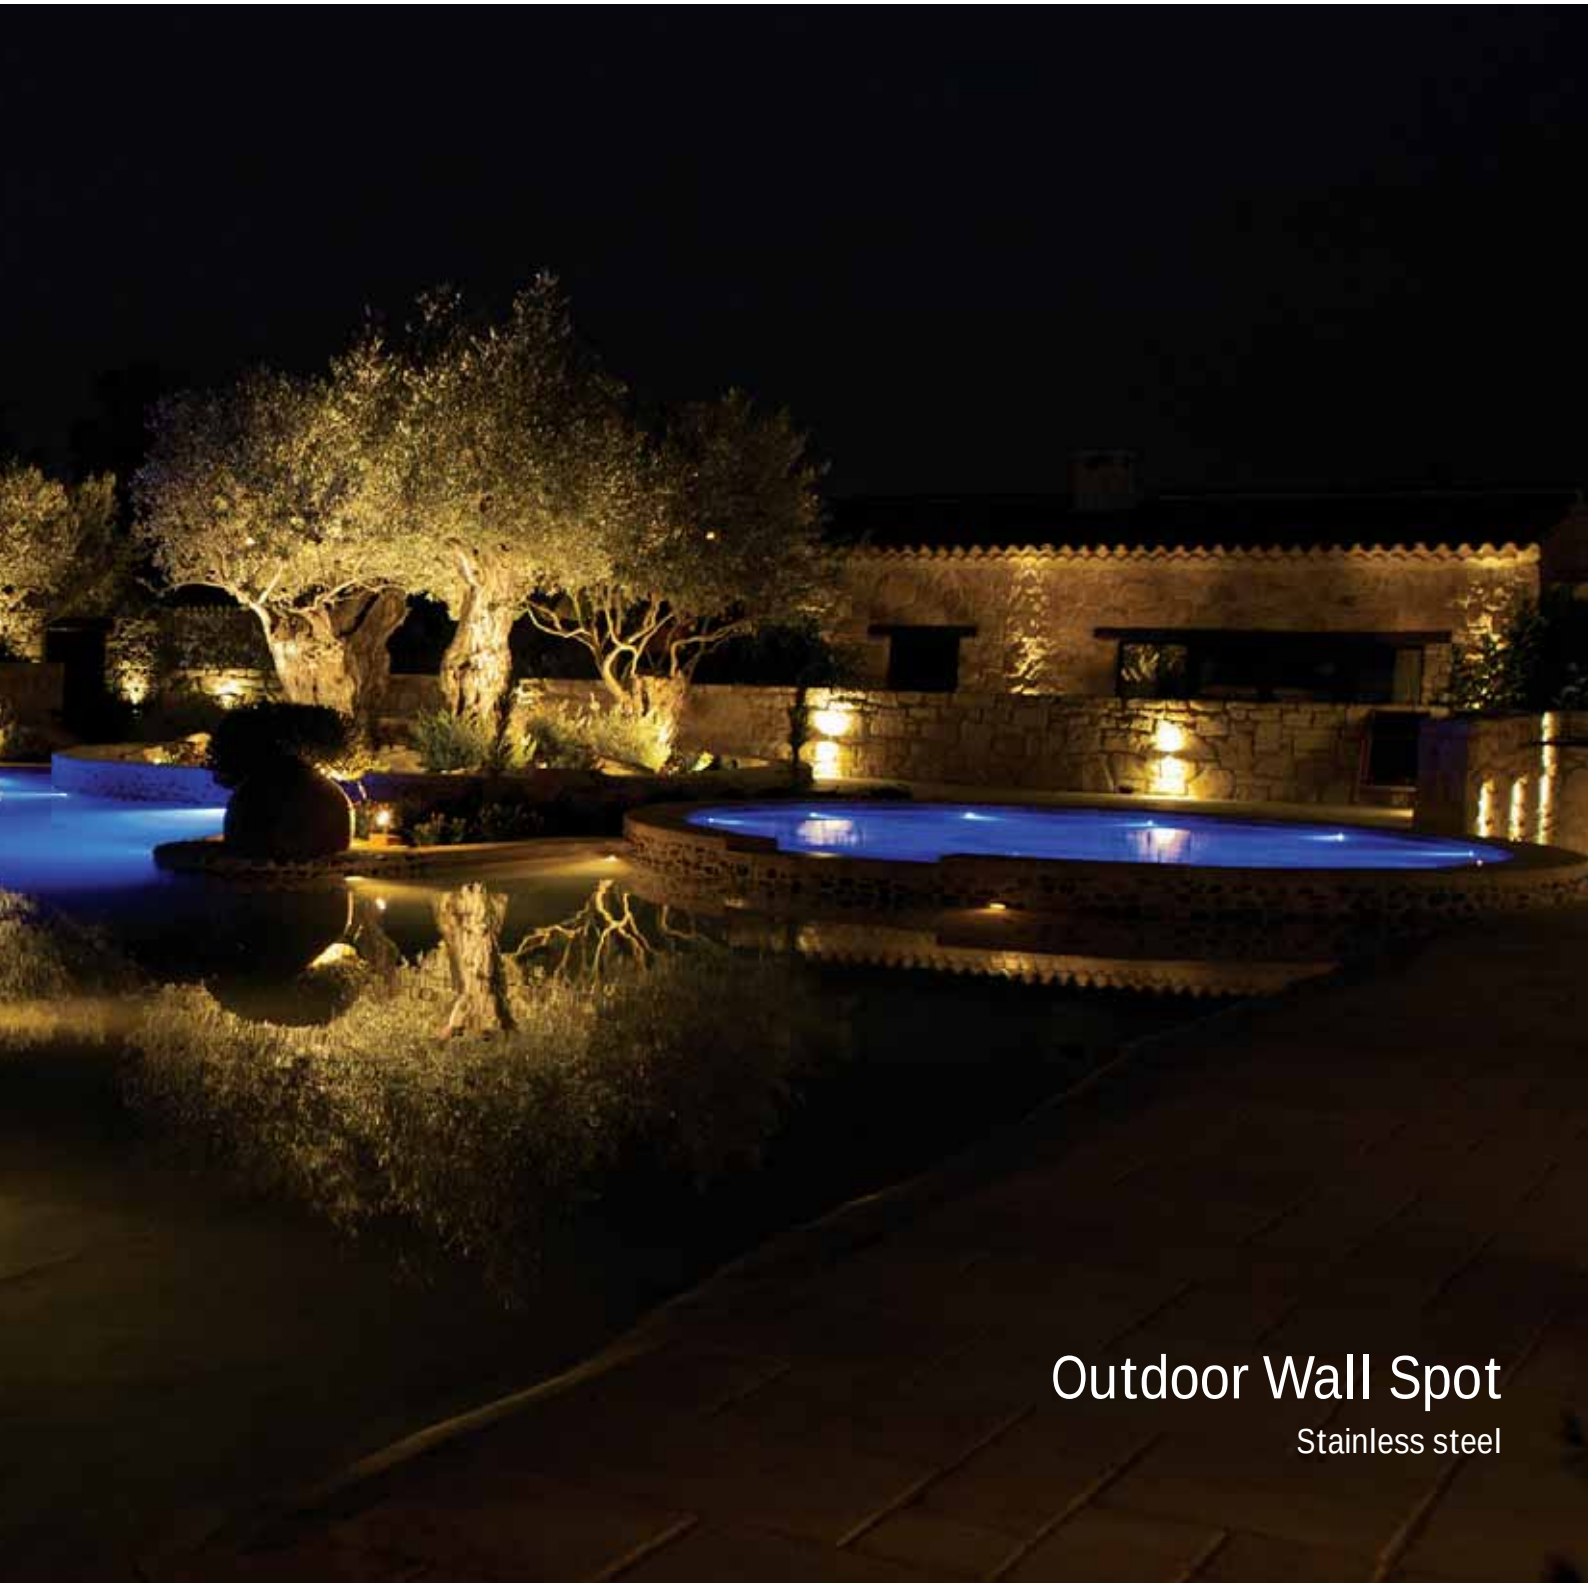

Outdoor Wall Spot

Stainless steel




67030 | 2x35W | MR16 | GU10 | Stainless steel 304

IP44

CE



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
67030	Stainless steel	2x35W	100-240V	⏚	12	-





14

Wall & Ceiling LED

Pages 313-354

COB LED | SMD LED | LED

Die cast | Natural aluminium | Gypsum | ABS + PC

IP20 IP40 IP54 IP65

ADJUSTABLE ADJUSTABLE DIMMABLE DARK LIGHT QUICK FIX 80 CRI 85 CRI






The Decorative LED Wall Lights

Gypsum



60050 | 3W | LED | Gypsum

IP20







60052 | 3W | LED | Gypsum

IP20





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
60050/W	White	Warm white	3000K	3W	150lm	120V/240V	⏚	12	Complete with driver
60052/W	White	Warm white	3000K	3W	150lm	120V/240V	⏚	8	Complete with driver



60048/W

60044/W

60046/W

The Decorative LED Wall Lights

Gypsum




60046 | 2x2W | LED | Gypsum

IP20

CE



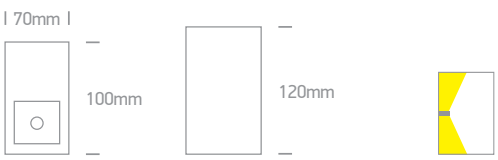




60044 | 2x2W | LED | Gypsum

IP20

CE



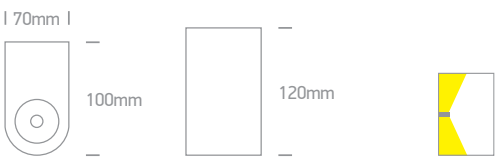





60048 | 2x2W | LED | Gypsum

IP20

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
60046/W	White	Warm white	3000K	2x2W	200lm	120V/240V		18	Complete with driver
60044/W	White	Warm white	3000K	2x2W	200lm	120V/240V		18	Complete with driver
60048/W	White	Warm white	3000K	2x2W	200lm	120V/240V		9	Complete with driver



Display & Reading Spots


Die cast



65101A | 1W | LED | Die cast

IP20

ADJUSTABLE DIMMABLE QUICK FIX CE








60006 | 1W | LED | Die cast


IP20

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Beam Angle	Input	Class					Notes
65101A/G/D/15	Grey	Daylight	6000K	1W	15°	350mA	III	20cm	10mm	30mm	100	Requires 350mA driver
65101A/G/W/15	Grey	Warm white	3000K	1W	15°	350mA	III	20cm	10mm	30mm	100	Requires 350mA driver
60006/G/D	Grey	Daylight	6000K	1W	15°	100-240V		-	-	-	50	Complete with driver

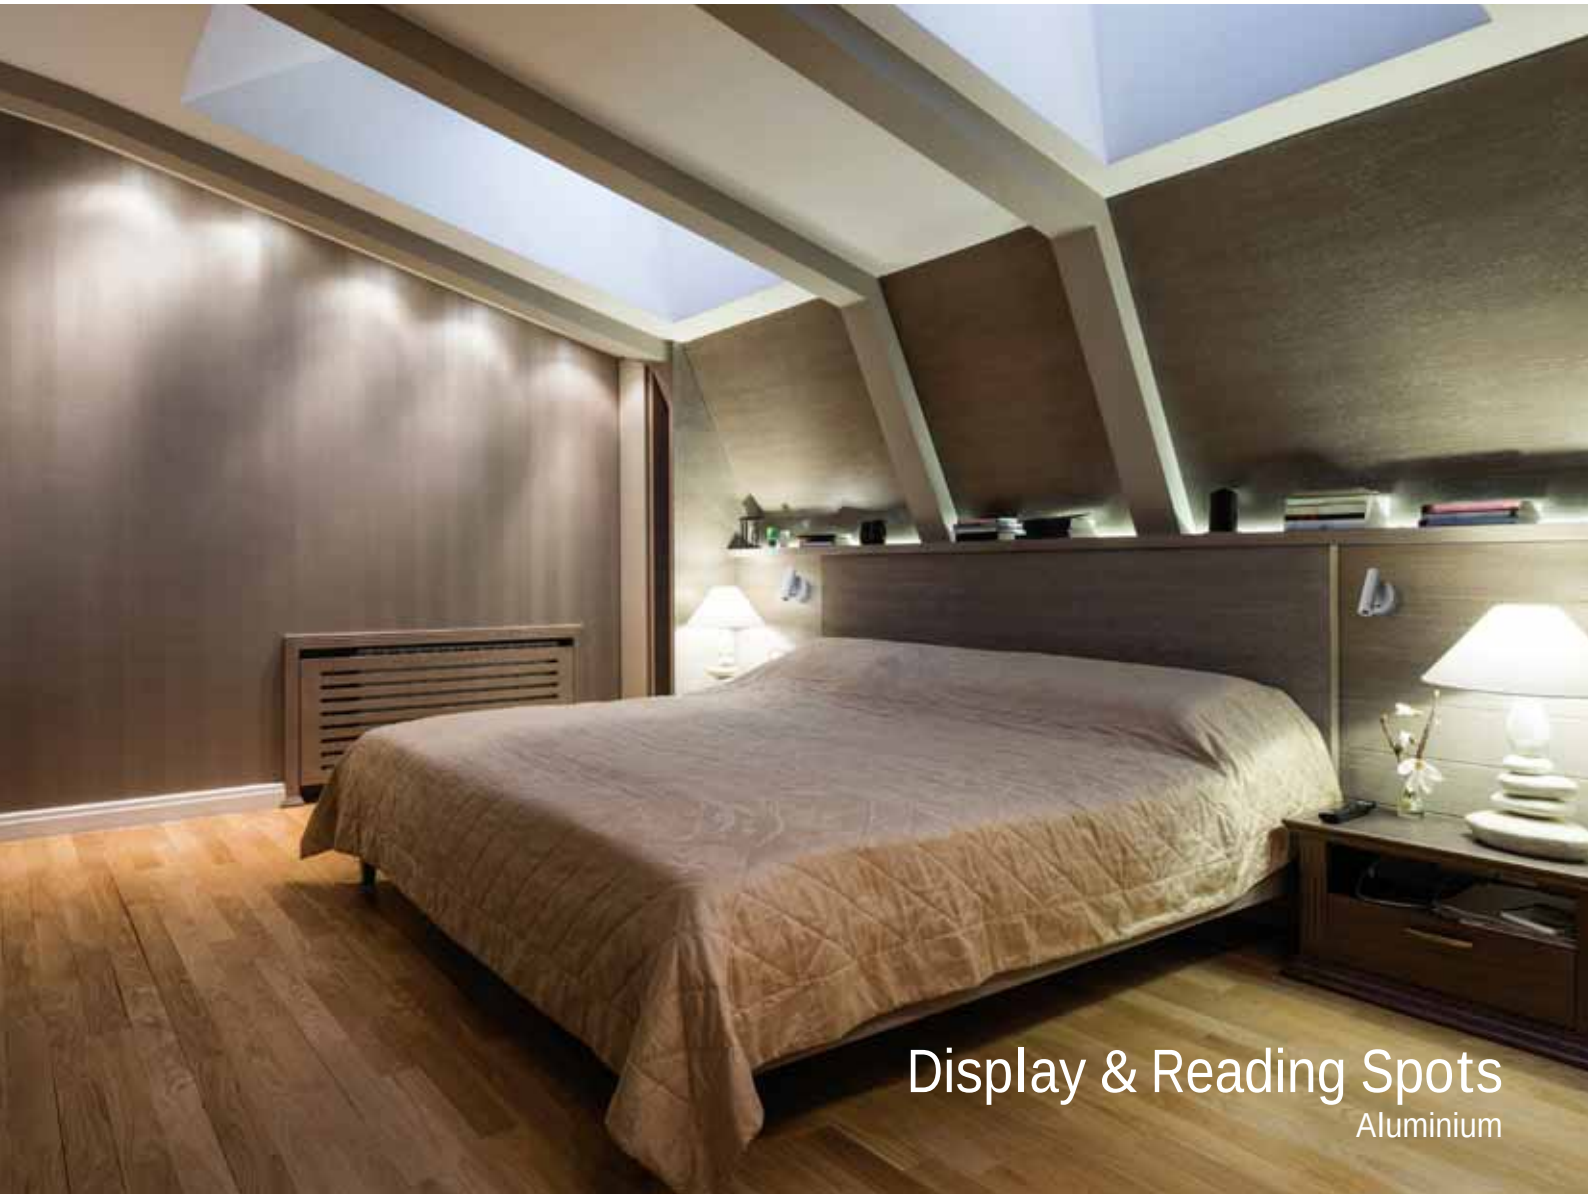

Display & Reading Spots
Aluminium



65738/W/W


65738 | 3W | LED | Aluminium

IP20 85 CRI

ADJUSTABLE CE



65738/AL/W








65738A | 3W | LED | Aluminium

IP20 85 CRI

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65738/AL/W	Aluminium	Warm white	3000K	3W	160lm	36°	100-240V		24	Complete with driver
65738/W/W	White	Warm white	3000K	3W	160lm	36°	100-240V		24	Complete with driver
65738A/W/W	White	Warm white	3000K	3W	160lm	36°	100-240V		24	Complete with driver



12107M/W/W



65107/W/W

The COB Adjustable Decorative Spots




65107 | 7W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE



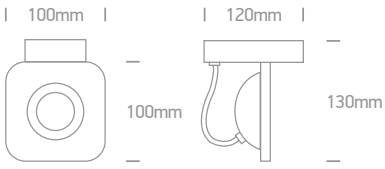




12107M | 7W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE



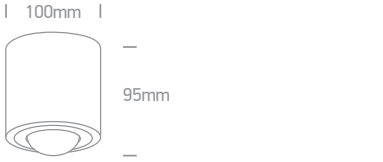




12109M | 9W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE



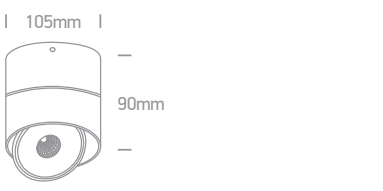

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65107/W/W	White	Warm white	3000K	7W	594lm	35°	100-240V		12	Complete with driver
12107M/W/W	White	Warm white	3000K	7W	461lm	35°	100-240V		30	Complete with driver
12109M/W/W	White	Warm white	3000K	9W	765lm	40°	230V		20	Complete with driver



65110A/W/W

65110B/W/W

65110C/W/W

The COB Moving Heads Spots

Die cast




65110A | 10W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE



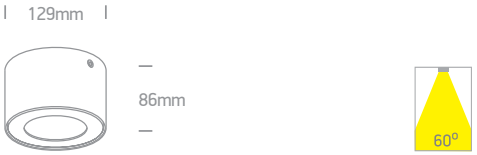




65110C | 2x10W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE







65110D | 4x10W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE








65110B | 10W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
65110A/W/W	White	Warm white	3000K	10W	900lm	60°	230V		12	Complete with driver
65110C/W/W	White	Warm white	3000K	2x10W	2x900lm	60°	230V		10	Complete with driver
65110D/W/W	White	Warm white	3000K	4x10W	4x900lm	60°	230V		4	Complete with driver
65110B/W/W	White	Warm white	3000K	10W	900lm	60°	230V		10	Complete with driver






12109LA | 9W | COB LED | Die cast

IP20 80 CRI

ADJUSTABLE CE










12112LA | 12W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE










12107F | 7W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12109LA/W/W	White	Warm white	3000K	9W	700lm	25°	230V		24	Complete with driver
12112LA/W/W	White	Warm white	3000K	12W	740lm	30°	230V		20	Complete with driver
12107F/W/W	White	Warm white	3000K	7W	565lm	35°	100-240V		12	Complete with driver


62401AL/D/15


60008/AL/D


60008A/AL/W

Indoor Mini Series


Natural aluminium



60008A | 1W | LED | Natural aluminium

IP20

CE






60008 | 2x1W | LED | Natural aluminium

IP20

CE






65102 | 1W | LED | Natural aluminium

IP20 ADJUSTABLE

CE

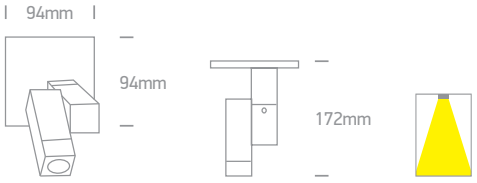




62401AL | 4x1W | LED | Natural aluminium


IP20 ADJUSTABLE

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
60008A/AL/W	Aluminium	Warm white	3000K	1W	100-240V		50	Complete with driver
60008A/AL/BL	Aluminium	Blue	-	1W	100-240V		50	Complete with driver
60008/AL/D	Aluminium	Daylight	6000K	2x1W	100-240V		50	Complete with driver
60008/AL/BL	Aluminium	Blue	-	2x1W	100-240V		50	Complete with driver
65102/D	Aluminium	Daylight	6000K	1W	100-240V		20	Complete with driver
65102/W	Aluminium	Warm white	3000K	1W	100-240V		20	Complete with driver
62401AL/D/15	Aluminium	Daylight	6000K	4x1W	100-240V		20	Complete with driver
62401AL/W/15	Aluminium	Warm white	3000K	4x1W	100-240V		20	Complete with driver

one

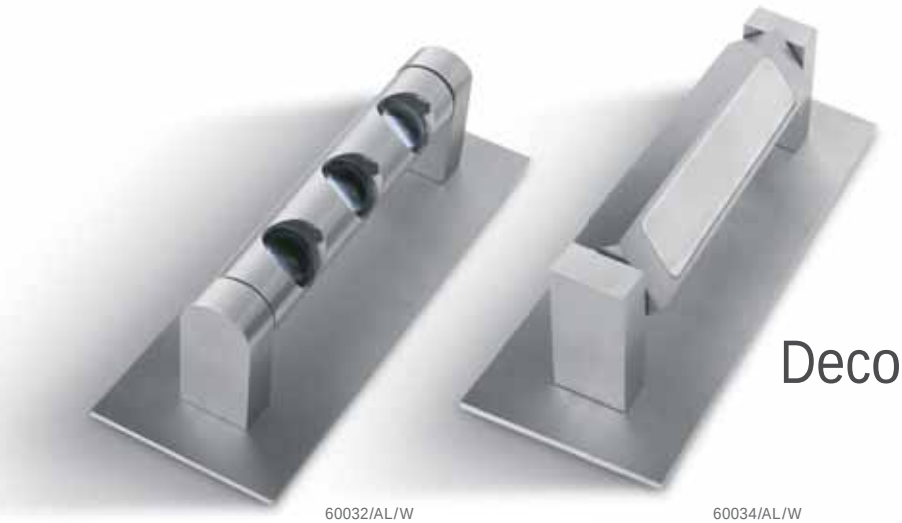

60032/AL/W 60034/AL/W

Decorative Indoor Wall Lights

Aluminium




6028 | 6W | LED | Aluminium

IP20

CE








60032 | 3x1W | LED | Natural aluminium

IP20 ADJUSTABLE

CE





60034 | 3x1W | LED | Natural aluminium

IP20 ADJUSTABLE

CE





67332 | 3,5W | LED | Aluminium

IP20

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
6028/AL/W	Aluminium	Warm white	3000K	6W	475lm	100-240V		20	Complete with driver
6028/W/W	White	Warm white	3000K	6W	475lm	100-240V		20	Complete with driver
60032/AL/W	Aluminium	Warm white	2700K	3x1W	-	100-240V		20	Complete with driver
60034/AL/W	Aluminium	Warm white	2700K	3x1W	-	100-240V		10	Complete with driver
67332/AL/W	Aluminium	Warm white	3000K	3,5W	230lm	100-240V		20	Complete with driver



Decorative Wall & Ceiling

Natural aluminium



12101 | 6x0,2W | LED | Natural aluminium + PC

IP20

CE









60004 | 6x0,2W | LED | Natural aluminium + PC

IP20

CE







60001 | 3x0,2W | LED | Natural aluminium

IP20

CE







60010 | 1W | LED | Natural aluminium

IP20

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
12101/AL/W	Aluminium	Warm white	3000K	6x0,2W	230V		24	Complete with driver
60004/AL/D	Aluminium	Daylight	6000K	6x0,2W	230V		20	Complete with driver
60004/AL/GR	Aluminium	Green	-	6x0,2W	230V		20	Complete with driver
60004/AL/R	Aluminium	Red	-	6x0,2W	230V		20	Complete with driver
60001/AL/D	Aluminium	Daylight	6000K	6x0,2W	230V		100	Complete with driver
Other available colours: **60001/AL/BL** Blue **60001/AL/GR** Green **60001/AL/R** Red **60001/AL/Y** Yellow								
60010/AL/D	Aluminium	Daylight	6000K	1W	100-240V		100	Complete with driver
60010/AL/BL	Aluminium	Blue	-	1W	100-240V		100	Complete with driver



LED Illuminated Signs




60002 | 3x0,2W | LED | Natural aluminium + PC

Laser engraving at extra cost

IP20

CE

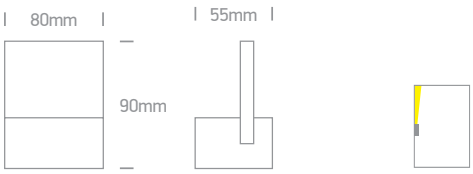




67364 | 8W | SMD LED | Die cast + PC

IP54 80 CRI

CE

Automatic day/night operation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
60002/AL/D	Aluminium	Daylight	6000K	3x0,2W	-	230V		20	Complete with driver
60002/AL/BL	Aluminium	Blue	-	3x0,2W	-	230V		20	Complete with driver
67364/G/W	Grey	Warm white	3000K	8W	450lm	230V		8	Photocell



Outdoor Wall Washers
Aluminium




67346/W/W | 12W | SMD 2835 | Aluminium

IP65 80 CRI

CE








67346/AN/W | 12W | SMD 2835 | Aluminium

IP65 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67346/W/W	White	Warm white	3000K	12W	840lm	230V	⏚	8	Complete with driver
67346/AN/W	Anthracite	Warm white	3000K	12W	840lm	230V	⏚	8	Complete with driver



12106C/W/W

12110D/W/W

12111L/W/W

The COB Indoor Round Cylinders




12106C | 6W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE











12110D | 10W | COB LED | Die cast

IP20 85 CRI

ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12106C/W/W	White	Warm white	3000K	6W	480lm	36°	230V		10	Complete with driver
12110D/W/W	White	Warm white	3000K	10W	800lm	36°	100-240V		18	Complete with driver





12106CA | 6W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE CE










12107AL | 7W | COB LED | Aluminium

IP20 80 CRI

ADJUSTABLE TRIAC DIMMABLE CE










12111L | 11W | COB LED | Metal

IP20 80 CRI

CE









12211L | 2x11W | COB LED | Metal

IP20 80 CRI

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12106CA/W/W	White	Warm white	3000K	6W	480lm	36°	230V		10	Complete with driver
12107AL/AL/W	Aluminium	Warm white	3000K	7W	480lm	38°	230V		20	Complete with dimmable driver
12111L/W/W	White	Warm white	3000K	11W	830lm	40°	230V		16	Complete with driver
12211L/W/W	White	Warm white	3000K	2x11W	2x830lm	40°	230V		8	Complete with drivers



The SMD Cylinders


Aluminium



12115L | 15W | SMD LED | Aluminium

IP40 80 CRI

CE








12125L | 25W | SMD LED | Aluminium

IP40 80 CRI

CE








12135L | 35W | SMD LED | Aluminium

IP40 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
12115L/W/W	White	Warm white	3000K	15W	1280lm	230V		36	Complete with driver
12125L/W/W	White	Warm white	3000K	25W	2050lm	230V		36	Complete with driver
12135L/W/W	White	Warm white	3000K	35W	3000lm	230V		12	Complete with driver



The COB LED Indoor Cylinders


Aluminium



12115LA | 15W | COB LED | Aluminium

IP20 80 CRI

CE








12125LA | 25W | COB LED | Aluminium

IP20 80 CRI

CE








12130LA | 30W | COB LED | Aluminium

IP20 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
12115LA/W/W	White	Warm white	3000K	15W	1300lm	50°	230V		36	Complete with driver
12125LA/W/W	White	Warm white	3000K	25W	2100lm	50°	230V		18	Complete with driver
12130LA/W/W	White	Warm white	3000K	30W	2500lm	50°	230V		12	Complete with driver




COB Outdoor Ceiling Cylinders



67380 | 10W | COB LED | Aluminium

IP54 80 CRI

CE








67380A | 25W | COB LED | Die cast

IP54 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67380/W/W	White	Warm white	3000K	10W	700lm	60°	100-240V		24	Complete with driver
67380A/W/W	White	Warm white	3000K	25W	1800lm	60°	100-240V		12	Complete with driver



Outdoor Ceiling Cylinders

Die cast



67138C/G | 6x1W | LED | Die cast

IP54

CE







67138C/AN/W

67138C | 6W | COB LED | Die cast

IP54 80 CRI

CE



67138C/W/W







67138D/G/D | 6x1W | LED | Die cast

IP54

CE







67138D/AN/W


67138D | 6W | COB LED | Die cast

IP54 80 CRI

CE



67138D/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67138C/G/D	Grey	Daylight	6000K	6x1W	-	-	230V		12	Complete with driver
67138C/G/W	Grey	Warm white	3000K	6x1W	-	-	230V		12	Complete with driver
67138C/W/W	White	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with driver
67138C/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with driver
67138D/G/D	Grey	Daylight	6000K	6x1W	-	-	230V		12	Complete with driver
67138D/G/W	Grey	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with driver
67138D/W/W	White	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with driver
67138D/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V		18	Complete with driver



Outdoor Wall Cylinders


Down beam



67136E/G/D | 3x1W | LED | Die cast

IP54










67138E/G/D | 6x1W | LED | Die cast

IP54










67138E/AN/W

67138E | 6W | COB LED | Die cast

IP54 80 CRI



67138E/W/W








67138F/AN/W

67138F | 6W | COB LED | Die cast

IP54 80 CRI



67138F/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67136E/G/D	Grey	Daylight	6000K	3x1W	-	-	230V		24	Complete with driver
67138E/G/D	Grey	Daylight	6000K	6x1W	-	-	230V		12	Complete with driver
67138E/W/W	White	Warm white	3000K	6W	440lm	35°	100-240V		12	Complete with driver
67138E/G/W	Grey	Warm white	3000K	6W	440lm	35°	100-240V		12	Complete with driver
67138E/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V		12	Complete with driver
67138F/W/W	White	Warm white	3000K	6W	440lm	35°	100-240V		12	Complete with driver
67138F/G/W	Grey	Warm white	3000K	6W	440lm	35°	100-240V		12	Complete with driver
67138F/AN/W	Anthracite	Warm white	3000K	6W	440lm	35°	100-240V		12	Complete with driver



Outdoor Wall Cylinders

Up & down beam




67136 | 6x1W | LED | Die cast

IP54

CE









67138/AN/W


67138 | 2x6W | COB LED | Die cast

IP54 80 CRI

CE



67138/W/W







67138A/AN/W


67138A | 2x6W | COB LED | Die cast

IP54 80 CRI

CE



67138A/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67136/G/D	Grey	Daylight	6000K	6x1W	-	-	230V		12	Complete with driver
67136/G/W	Grey	Warm white	3000K	6x1W	-	-	230V		12	Complete with driver
67138/W/W	White	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with driver
67138/G/W	Grey	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with driver
67138/AN/W	Anthracite	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with driver
67138A/W/W	White	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with driver
67138A/G/W	Grey	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with driver
67138A/AN/W	Anthracite	Warm white	3000K	2x6W	2x440lm	35°	230V		12	Complete with driver


67374A/W/W


67374/AN/W


67342/G/W

Outdoor Wall Up & Down Lights

Die cast




67356 | 5W | LED | Die cast

IP54

CE










67342 | 4x3W | LED | Die cast

IP54 80 CRI

CE










67374 | 2x3W | SMD 5630 | Die cast

IP54 80 CRI

CE










67374A | 2x6W | SMD 2835 | Die cast

IP54 80 CRI

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67356/W/W	White	Warm white	3000K	5W	170lm	230V		18	-
67356/G/W	Grey	Warm white	3000K	5W	170lm	230V		18	-
67342/G/W	Grey	Warm white	3000K	4x3W	350lm	230V		12	Complete with driver
67374/W/W	White	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with driver
67374/AN/W	Anthracite	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with driver
67374A/W/W	White	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with driver
67374A/AN/W	Anthracite	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with driver



Outdoor Wall Up & Down Lights




67362B | 9W | SMD LED | Die cast

IP54 80 CRI

CE








67362C | 2x4,5W | SMD 3014 | Die cast

IP54 80 CRI

CE








67392 | 7W | SMD 2835 | ABS + PC

IP65 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67362B/W/W	White	Warm white	3000K	9W	600lm	230V		12	Complete with driver
67362B/AN/W	Anthracite	Warm white	3000K	9W	600lm	230V		12	Complete with driver
67362C/W/W	White	Warm white	3000K	2x4,5W	2x315lm	230V		12	Complete with driver
67362C/AN/W	Anthracite	Warm white	3000K	2x4,5W	2x315lm	230V		12	Complete with driver
67392/W/W	White	Warm white	3000K	7W	400lm	230V		20	Complete with driver
67392/AN/W	Anthracite	Warm white	3000K	7W	400lm	230V		20	Complete with driver



Outdoor Slim Oval Range

Up & down beam



67378 | 2x3W | SMD 5630 | Die cast

IP54 80 CRI

CE








67378A | 2x6W | SMD 2835 | Die cast

IP54 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67378/W/W	White	Warm white	3000K	2x3W	2x210lm	230V	⏚	24	Complete with driver
67378/AN/W	Anthracite	Warm white	3000K	2x3W	2x210lm	230V	⏚	24	Complete with driver
67378A/W/W	White	Warm white	3000K	2x6W	2x420lm	230V	⏚	12	Complete with driver
67378A/AN/W	Anthracite	Warm white	3000K	2x6W	2x420lm	230V	⏚	12	Complete with driver



Outdoor Slim Range

Up & down beam



67376 | 2x3W | SMD 2835 | Die cast

IP54 80 CRI

CE








67376A | 2x6W | SMD 2835 | Die cast

IP54 80 CRI

CE








6026A | 3x3W | LED | Aluminium


IP54

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67376/W/W	White	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with driver
67376/AN/W	Anthracite	Warm white	3000K	2x3W	2x210lm	230V		24	Complete with driver
67376A/W/W	White	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with driver
67376A/AN/W	Anthracite	Warm white	3000K	2x6W	2x420lm	230V		12	Complete with driver
6026A/AL/W	Aluminium	Warm white	3000K	2x3W	-	230V		12	Complete with driver

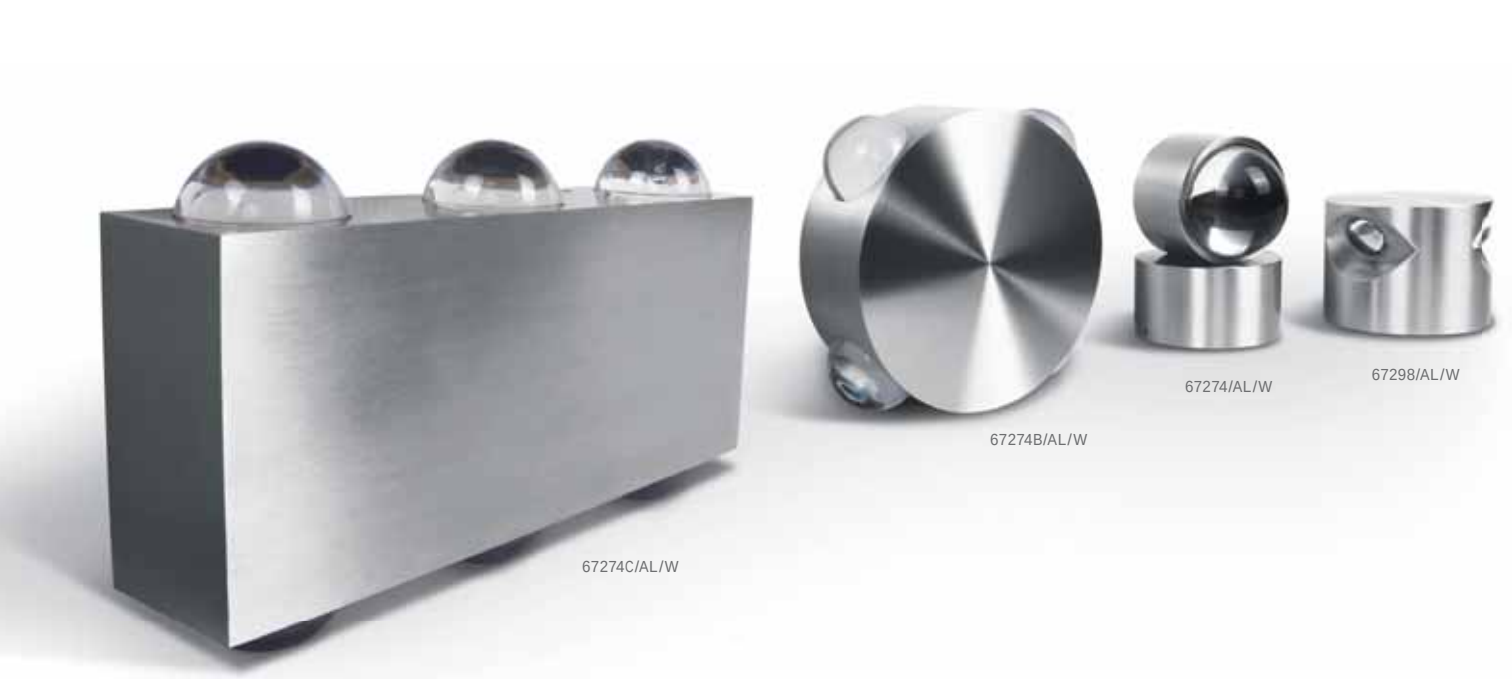

Indoor/Outdoor Wall Lines


Natural aluminium



67298 | 3x3W | LED | Natural aluminium

IP54










67274 | 4W | LED | Natural aluminium

IP54










67274A | 2x1W | LED | Natural aluminium

IP54







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67298/AL/W	Aluminium	Warm white	3000K	3x3W	450lm	100-240V		20	Complete with driver
67274/AL/W	Aluminium	Warm white	3000K	4W	150lm	100-240V		20	Complete with driver
67274A/AL/W	Aluminium	Warm white	3000K	2x1W	100lm	100-240V		12	Complete with driver
67274A/AL/BL	Aluminium	Blue	-	2x1W	-	100-240V		12	Complete with driver



Indoor/Outdoor Wall Lines


Natural aluminium




67274B | 4x1,5W | LED | Natural aluminium

IP54

CE








67274C | 6x1W | LED | Natural aluminium

IP54

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67274B/AL/W	Aluminium	Warm white	3000K	4x1,5W	200lm	100-240V	⏚	12	Complete with driver
67274C/AL/W	Aluminium	Warm white	3000K	6x1W	300lm	230V	⏚	20	Complete with driver



Indoor/Outdoor Adjustable Beams




67340 | 2x3W | LED | Adjustable beam | Aluminium

IP54

CE









67340A/W/W


67340A | 2x3W | LED | Adjustable beam | Die cast

IP54 80 CRI

CE



67340A/AN/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67340/AL/W	Aluminium	Warm white	3000K	2x3W	500lm	100-240V	⏚	20	Complete with driver
67340A/W/W	White	Warm white	3000K	2x3W	2x210lm	230V	⏚	8	Complete with driver
67340A/G/W	Grey	Warm white	3000K	2x3W	2x210lm	230V	⏚	8	Complete with driver
67340A/AN/W	Anthracite	Warm white	3000K	2x3W	2x210lm	230V	⏚	8	Complete with driver



Outdoor Wall Dark Lights

Die cast




67398 | 3W | SMD 1208 | Die cast

IP54 80 CRI

DARK LIGHT CE










67398A | 2x3W | LED | Die cast

IP54 80 CRI

DARK LIGHT CE











67398C | 2x3W | LED | Die cast

IP54 80 CRI


DARK LIGHT CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67398/W/W	White	Warm white	3000K	3W	200lm	100-240V		24	Complete with driver
67398/AN/W	Anthracite	Warm white	3000K	3W	200lm	100-240V		24	Complete with driver
67398A/W/W	White	Warm white	3000K	2x3W	2x200lm	100-240V		12	Complete with driver
67398A/AN/W	Anthracite	Warm white	3000K	2x3W	2x200lm	100-240V		12	Complete with driver
67398C/W/W	White	Warm white	3000K	2x3W	2x200lm	100-240V		18	Complete with driver
67398C/AN/W	Anthracite	Warm white	3000K	2x3W	2x200lm	100-240V		18	Complete with driver

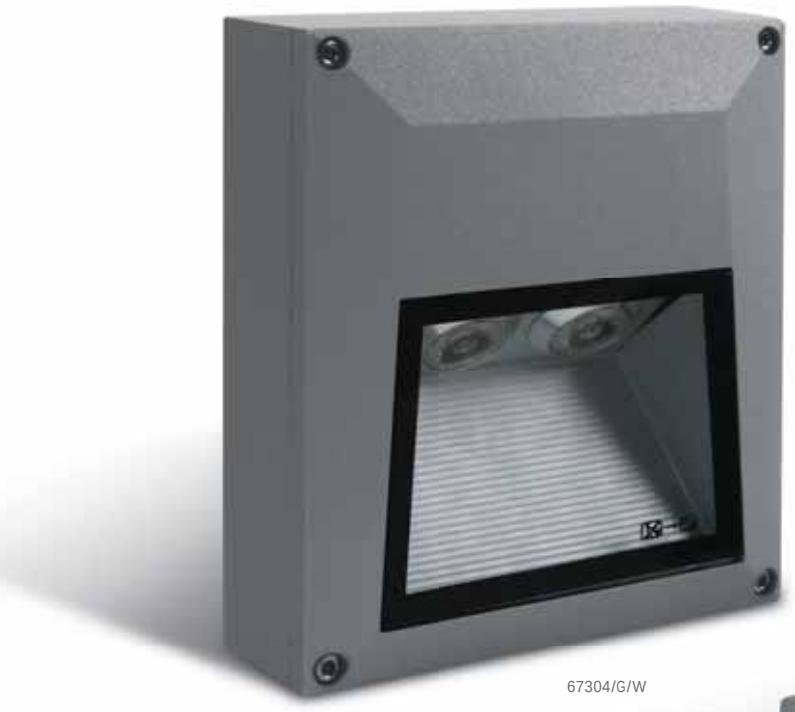

67304/G/W

Outdoor Wall Lights

Die cast



67124/G/D




67124 | 2x1W | LED | Die cast

IP54

CE








67304 | 2x1W | LED | Die cast

IP54

CE



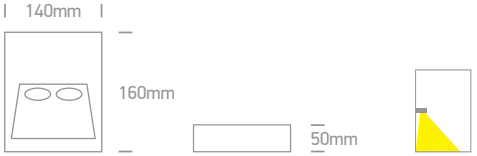

Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
67124/G/D	Grey	Daylight	6000K	2x1W	230V		18	Complete with driver
67124/G/W	Grey	Warm white	3000K	2x1W	230V		18	Complete with driver
67124/G/BL	Grey	Blue	-	2x1W	230V		18	Complete with driver
67304/G/W	Grey	Warm white	3000K	2x1W	100-240V		12	Complete with driver



Down Illumination Wall Lights

ABS + PC



67386A/W/W


67386A | 1,5W | SMD 2835 | ABS + PC

IP65 80 CRI

DARK LIGHT CE



67386A/AN/W





67386C/W/W


67386C | 4W | SMD 2835 | ABS + PC

IP65 80 CRI

DARK LIGHT CE



67386C/AN/W





67396/W/W


67396 | 6W | SMD 2835 | ABS + PC

IP65 80 CRI

CE



67396/AN/W





67396A/W/W


67396A | 6W | SMD 2835 | Sensor | ABS + PC

IP65 80 CRI

CE



67396A/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67386A/W/W	White	Warm white	3000K	1,5W	80lm	230V	☐	40	-
67386A/AN/W	Anthracite	Warm white	3000K	1,5W	80lm	230V	☐	40	-
67386C/W/W	White	Warm white	3000K	4W	220lm	230V	☐	20	-
67386C/AN/W	Anthracite	Warm white	3000K	4W	220lm	230V	☐	20	-
67396/W/W	White	Warm white	3000K	6W	300lm	230V	☐	20	-
67396/AN/W	Anthracite	Warm white	3000K	6W	300lm	230V	☐	20	-
67396A/W/W	White	Warm white	3000K	6W	300lm	230V	☐	20	-
67396A/AN/W	Anthracite	Warm white	3000K	6W	300lm	230V	☐	20	-



Outdoor General Lighting

ABS + PC



67394B/W/W


67394B | 3W | SMD 3014 | ABS + PC

IP65 80 CRI

CE



67394B/AN/W





67394A/W/W


67394A | 3W | SMD 3014 | ABS + PC

IP65 80 CRI

CE



67394A/AN/W





67394/W/W


67394 | 3W | SMD 3014 | ABS + PC

IP65 80 CRI

CE



67394/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67394B/W/W	White	Warm white	3000K	3W	185lm	230V		40	-
67394B/AN/W	Anthracite	Warm white	3000K	3W	185lm	230V		40	-
67394A/W/W	White	Warm white	3000K	3W	190lm	230V		40	-
67394A/AN/W	Anthracite	Warm white	3000K	3W	190lm	230V		40	-
67394/W/W	White	Warm white	3000K	3W	180lm	230V		24	-
67394/AN/W	Anthracite	Warm white	3000K	3W	180lm	230V		24	-



67388A/W/W

67388B/AN/W

Outdoor Dark Lights

ABS + PC



67388A/W/W


67388A | 1,5W | SMD 3014 | ABS + PC

IP65 80 CRI

DARK LIGHT CE



67388A/AN/W





67388B/W/W


67388B | 1W | SMD 3014 | ABS + PC

IP65 80 CRI

DARK LIGHT CE



67388B/AN/W





67388C/W/W


67388C | 2W | SMD 3014 | ABS + PC

IP65 80 CRI

DARK LIGHT CE



67388C/AN/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67388A/W/W	White	Warm white	3000K	1,5W	55lm	230V	☐	40	-
67388A/AN/W	Anthracite	Warm white	3000K	1,5W	55lm	230V	☐	40	-
67388B/W/W	White	Warm white	3000K	1W	50lm	230V	☐	40	-
67388B/AN/W	Anthracite	Warm white	3000K	1W	50lm	230V	☐	40	-
67388C/W/W	White	Warm white	3000K	2W	65lm	230V	☐	24	-
67388C/AN/W	Anthracite	Warm white	3000K	2W	65lm	230V	☐	24	-



Round Indoor/Outdoor Wall Dark Lights

Die cast



67359/AN/W

67359 | 3W | SMD 5630 | Die cast

IP54 80 CRI

DARK LIGHT CE


67359/W/W





67360/AN/W

67360 | 9W | SMD 5630 | Die cast

IP54 80 CRI

DARK LIGHT CE


67360/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67359/W/W	White	Warm white	3000K	3W	200lm	100-240V		30	Complete with driver
67359/AN/W	Anthracite	Warm white	3000K	3W	200lm	100-240V		30	Complete with driver
67360/W/W	White	Warm white	3000K	9W	350lm	230V		12	Complete with driver
67360/AN/W	Anthracite	Warm white	3000K	9W	350lm	230V		12	Complete with driver



Square Indoor/Outdoor Wall Dark Lights

Die cast



67359A/AN/W


67359A | 3W | SMD 5630 | Die cast

IP54 80 CRI

DARK LIGHT CE



67359A/W/W





67360A/AN/W


67360A | 9W | SMD 5630 | Die cast

IP54 80 CRI

DARK LIGHT CE



67360A/W/W





67359B/AN/W


67359B | 6W | SMD 2835 | Die cast

IP54 80 CRI

DARK LIGHT CE



67359B/W/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67359A/W/W	White	Warm white	3000K	3W	200lm	100-240V		30	Complete with driver
67359A/AN/W	Anthracite	Warm white	3000K	3W	200lm	100-240V		30	Complete with driver
67360A/W/W	White	Warm white	3000K	9W	350lm	230V		12	Complete with driver
67360A/AN/W	Anthracite	Warm white	3000K	9W	350lm	230V		12	Complete with driver
67359B/W/W	White	Warm white	3000K	6W	400lm	230V		24	Complete with driver
67359B/AN/W	Anthracite	Warm white	3000K	6W	400lm	230V		24	Complete with driver



Indoor/Outdoor Wall Lines

Die cast




67170 | 3W | LED | Die cast

IP54

CE










67172 | 2x3W | LED | Die cast

IP54

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
67170/G/BL	Grey	Blue	-	3W	100-240V		40	Complete with driver
67172/G/W	Grey	Warm white	3000K	2x3W	100-240V		20	Complete with driver
67172/G/BL	Grey	Blue	-	2x3W	100-240V		20	Complete with driver



Indoor/Outdoor Wall Lines

Die cast




67354 | 2x3W | LED | Die cast

IP54

CE



Use provided accessories to change to narrow beam.








67308 | 2x4W | LED | Die cast

IP54

DARK LIGHT

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67354/G/W	Grey	Warm white	3000K	2x3W	182lm	100-240V		12	Complete with driver
67308/G/W	Grey	Warm white	3000K	2x4W	-	100-240V		12	Complete with driver



Indoor/Outdoor Wall Box


Die cast



67146 | 6x1W | LED | Die cast

IP54







Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
67146/G/D	Grey	Daylight	6000K	6x1W	230V		24	Complete with driver



Outdoor Wall Lights

Die cast



67174/G/D


67174 | 3W | LED | Die cast

IP54

CE



67174/W/D





67176/G/W


67176 | 3W | LED | Die cast

IP54

CE



67176/W/D



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
67174/W/D	White	Daylight	6000K	3W	230V		12	Complete with driver
67174/G/D	Grey	Daylight	6000K	3W	230V		12	Complete with driver
67174/G/W	Grey	Warm white	3000K	3W	230V		12	Complete with driver
67176/W/D	White	Daylight	6000K	3W	230V		12	Complete with driver
67176/G/W	Grey	Warm white	3000K	3W	230V		12	Complete with driver



67122/G/BL



67116/G/W

Outdoor Surface Round Points


Die cast



67122 | 1,5W | LED | Die cast

IP54

CE






67126 | 1,5W | LED | Die cast

IP54

CE





67128 | 1,5W | LED | Die cast

IP54

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
67122/G/BL	Grey	Blue	-	1,5W	230V		30	Complete with driver
67126/G/BL	Grey	Blue	-	1,5W	230V		30	Complete with driver
67128/G/D	Grey	Daylight	6000K	1,5W	230V		30	Complete with driver
67128/G/W	Grey	Warm white	3000K	1,5W	230V		30	Complete with driver
67128/G/BL	Grey	Blue	-	1,5W	230V		30	Complete with driver



Outdoor Surface Square Points


Die cast



67116 | 1,6W | LED | Die cast

IP54

CE






67118 | 1,6W | LED | Die cast

IP54

CE




Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
67116/G/W	Grey	Warm white	3000K	1,6W	230V		30	Complete with driver
67116/G/BL	Grey	Blue	-	1,6W	230V		30	Complete with driver
67118/G/BL	Grey	Blue	-	1,6W	230V		30	Complete with driver





60014C | 2x1W | LED | Die cast

IP44








60016B | 2x1W | LED | Die cast

IP44







60012A | 1W | LED | Die cast

IP44








60012B | 2x1W | LED | Die cast

IP44





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
60014C/G/BL	Grey	Blue	-	2x1W	12V AC	III	100	Use 12V AC transformer
60016B/G/W	Grey	Warm white	3000K	2x1W	12V AC	III	50	Use 12V AC transformer
60016B/G/BL	Grey	Blue	-	2x1W	12V AC	III	50	Use 12V AC transformer
60012A/G/D	Grey	Daylight	6000K	1W	12V AC	III	50	Use 12V AC transformer
60012A/G/W	Grey	Warm white	3000K	1W	12V AC	III	50	Use 12V AC transformer
60012A/G/BL	Grey	Blue	-	1W	12V AC	III	50	Use 12V AC transformer
60012B/G/BL	Grey	Blue	-	2x1W	12V AC	III	50	Use 12V AC transformer



Indoor/Outdoor Light Points

Natural aluminium



67220A | 1W | LED | Natural aluminium + acrylic

IP54

CE







67334 | 1W | LED | Natural aluminium

IP54

CE








67336 | 2x1W | LED | Natural aluminium

IP54

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67220A/AL/D	Aluminium	Daylight	6000K	1W	-	100-240V		20	Complete with driver
67334/AL/W	Aluminium	Warm white	3000K	1W	65lm	100-240V		20	Complete with driver
67336/AL/W	Aluminium	Warm white	3000K	2x1W	130lm	100-240V		20	Complete with driver





15

Plafo

Pages 357-386

HQI | 2G10 | 2G11 | E27 | Rx7s | SMD LED | LED

Die cast | Steel | Metal | PC

IP20 IP40 IP54 IP65

DIMMABLE DARK LIGHT 80 CRI





E27, PL & HQI Plafo

Steel



12220/MC

12220 | 2x20W | E27 | Steel

IP20

CE



12220/W



267mm

80mm





12226S | 2x26W | G24d3 | Steel

IP20

CE



267mm

80mm






12150S | 150W | HQI | Rx7s | Steel

IP20

CE



Suitable for 7612L
LED lamp.
(Remove ballast)



267mm

80mm



Order Code	Colour	Watts	Input	Class		Notes
12220/W	White	2x20W	100-240V		8	-
12220/MC	Brushed chrome	2x20W	100-240V		8	-
12226S/MC/1	Brushed chrome	2x26W	230V		8	Complete with ballast
12150S/W/1	White	150W	230V		8	Complete with ballast
12150S/MC/1	Brushed chrome	150W	230V		8	Complete with ballast



Square Plafo


Steel



62102 | 17W | SMD LED | Steel

IP20 80 CRI

CE






62104 | 2x24W | 2G11 | Steel

IP20

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
62102/MC	Brushed chrome	Warm white	3000K	17W	230V	⏚	5	Complete with driver
62104/MC	Brushed chrome	-	-	2x24W	230V	⏚	4	Complete with electronic ballast



T5 Circular Plafo

Metal + PC



62010 | 22W | T5C | 2GX13 | Metal + PC

IP20

CE







62010A | 55W | T5C | 2GX13 | Metal + PC

IP20

CE



9955A







Frosted ring



Blue ring



Orange ring



Violet ring

Order Code	Colour	Ring Colour	Watts	Input	Class		Notes
62010/G/F	Grey	Frosted	22W	230V		5	Complete with electronic ballast
62010/G/BL	Grey	Blue	22W	230V		5	Complete with electronic ballast
62010/G/OR	Grey	Orange	22W	230V		5	Complete with electronic ballast
62010/G/V	Grey	Violet	22W	230V		5	Complete with electronic ballast
62010A/G/OR	Grey	Orange	55W	230V		5	Complete with electronic ballast
62010A/G/V	Grey	Violet	55W	230V		5	Complete with electronic ballast

T5 Circular Plafo

Metal + PC



62010/G/OR

62012/G/V

62010/G/BL



62012 | 55W | T5C | 2GX13 | Metal + PC

IP20

CE



9955A







62014 | 55W | T5C | 2GX13 | Metal + PC

IP20

CE



9955A





Order Code	Colour	Ring Colour	Watts	Input	Class		Notes
62012/G/V	Grey	Violet	55W	230V		5	Complete with electronic ballast
62014/G	Grey	-	55W	230V		5	Complete with electronic ballast

The LED Plafo Range

Round



62024B/W



62024A | 14W | SMD LED | Metal + plastic

IP20

CE









62024B | 18W | SMD LED | Metal + plastic

IP20

CE










62024C | 26W | SMD LED | Metal + plastic

IP20

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62024A/W	White	Warm white	3000K	14W	850lm	230V		5	Complete with driver
62024B/W	White	Warm white	3000K	18W	1100lm	230V		5	Complete with driver
62024C/C	White	Cool white	4000K	26W	1600lm	230V		5	Complete with driver
62024C/W	White	Warm white	3000K	26W	1600lm	230V		5	Complete with driver

The LED Slim Plafo Range

Round



62022B/W/W




62022A | 12W | SMD LED | PC

IP20

CE










62022B | 15W | SMD LED | PC

IP20

CE










62022C | 24W | SMD LED | PC

IP20

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62022A/W/W	White	Warm white	3000K	12W	950lm	230V		5	Complete with driver
62022B/W/W	White	Warm white	3000K	15W	1250lm	230V		5	Complete with driver
62022C/W/W	White	Warm white	3000K	24W	2150lm	230V		4	Complete with driver



67284L/W/W



62018/G

The IP65 Polycarbonate Range



67284 | 28W | 2D | PC

IP65

CE



Optional grey ring.
Order code 67284R/G.







67284L/W/C | 25W | SMD LED | PC

67284LE/W/C Emergency version page 513

IP65 80 CRI

CE









67284L/W/W | 21W | SMD LED | PC

67284LE/W/W Emergency version page 513

IP65 80 CRI

CE










67284L/G | Plafo for LED board 67284LA | ABS + PC

67284LA | 14W | LED board for 67284L/G

IP65

CE







Order Code	Colour	Light colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67284/W	White	-	-	28W	-	230V		6	Complete with electronic ballast
67284L/W/C	White	Cool white	4000K	25W	1900lm	230V		12	Complete with driver
67284L/W/W	White	Warm white	3000K	21W	1650lm	230V		12	Complete with driver
67284L/G	Grey	-	-	-	-	100-240V		10	-
67284LA/D	White	Daylight	6000K	14W	1150lm	100-240V		20	LED board for 67284L



T5 Circular Plafo

Metal + PC



62018 | 22W | T5C | 2GX13 | Metal + PC

IP20

CE





62018A | 55W | T5C | 2GX13 | Metal + PC

IP20

CE



9955A



Order Code	Colour	Watts	Input	Class		Notes
62018/G	Grey	22W	230V	⏚	5	Complete with electronic ballast
62018A/W	White	55W	230V	⏚	5	Complete with electronic ballast

The LED Panel Plafo

Round



62115F/W/W



62130F/G/C



62115F/W/C

62115F | 16W | SMD LED | Die cast

IP40 80 CRI

CE



62115F/G/C





62130F/W/C

62130F | 30W | SMD LED | Die cast

Optional dimmable driver code 040060.

IP40 80 CRI

CE



62130F/G/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62115F/W/C	White	Cool white	4000K	16W	1118lm	100-240V	☐	10	Complete with driver
62115F/W/W	White	Warm white	3000K	16W	1006lm	100-240V	☐	10	Complete with driver
62115F/G/C	Grey	Cool white	4000K	16W	1118lm	100-240V	☐	10	Complete with driver
62130F/W/C	White	Cool white	4000K	30W	1997lm	100-240V	☐	10	Complete with driver
62130F/W/W	White	Warm white	3000K	30W	1797lm	100-240V	☐	10	Complete with driver
62130F/G/C	Grey	Cool white	4000K	30W	1997lm	100-240V	☐	10	Complete with driver

The LED Panel Plafo

Square



62122F/W/W

62130AF/G/C



62122F/W/W


62122F | 22W | SMD LED | Die cast

IP40 80 CRI

CE



62122F/G/C





62130AF/W/C

62130AF | 30W | SMD LED | Die cast


Optional dimmable driver code 040060.

IP40 80 CRI

CE



62130AF/G/C



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62122F/W/W	White	Warm white	3000K	22W	1490lm	100-240V		10	Complete with driver
62122F/G/C	Grey	Cool white	4000K	22W	1656lm	100-240V		10	Complete with driver
62130AF/W/C	White	Cool white	4000K	30W	2174lm	100-240V		10	Complete with driver
62130AF/W/W	White	Warm white	3000K	30W	1957lm	100-240V		10	Complete with driver
62130AF/G/C	Grey	Cool white	4000K	30W	2174lm	100-240V		10	Complete with driver






62140AE | 40W | SMD 2835 | Aluminium

IP40 80 CRI

CE







62140RE | 40W | SMD 2835 | Aluminium

IP40 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140AE/W/C	White	Cool white	4000K	40W	3600lm	230V	☐	4	Complete with driver
62140RE/W/C	White	Cool white	4000K	40W	3600lm	230V	☐	4	Complete with driver



LED Die Cast Panel Range




62140F | 40W | SMD LED | Die cast

IP40 80 CRI

CE



Suspension kit included.








62140AF | 40W | SMD LED | Die cast

IP40 80 CRI

CE



Suspension kit included.







62140RF | 40W | SMD 2016 | Die cast

IP40 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62140F/W/D	White	Daylight	6000K	40W	2800lm	100-240V		5	Complete with driver
62140F/W/C	White	Cool white	4000K	40W	2800lm	100-240V		5	Complete with driver
62140F/W/W	White	Warm white	3000K	40W	2520lm	100-240V		5	Complete with driver
62140AF/W/D	White	Daylight	6000K	40W	2850lm	100-240V		4	Complete with driver
62140AF/W/C	White	Cool white	4000K	40W	2850lm	100-240V		4	Complete with driver
62140AF/W/W	White	Warm white	3000K	40W	2560lm	100-240V		4	Complete with driver
62140RF/W/C	White	Cool white	4000K	40W	2700lm	100-240V		5	Complete with driver
62140RF/W/W	White	Warm white	3000K	40W	2700lm	100-240V		5	Complete with driver



The Ultra Slim LED Panel Plafo

Aluminium + PC




62018F | 18W | SMD 4014 | Aluminium + PC

IP40 80 CRI

CE








62018AF | 18W | SMD 4014 | Aluminium + PC

IP40 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62018F/W/C	White	Cool white	4000K	18W	1450lm	230V	⏚	20	Complete with driver
62018F/W/W	White	Warm white	3000K	18W	1400lm	230V	⏚	20	Complete with driver
62018AF/W/C	White	Cool white	4000K	18W	1450lm	230V	⏚	20	Complete with driver
62018AF/W/W	White	Warm white	3000K	18W	1400lm	230V	⏚	20	Complete with driver



62018AF/W/C

The Ultra Slim LED Panel Plafo

Aluminium + PC



62030F/W/C




62030F | 30W | SMD 4014 | Aluminium + PC

IP40 80 CRI

CE










62038F | 38W | SMD 4014 | Aluminium + PC

IP40 80 CRI

CE










62046F | 46W | SMD 4014 | Aluminium + PC

IP40 80 CRI

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
62030F/W/C	White	Cool white	4000K	30W	2400lm	230V		10	Complete with driver
62030F/W/W	White	Warm white	3000K	30W	2300lm	230V		10	Complete with driver
62038F/W/C	White	Cool white	4000K	38W	3000lm	230V		5	Complete with driver
62038F/W/W	White	Warm white	3000K	38W	2900lm	230V		5	Complete with driver
62046F/W/C	White	Cool white	4000K	46W	3600lm	230V		5	Complete with driver
62046F/W/W	White	Warm white	3000K	46W	3500lm	230V		5	Complete with driver



The E27 Plafo Outdoor Range

PC


67280/W


67280 | 18W | E27 | PC

IP65

CE


67280/G


67280/AN




67280A/W


67280A | 2x18W | E27 | PC

IP65

CE


67280A/G


67280A/AN




67282/AN


67282 | 18W | E27 | PC

IP65

CE


67282/W


67282/G




67282A/AN


67282A | 2x18W | E27 | PC

IP65


CE


67282A/W


67282A/G



Order Code	Colour	Watts	Input	Class		Notes
67280/W	White	18W	100-240V	☐	12	-
67280/G	Grey	18W	100-240V	☐	12	-
67280/AN	Anthracite	18W	100-240V	☐	12	-
67280A/W	White	2x18W	100-240V	☐	8	-
67280A/G	Grey	2x18W	100-240V	☐	8	-
67280A/AN	Anthracite	2x18W	100-240V	☐	8	-
67282/W	White	18W	100-240V	☐	12	-
67282/G	Grey	18W	100-240V	☐	12	-
67282/AN	Anthracite	18W	100-240V	☐	12	-
67282A/W	White	2x18W	100-240V	☐	8	-
67282A/G	Grey	2x18W	100-240V	☐	8	-
67282A/AN	Anthracite	2x18W	100-240V	☐	8	-

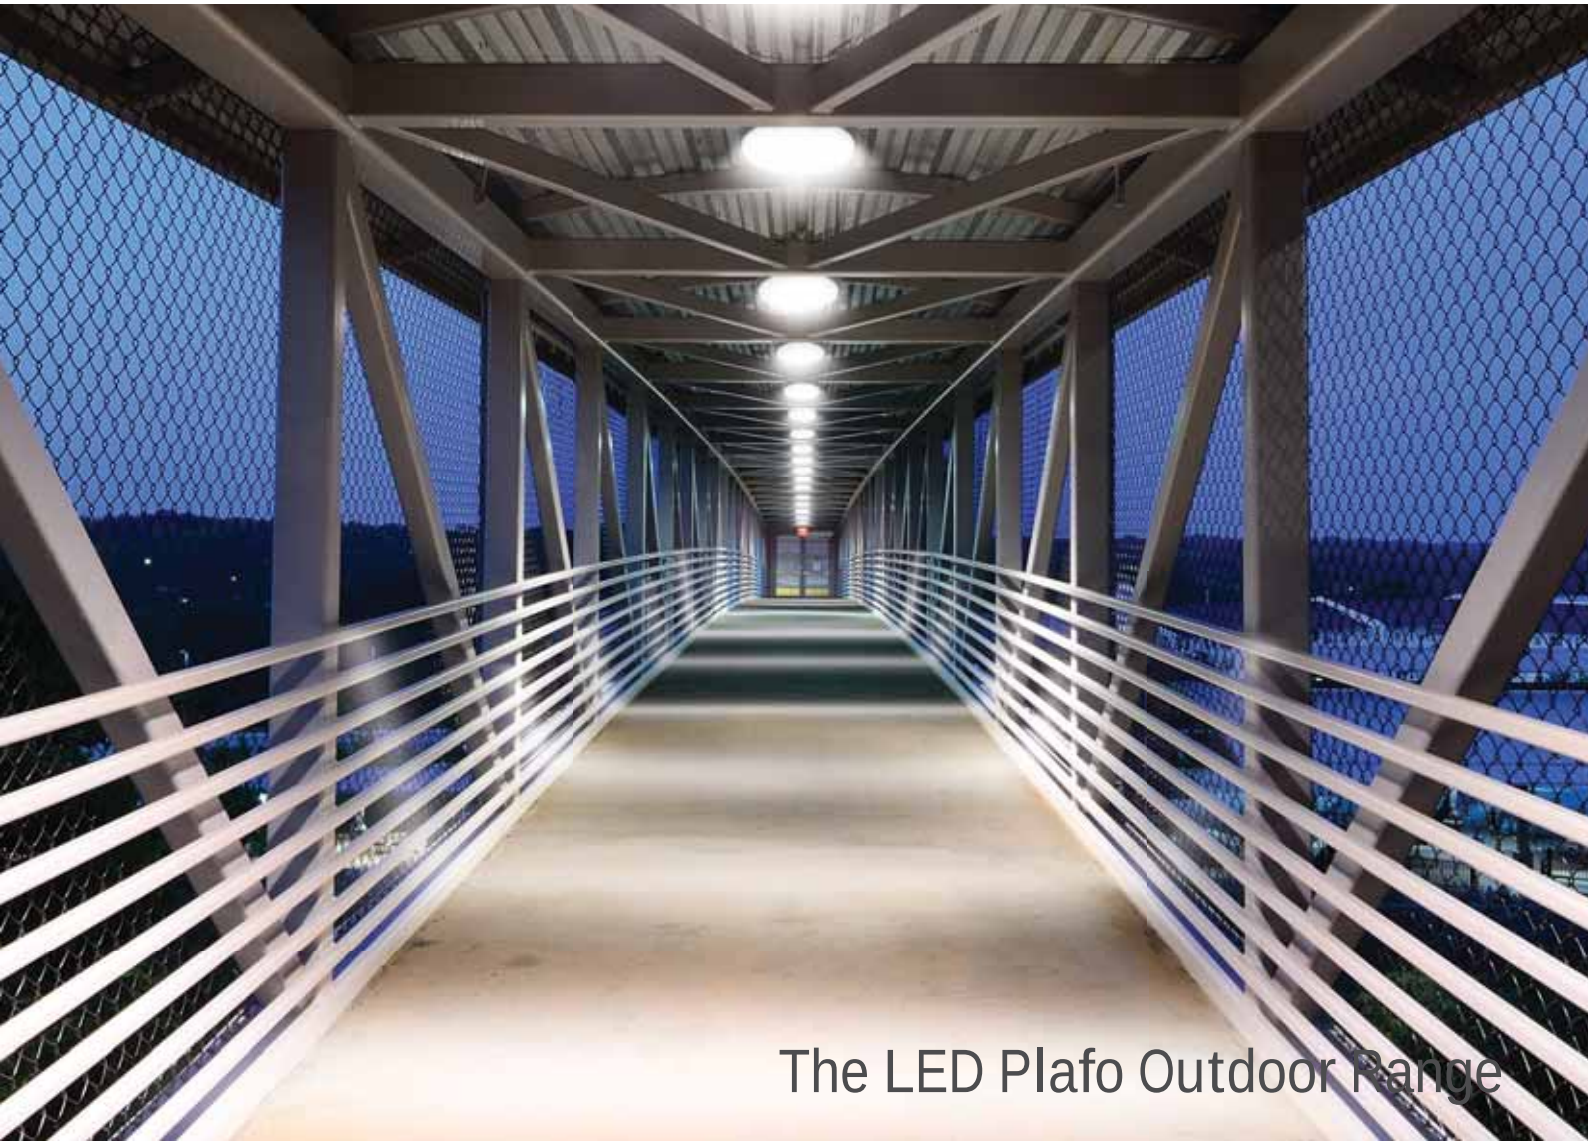




67280AL | 25W | SMD LED | PC

IP65

CE









67390/W/W


67390 | 21W | SMD 2835 | ABS + PC

IP65 80 CRI

CE



67390/AN/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67280AL/W/W	White	Warm white	3000K	25W	1660lm	230V	☐	8	Complete with driver
67390/W/W	White	Warm white	3000K	21W	1300lm	230V	☐	10	Complete with driver
67390/AN/C	Anthracite	Cool white	4000K	21W	1300lm	230V	☐	10	Complete with driver
67390/AN/W	Anthracite	Warm white	3000K	21W	1300lm	230V	☐	10	Complete with driver



The LED Plafo Outdoor Round

Plastic



67280N/W

67280N | 16W | SMD 2835 | Plastic

IP65
80 CRI CE


67280N/G


67280N/AN





67280AN/W

67280AN | 24W | SMD 2835 | Plastic

IP65
80 CRI CE


67280AN/G


67280AN/AN





67280BN/W

67280BN | 30W | SMD 2835 | Plastic

IP65
80 CRI CE


67280BN/G



67280BN/AN





67280ANE | 15W | SMD 2835 | Emergency 3Hrs Maintained | Plastic

IP65
80 CRI CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67280N/W/C	White	Cool white	4000K	16W	960lm	230V	☐	10	Complete with driver
67280N/W/W	White	Warm white	3000K	16W	960lm	230V	☐	10	Complete with driver
67280N/G/W	Grey	Warm white	3000K	16W	960lm	230V	☐	10	Complete with driver
67280N/AN/W	Anthracite	Warm white	3000K	16W	960lm	230V	☐	10	Complete with driver
67280AN/W/C	White	Cool white	4000K	24W	1440lm	230V	☐	10	Complete with driver
67280AN/W/W	White	Warm white	3000K	24W	1440lm	230V	☐	10	Complete with driver
67280AN/G/W	Grey	Warm white	3000K	24W	1440lm	230V	☐	10	Complete with driver
67280AN/AN/W	Anthracite	Warm white	3000K	24W	1440lm	230V	☐	10	Complete with driver
67280BN/W/C	White	Cool white	4000K	30W	1800lm	230V	☐	5	Complete with driver
67280BN/W/W	White	Warm white	3000K	30W	1800lm	230V	☐	5	Complete with driver
67280BN/G/W	Grey	Warm white	3000K	30W	1800lm	230V	☐	5	Complete with driver
67280BN/AN/W	Anthracite	Warm white	3000K	30W	1800lm	230V	☐	5	Complete with driver
67280ANE/G/W	Grey	Warm white	3000K	15W	1000lm	230V	☐	10	Emergency 3Hrs Maintained



The LED Plafo Outdoor Square
Plastic



67282N/W

67282N | 16W | SMD 2835 | Plastic

IP65
80 CRI CE



67282N/G



67282N/AN





67282AN/W

67282AN | 24W | SMD 2835 | Plastic


IP65
80 CRI CE



67282AN/G



67282AN/AN





67282BN/W

67282BN | 30W | SMD 2835 | Plastic


IP65
80 CRI CE



67282BN/G




67282BN/AN





67282ANE | 16W | SMD 2835 | Emergency 3Hrs Maintained | Plastic

IP65
80 CRI CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67282N/W/W	White	Warm white	3000K	16W	960lm	230V	☐	10	Complete with driver
67282N/G/W	Grey	Warm white	3000K	16W	960lm	230V	☐	10	Complete with driver
67282N/AN/W	Anthracite	Warm white	3000K	16W	960lm	230V	☐	10	Complete with driver
67282AN/W/W	White	Warm white	3000K	24W	1440lm	230V	☐	10	Complete with driver
67282AN/G/W	Grey	Warm white	3000K	24W	1440lm	230V	☐	10	Complete with driver
67282AN/AN/W	Anthracite	Warm white	3000K	24W	1440lm	230V	☐	10	Complete with driver
67282BN/W/W	White	Warm white	3000K	30W	1800lm	230V	☐	4	Complete with driver
67282BN/G/W	Grey	Warm white	3000K	30W	1800lm	230V	☐	4	Complete with driver
67282BN/AN/W	Anthracite	Warm white	3000K	30W	1800lm	230V	☐	4	Complete with driver
67282ANE/G/W	Grey	Warm white	3000K	16W	1280lm	230V	☐	10	Emergency 3Hrs Maintained

Outdoor Slim LED Plafo

Die cast



67363/W/W



67363A/AN/W




67363A/W/W



67362 | 20W | SMD LED | Die cast

IP54 80 CRI

CE






67363 | 30W | SMD LED | Die cast

IP54 80 CRI

CE






67362A | 20W | SMD LED | Die cast

IP54 80 CRI

CE






67363A | 30W | SMD LED | Die cast

IP54 80 CRI

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67362/W/W	White	Warm white	3000K	20W	1600lm	230V		8	Complete with driver
67362/AN/W	Anthracite	Warm white	3000K	20W	1600lm	230V		8	Complete with driver
67363/W/W	White	Warm white	3000K	30W	2500lm	100-240V		6	Complete with driver
67363/AN/W	Anthracite	Warm white	3000K	30W	2500lm	100-240V		6	Complete with driver
67362A/W/W	White	Warm white	3000K	20W	1600lm	230V		8	Complete with driver
67362A/AN/W	Anthracite	Warm white	3000K	20W	1600lm	230V		8	Complete with driver
67363A/W/W	White	Warm white	3000K	30W	2500lm	100-240V		6	Complete with driver
67363A/AN/W	Anthracite	Warm white	3000K	30W	2500lm	100-240V		6	Complete with driver



Outdoor Project LED Plafo

Die cast



67384/AN/W


67384 | 30W | SMD 3014 | Die cast

IP54 80 CRI

CE



67384/W/W







67384A/AN/W


67384A | 30W | SMD 3014 | Die cast

IP54 80 CRI

CE



67384A/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67384/W/W	White	Warm white	3000K	30W	2500lm	100-240V		4	Complete with driver
67384/AN/W	Anthracite	Warm white	3000K	30W	2500lm	100-240V		4	Complete with driver
67384A/W/W	White	Warm white	3000K	30W	2500lm	100-240V		4	Complete with driver
67384A/AN/W	Anthracite	Warm white	3000K	30W	2500lm	100-240V		4	Complete with driver



The LED Slim Plafo Range

Round



67366 | 12W | SMD 2835 | PC

IP54 80 CRI

CE







67366E | 12W | SMD 2835 | Emergency 3Hrs Maintained | PC

IP54 80 CRI

CE







67368 | 18W | SMD 2835 | PC

IP54 80 CRI

CE







67368M | 25W | SMD 2835 | Sensor 120sec timer | PC

IP54 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67366/W/C	White	Cool white	4000K	12W	960lm	100-240V		20	Complete with driver
67366/W/W	White	Warm white	3000K	12W	900lm	100-240V		20	Complete with driver
67366E/W/C	White	Cool white	4000K	12W	960lm	230V		20	Emergency 3Hrs Maintained
67366E/W/W	White	Warm white	3000K	12W	900lm	230V		20	Emergency 3Hrs Maintained
67368/W/C	White	Cool white	4000K	18W	1488lm	100-240V		10	Complete with driver
67368/W/W	White	Warm white	3000K	18W	1350lm	100-240V		10	Complete with driver
67368M/W/C	White	Cool white	4000K	25W	2100lm	230V		10	Complete with driver
67368M/W/W	White	Warm white	3000K	25W	2000lm	230V		10	Complete with driver



The LED Slim Plafo Range

PC



67370 | 25W | SMD 2835 | PC

IP54 80 CRI

CE








67372 | 25W | SMD 2835 | PC

IP54 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67370/W/C	White	Cool white	4000K	25W	2000lm	100-240V	☐	10	Complete with driver
67370/W/W	White	Warm white	3000K	25W	1875lm	100-240V	☐	10	Complete with driver
67372/W/C	White	Cool white	4000K	25W	2000lm	100-240V	☐	10	Complete with driver
67372/W/W	White	Warm white	3000K	25W	1875lm	100-240V	☐	10	Complete with driver



The IP44 Ceiling Plafo

Steel



62100 | 40W | G9 | Steel

IP44

CE





62200 | 60W | E27 | Steel

IP44

CE





62300 | 2x60W | E27 | Steel

IP44

CE



Order Code	Colour	Watts	Input	Class		Notes
62100/MC	Brushed chrome	40W	100-240V		20	Indoor use only
62200/MC	Brushed chrome	60W	100-240V		6	Indoor use only
62300/MC	Brushed chrome	2x60W	100-240V		5	Indoor use only




Stainless Steel Outdoor Plafo



67316A | 26W | E27 | Stainless steel + glass

IP54

CE



Order Code	Colour	Watts	Input	Class		Notes
67316A	Stainless steel	26W	100-240V		6	-



64006/G/C



64004/G/C



64002/G/C

Multi LED Slim Plafo

Round



64002 | 7W | LED | Die cast

IP20 DARK LIGHT

CE





150mm

22mm





64004 | 16W | LED | Die cast

IP20 DARK LIGHT

CE





200mm

22mm





64006 | 24W | LED | Die cast

IP20 DARK LIGHT

CE





250mm

22mm



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
64002/W/C	White	Cool white	4000K	7W	400lm	230V		10	Complete with driver
64002/G/C	Grey	Cool white	4000K	7W	400lm	230V		10	Complete with driver
64004/G/C	Grey	Cool white	4000K	16W	860lm	230V		10	Complete with driver
64006/G/C	Grey	Cool white	4000K	24W	1500lm	230V		10	Complete with driver



64008/G/C



64010/G/C

Multi LED Slim Plafo

Square



64008 | 8W | LED | Die cast

IP20 DARK LIGHT

CE







64010 | 17W | LED | Die cast

IP20 DARK LIGHT

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
64008/G/C	Grey	Cool white	4000K	8W	500lm	230V	⧈	10	Complete with driver
64010/G/C	Grey	Cool white	4000K	17W	1100lm	230V	⧈	10	Complete with driver



The LED Decorative Plafo



62132N/AN/W

62132N | 32W | SMD 2835 | Aluminium

IP20 80 CRI

CE


62132N/W/W







62142N/AN/W

62142N | 42W | SMD 2835 | Aluminium

IP20 80 CRI

CE


62142N/W/W








62135NA | 35W | SMD 5630 | Metal

IP20 80 CRI

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62132N/W/W	White	Warm white	3000K	32W	1920lm	120°	230V		1	Complete with driver
62132N/AN/W	Anthracite	Warm white	3000K	32W	1920lm	120°	230V		1	Complete with driver
62142N/W/W	White	Warm white	3000K	42W	2520lm	120°	230V		1	Complete with driver
62142N/AN/W	Anthracite	Warm white	3000K	42W	2520lm	120°	230V		1	Complete with driver
62135NA/W/W	White	Warm white	3000K	35W	2100lm	120°	230V		1	Complete with driver



The LED Project Plafo

Metal




62118D | 18W | SMD 5630 | Metal

IP20 80 CRI

CE









62125D | 25W | SMD 5630 | Metal

IP20 80 CRI

CE









62150D | 50W | SMD 5630 | Metal

IP20 80 CRI

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
62118D/W/W	White	Warm white	3000K	18W	1100lm	120°	230V		1	Complete with driver
62125D/W/C	White	Cool white	4000K	25W	1600lm	120°	230V		1	Complete with driver
62125D/W/W	White	Warm white	3000K	25W	1500lm	120°	230V		1	Complete with driver
62150D/W/C	White	Cool white	4000K	50W	3150lm	120°	230V		1	Complete with driver
62150D/W/W	White	Warm white	3000K	50W	3000lm	120°	230V		1	Complete with driver



62025


Indoor LED & Music Plafo



67404 | 18W | SMD 2835 | PC

IP40 80 CRI

CE





62025 | 24W | SMD LED | Dimmable + RGB + Speaker | ABS + PMMA

Bluetooth speaker plafo

IP20 80 CRI


DIMMABLE

CE

Google play

App Store

Application iLight



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67404/W/C	White	Cool white	4000K	18W	1700lm	100-240V	☐	10	Complete with driver
67404/W/W	White	Warm white	3000K	18W	1650lm	100-240V	☐	10	Complete with driver
62025	White	Extra warm white - Daylight	2700K - 6500K	24W	1560lm	100-240V	☐	5	Complete with driver





67402/W/W


67402 | 25W | SMD 2835 | Aluminium + PC

IP40 80 CRI

CE



67402/B/W







62142NB/AN/W


62142NB | 42W | SMD 2835 | Aluminium

IP20 80 CRI

CE



62142NB/W/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67402/W/W	White	Warm white	3000K	25W	1850lm	100-240V		10	Complete with driver
67402/B/W	Black	Warm white	3000K	25W	1850lm	100-240V		10	Complete with driver
62142NB/W/W	White	Warm white	3000K	42W	2520lm	230V		1	Complete with driver
62142NB/AN/W	Anthracite	Warm white	3000K	42W	2520lm	230V		1	Complete with driver





16

Bathroom & Mirror

Pages 389-396

G9 | T5 | T8 | E14 | 2G11 | SMD LED

Die cast + acrylic | Aluminium + PC | Metal + glass

IP44

CE





The Mirror LED Round

Aluminium + PC




38115C | 15W | SMD 2835 | Aluminium + PC

IP44 80 CRI

CE










38120C | 20W | SMD 2835 | Aluminium + PC

IP44 80 CRI

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38115C/C	Chrome	Cool white	4000K	15W	1300lm	230V		10	Complete with driver
38120C/C	Chrome	Cool white	4000K	20W	1700lm	230V		10	Complete with driver



The Mirror 60cm Range

For T8 LED Tubes




38114DE | T8 LED 60cm | Die cast + acrylic

IP44

CE








38114EE | T8 LED 60cm | Die cast + acrylic

IP44

CE








38114GE | T8 LED 60cm | Die cast + acrylic

IP44

CE








38114CE | T8 LED 60cm | Die cast + acrylic

IP44

CE






Order Code	Colour	Watts	Input	Class		Notes
38114DE/C	Chrome	-	100-240V	⏚	6	Only suitable for T8 LED tubes
38114EE/C	Chrome	-	100-240V	⏚	6	Only suitable for T8 LED tubes
38114GE/C	Chrome	-	100-240V	⏚	6	Only suitable for T8 LED tubes
38114CE/C	Chrome	-	100-240V	⏚	6	Only suitable for T8 LED tubes



The Mirror 60cm Range

For T5 14W Fluorescent



38114D | 14W | T5 | Die cast + acrylic

IP44

CE







38114E | 14W | T5 | Die cast + acrylic

IP44

CE







38114G | 14W | T5 | Die cast + acrylic

IP44

CE







38114C | 14W | T5 | Die cast + acrylic

IP44

CE





Order Code	Colour	Watts	Input	Class		Notes
38114D/C	Chrome	14W	230V		8	Complete with electronic ballast
38114E/C	Chrome	14W	230V		8	Complete with electronic ballast
38114G/C	Chrome	14W	230V		10	Complete with electronic ballast
38114C/C	Chrome	14W	230V		6	Complete with electronic ballast



The Mirror 90cm Range

For T5 21W Fluorescent




38121D | 21W | T5 | Die cast + acrylic

IP44

CE







38121E | 21W | T5 | Die cast + acrylic

IP44

CE





Order Code	Colour	Watts	Input	Class		Notes
38121D/C	Chrome	21W	230V	⏚	8	Complete with electronic ballast
38121E/C	Chrome	21W	230V	⏚	8	Complete with electronic ballast



Mirror Light

Die cast + acrylic



38108G | 8W | T5 | Die cast + acrylic

IP44

CE






38124 | 24W | 2G11 | Die cast + acrylic

IP44

CE



Order Code	Colour	Watts	Input	Class		Notes
38108G/C	Chrome	8W	230V		6	Complete with electronic ballast
38124/C	Chrome	24W	230V		6	Complete with electronic ballast



Mirror Side Lights

Metal + glass




60204 | 7W | SMD LED | Die cast + Mirror

IP44

CE



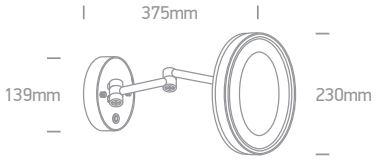




60106 | 40W | E14 | Metal + glass

IP44

CE








60106A | 2x40W | E14 | Metal + glass

IP44

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
60204/C	Chrome	Cool white	4000K	7W	490lm	100-240V	⏚	6	Complete with driver
60106/C	Chrome	-	-	40W	-	100-240V	⏚	10	-
60106A/C	Chrome	-	-	2x40W	-	100-240V	⏚	10	-

The Mirror G9 Decorative Globes

Metal + glass



60107C/C

60107B/C




60107A | 28W | G9 | Metal + glass

IP44

CE



Suitable for LED lamps.








60107B | 2x28W | G9 | Metal + glass

IP44

CE



Suitable for LED lamps.





Order Code	Colour	Watts	Input	Class		Notes
60107A/C	Chrome	28W	100-240V		12	-
60107B/C	Chrome	2x28W	100-240V		8	-



The Mirror G9 Decorative Globes

Metal + glass




60107C | 3x28W | G9 | Metal + glass

IP44


CE



Suitable for LED lamps.








60107D | 4x28W | G9 | Metal + glass

IP44

CE



Suitable for LED lamps.





Order Code	Colour	Watts	Input	Class		Notes
60107C/C	Chrome	3x28W	100-240V		6	-
60107D/C	Chrome	4x28W	100-240V		6	-





17

Pendants

Pages 399-408

MR16 | GU10 | HQI | G12 | E27 | COB LED | LED

Die cast | Natural aluminium | Gypsum | Metal

IP20 IP40

ADJUSTABLE 80 CRI





Gypsum Pendants




63036 | 10W | MR16 | GU10 | Gypsum

IP20

CE



Suitable for LED lamps.








63038 | 7W | GX53 | Gypsum

IP20

CE







Order Code	Colour	Watts	Input	Class		Notes
63036	White	10W	100-240V	☐	12	-
63038	White	7W	100-240V	☐	12	-



Mini Pendants LED

Natural aluminium



63001 | 3W | LED | Natural aluminium

IP20

CE







63003 | 3W | LED | Natural aluminium

IP40

CE








63002 | 3W | LED | Recessed base | Natural aluminium

IP20

CE










63005 | 6W | LED | Natural aluminium

IP20

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
63001/AL/W	Aluminium	Warm white	3000K	3W	100lm	45°	100-240V		-	-	20	Complete with driver
63003/AL/W	Aluminium	Warm white	3000K	3W	130lm	45°	100-240V		-	-	30	Complete with driver
63002/AL/W	Aluminium	Warm white	3000K	3W	130lm	45°	100-240V		70mm	40mm	8	Complete with driver
63002/AL/BL	Aluminium	Blue	-	3W	-	45°	100-240V		70mm	40mm	8	Complete with driver
63005/AL/W	Aluminium	Warm white	3000K	6W	400lm	20°	100-240V		-	-	10	Complete with driver

Deco Pendant

Metal






63018A | 26W | E27 | Metal

IP20

CE



Order Code	Colour	Cable Colour	Watts	Input	Class		Notes
63018A/C	Chrome	Black	26W	100-240V		1	-



0990/BBS



0990/B

Decorative E27



0990/B

0990 | 50W | E27

IP20

CE



0990/BBS





0992 | 50W | E27

IP20

CE



Order Code	Colour	Lampholder	Watts	Input	Class			Notes
0990/B	Black	E27	50W	100-240V	⏚	200cm	36	-
0990/BBS	Brushed brass	E27	50W	100-240V	⏚	200cm	36	-
0992/B	Black	E27	50W	100-240V	⏚	200cm	36	-






38140 | 40W | T5C | 2GX13 | Natural aluminium + PC

IP20

CE



Order Code	Colour	Cable Colour	Watts	Input	Class		Notes
38140/AL	Aluminium	Transparent	40W	230V		1	Complete with electronic ballast




Linear LED Bars



38018 | 6x1W | LED | Metal

IP20

CE







38016/G/W

38016 | 16W | LED | Die cast

IP20

CE



38016/W/D





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
38018/G/D	Grey	Daylight	6000K	6x1W	100-240V		1	Complete with driver
38018/G/W	Grey	Warm white	3000K	6x1W	100-240V		1	Complete with driver
38016/W/D	White	Daylight	6000K	16W	100-240V		1	Complete with driver
38016/W/W	White	Warm white	3000K	16W	100-240V		1	Complete with driver
38016/G/W	Grey	Warm white	3000K	16W	100-240V		1	Complete with driver



62150J/G/5



63270/G



63070D/G

Pendant HQI G12

Die cast



62150J | 70W | HQI | G12 | Die cast

IP20 ADJUSTABLE

CE

385mm

212mm

200mm





63270 | 2x70W | HQI | G12 | Die cast

IP20 ADJUSTABLE

CE

385mm

200mm



Order Code	Colour	Watts	Input	Class		Notes
62150J/G/5	Grey	70W	230V	⏚	1	Complete with ballast
63270/G	Grey	2x70W	230V	⏚	4	Complete with electronic ballast




Pendant HQI G12

Aluminium + PC



63070D | 70W | HQI | G12 | Aluminium + PC

IP20





Order Code	Colour	Watts	Input	Class		Notes
63070D/G	Grey	70W	230V		6	Complete with electronic ballast

Lowbay Light

Aluminium + PC





63150C | 150W | HQI | G12 | Aluminium + PC

IP20

CE





Order Code	Colour	Watts	Input	Class		Notes
63150C/G/ELE	Grey	150W	230V	⏚	1	Complete with electronic ballast



LED Pendants
Aluminium



63034 | 18W | COB LED | Aluminium

IP40

CE







63025L | 25W | COB LED | Aluminium

IP20 85 CRI

CE



Optional glass included.







63030L | 30W | COB LED | Aluminium

IP20 85 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63034/W/W	White	Warm white	3000K	18W	1019lm	30°	100-240V		200cm	1	Complete with driver
63025L/W/W	White	Warm white	3000K	25W	1800lm	42°	230V		-	1	Complete with driver
63030L/G/W	Grey	Warm white	3000K	30W	2000lm	76°	230V		-	1	Complete with driver





18

Decorative

Pages 411-426

MR16 | GU5,3 | G4 | G9 | GY6,35 | E27 | SMD LED | LED

Die cast + crystal | Wood | Metal | Plastic | ABS | PC

IP20 IP44 IP54 IP65

ADJUSTABLE ADJUSTABLE DIMMABLE 80 CRI





Crystal Recessed

Die cast + crystal




10101C4 | 10W | G4 | Die cast + crystal

IP20

CE










10101C5 | 10W | G4 | Die cast + crystal

IP20

CE







Order Code	Colour	Watts	Input	Class					Notes
10101C4/C	Chrome	10W	12V	III	40cm	60mm	30mm	50	-
10101C5/C	Chrome	10W	12V	III	40cm	60mm	30mm	50	-

Crystal Recessed

Die cast + crystal



10105C4 | 50W | MR16 | GU5,3 | Die cast + crystal


IP20

CE





Order Code	Colour	Watts	Input	Class					Notes
10105C4/C	Chrome	50W	12V	III	40cm	72mm	50mm	4	-

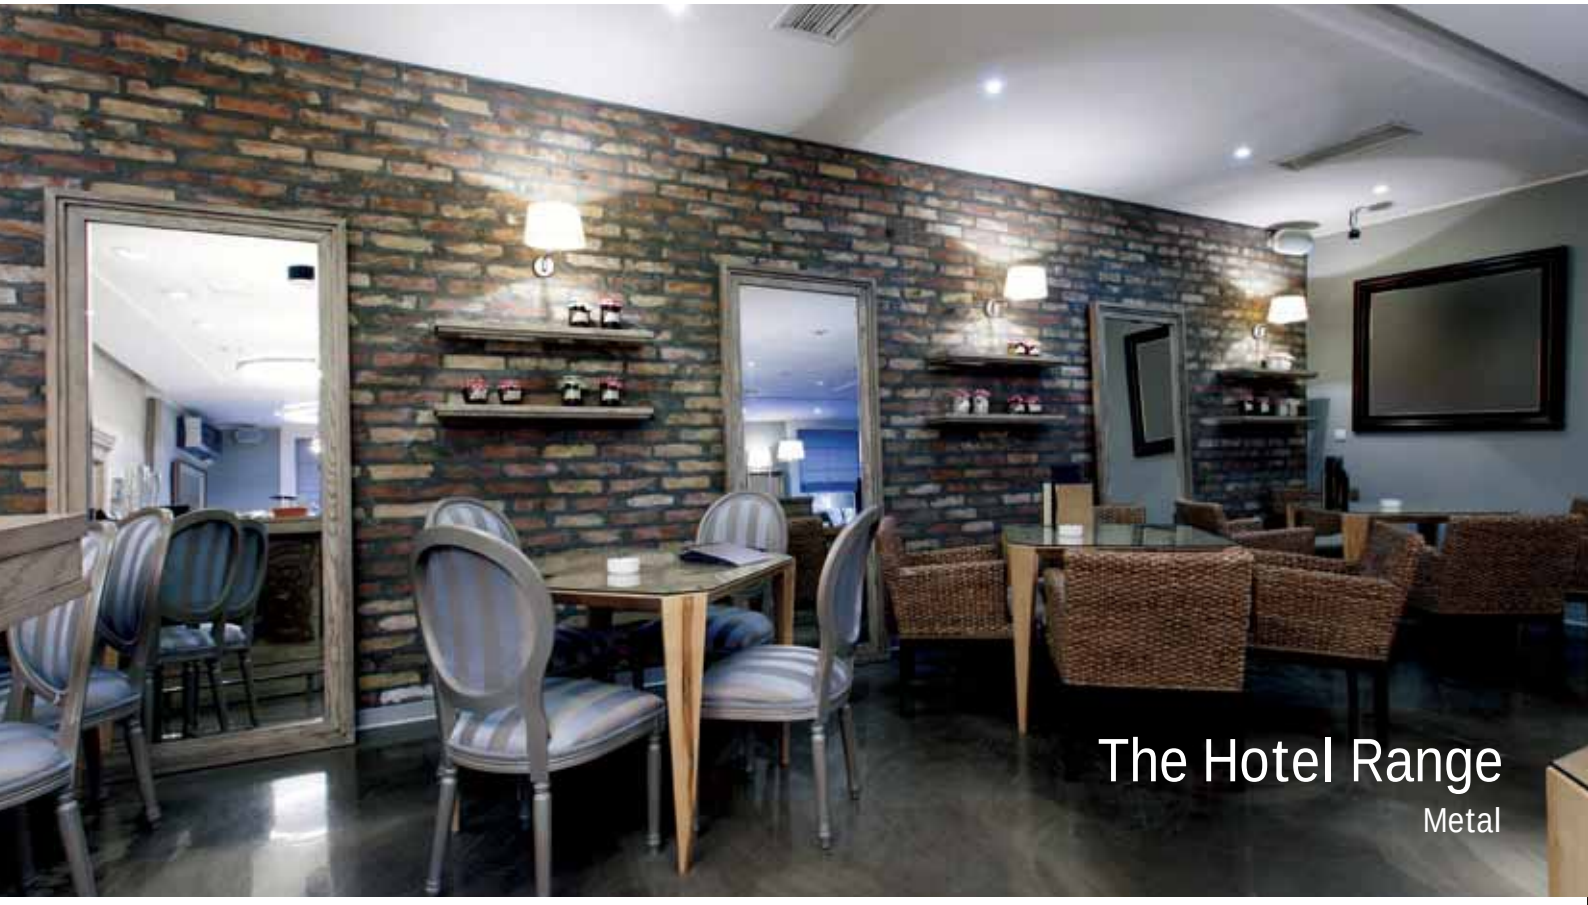




61046 | 40W | E27 | Metal + white fabric shade

IP20 ADJUSTABLE

CE

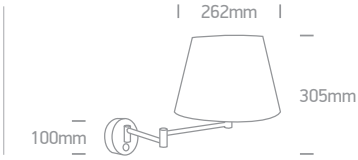




65140 | 3W LED + 40W E27 | Metal + white fabric shade

IP20 ADJUSTABLE

CE






65138 | 3W LED + 40W E27 | Metal + white fabric shade

IP20 ADJUSTABLE

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61046/MC	Brushed chrome	-	-	40W	-	100-240V	⏚	8	-
65140/MC/W	Brushed chrome	Warm white	3000K	3W LED + 40W E27	100lm	230V	⏚	12	Complete with driver
65138/MC/W	Brushed chrome	Warm white	3000K	3W LED + 40W E27	100lm	100-240V	⏚	6	Complete with driver



Hotel Range LED


Metal



61044 | 3W LED + 40W E27 | Metal + white fabric shade

IP20 ADJUSTABLE

CE








61044A | 3W LED + 40W E27 | Metal + white fabric shade

IP20 ADJUSTABLE

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61044/C/W	Chrome	Warm white	3000K	3W LED + 40W E27	100lm	100-240V		6	Complete with driver
61044A/C/W	Chrome	Warm white	3000K	3W LED + 40W E27	100lm	100-240V		1	Complete with driver



Hotel Range Table & Floor Lamps


Metal



61042A | 40W | E27 | Metal + white fabric shade

IP20

CE








61042B | 40W | E27 | Metal + white fabric shade

IP20

CE





Order Code	Colour	Watts	Input	Class		Notes
61042A/MC	Brushed chrome	40W	100-240V		1	-
61042B/MC	Brushed chrome	40W	100-240V		1	-



60’s Nostalgia

Metal



61024 | 20W | E27 | Metal + fabric

IP20

CE









61026 | 26W | E27 | Metal + fabric

IP20

CE







Order Code	Colour	Watts	Input	Class		Notes
61024/W	White	20W	100-240V		8	-
61026/W	White	26W	100-240V		2	-



61016 + 61016A/B



61016 + 61016A/W


Wood Art




61016 | 20W | E27 | Wood — Shade must be ordered separately.

IP20

CE







61016A | Shades for 61016

CE

61016A/W White
61016A/B Black



4

Order Code	Colour	Watts	Input	Class		Notes
61016	Natural	20W	100-240V	⧈	1	-



The LED Flickering Candle




9C002 | LED | Flickering flame | Wax

Batteries not included.

IP20

CE




Order Code	Colour	Battery		Notes
9C002/F	Extra warm white	2xC	24	Wax with aroma

one

Retro Floor Lamp

Metal

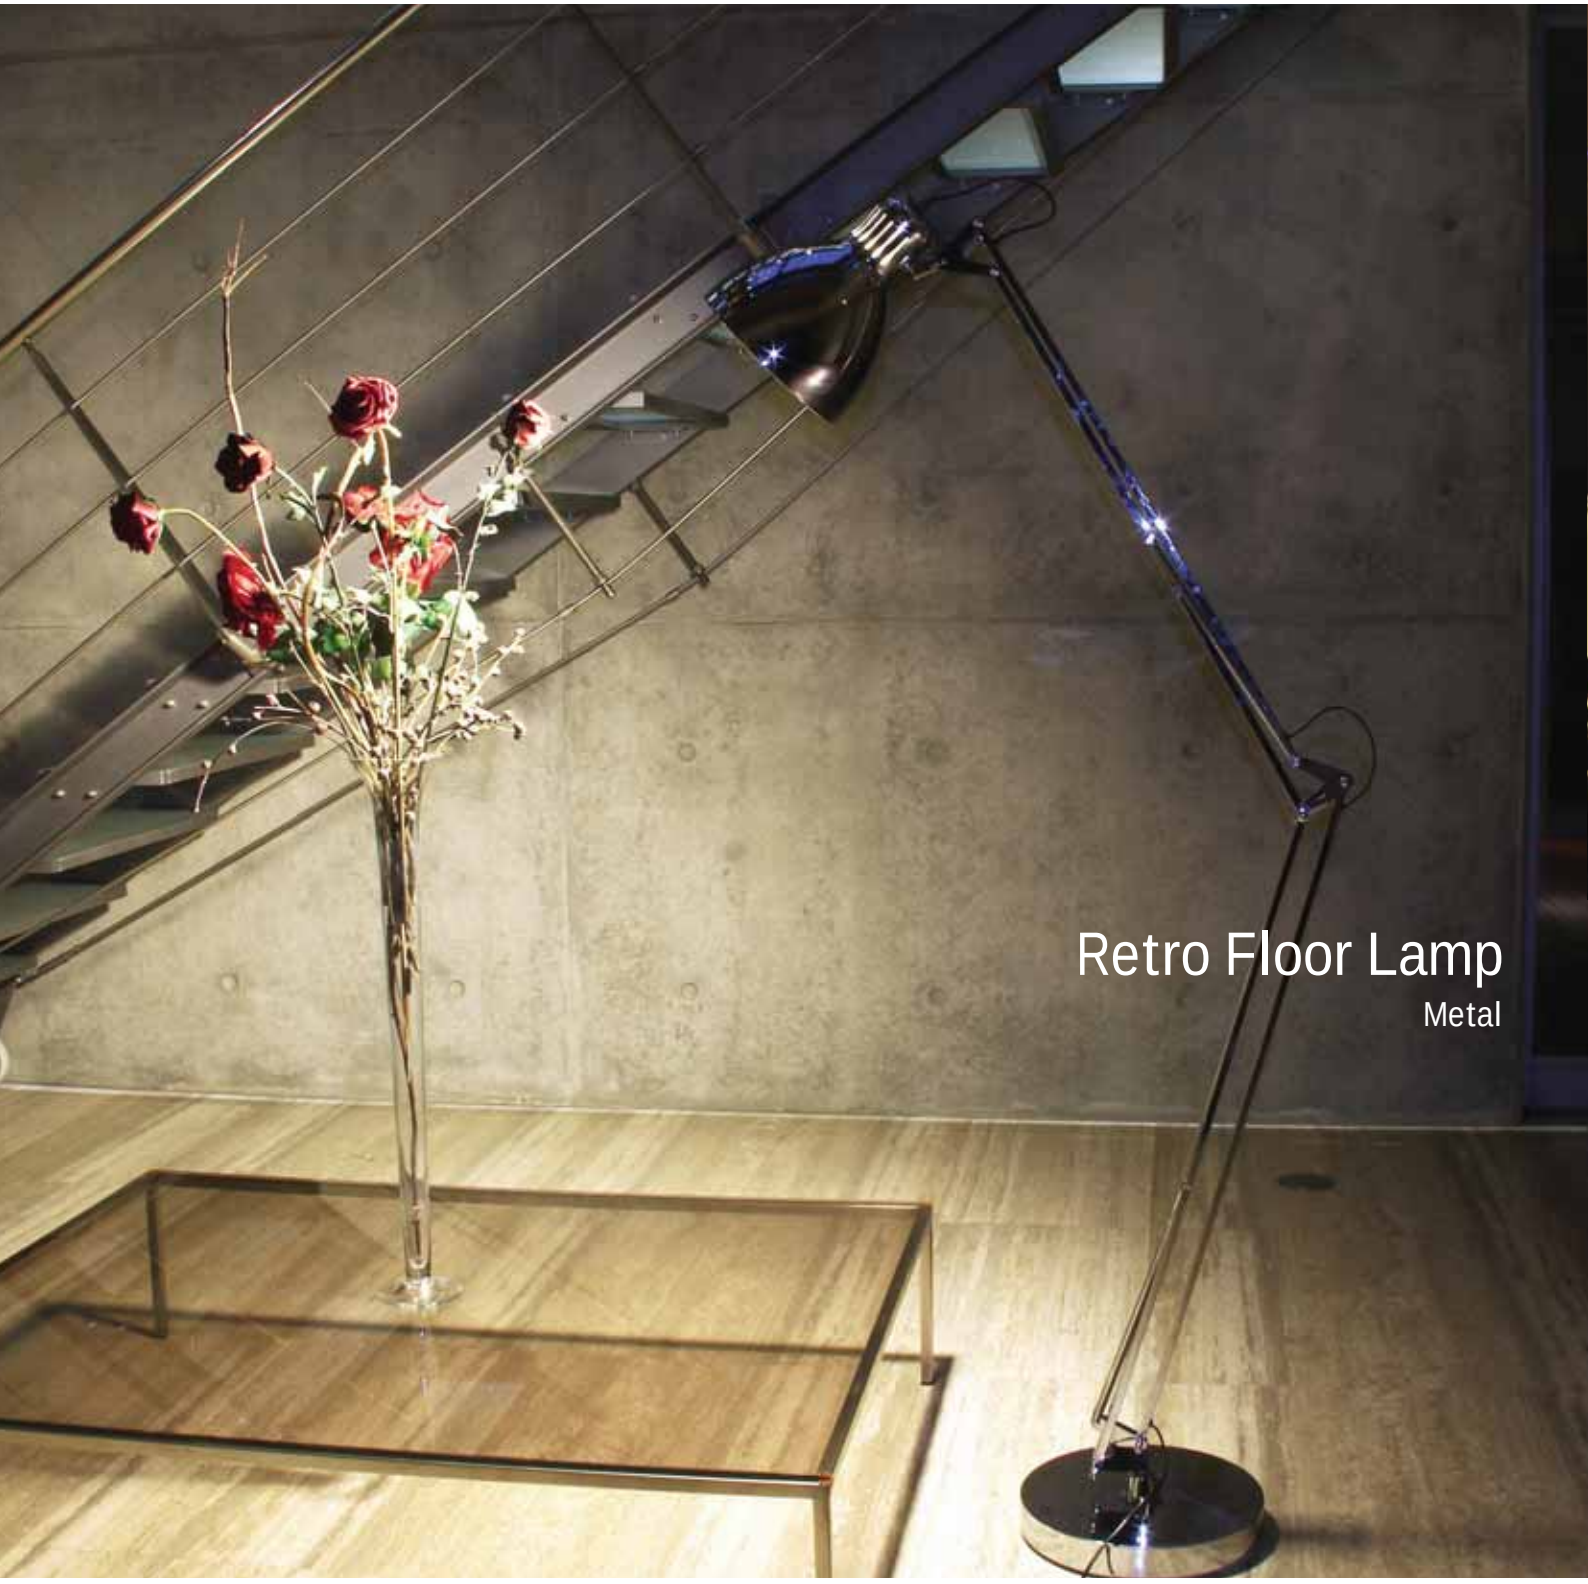




61058A | 26W | E27 | Metal

IP20

CE



Order Code	Colour	Watts	Input	Class		Notes
61058A/C	Chrome	26W	100-240V		1	-



Chrome Classic


Metal



61036 | 2x11W | E14 | Metal

IP20

CE








61038 | 20W | E27 | Metal

IP20

CE








61038B | 15W | E14 | Metal

IP20

CE





Order Code	Colour	Watts	Input	Class		Notes
61036/C	Chrome	2x11W	100-240V	☐	1	-
61038/C	Chrome	20W	100-240V	☐	1	-
61038B/C	Chrome	15W	100-240V	☐	1	-


61068B/C


61068/C


61070/W


Reading LED Lamps


61070/W

61070 | 5W | SMD 2835 | Dimmable | Plastic

IP20 ADJUSTABLE DIMMABLE CE


61070/B







61068 | 15W | LED | Variable colour temperature | Dimmable | ABS

IP20 ADJUSTABLE DIMMABLE CE










61068B | 12W | SMD 2835 | Dimmable | ABS

IP20 ADJUSTABLE 80 CRI DIMMABLE CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61070/W	White	Cool white	4000K	5W	480lm	100-240V	☐	8	EU charging socket
61070/B	Black	Cool white	4000K	5W	480lm	100-240V	☐	8	EU charging socket
61068/C	White	-	3000K-6000K	15W	500lm	100-240V	☐	10	USB charging socket
61068B/C	Black	Cool white	4000K	12W	600lm	100-240V	☐	10	USB charging socket



The Magnifying Lens LED Lamp




61066 | 8W | SMD 2835 | Plastic

Magnifying lens.

IP20 ADJUSTABLE 80 CRI

CE




140°



61066T | White floor stand for 61066

CE



1

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61066/W	White	Daylight	6000K	8W	760lm	230V	⧈	4	Complete with driver

one



65105A/MC

Decorative Spots

Die cast + glass



65105A | 50W | MR16 | GU10 | Die cast + glass

IP20 ADJUSTABLE

CE



Suitable for LED lamps.





65305B | 3x40W | G9 | Die cast + glass

IP20 ADJUSTABLE

CE



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class		Notes
65105A/MC	Brushed chrome	50W	100-240V		20	-
65305B/MC	Brushed chrome	3x40W	100-240V		10	-



Outdoor Floor Lamp


Die cast + PC



61040 | 20W | E27 | Die cast + PC

IP65

CE



Order Code	Colour	Watts	Input	Class			Notes
61040/AN	Anthracite	20W	100-240V		300cm	1	-

Outdoor E27 String Lights



0994 | 15x60W | E27 | 15xT-lampholders

IP44

CE



Order Code	Colour	Watts	Input	Class			Notes
0994/B	Black	15x60W	100-240V		850cm	8	50cm spacing



Moonlights

PC



63028 | 15W | E27 | PC

IP54





380mm



63028A | 20W | E27 | PC

IP54





450mm



63028B | 30W | E27 | PC

IP54





560mm

Order Code	Colour	Watts	Input	Class		Notes
63028	White	15W	100-240V		1	Pendant / Ground / Spike
63028A	White	20W	100-240V		1	Pendant / Ground / Spike
63028B	White	30W	100-240V		1	Pendant / Ground / Spike

one





19

Wall Recessed & Inground


Pages 429-450

MR16 | GU10 | G9 | GX53 | COB LED | SMD LED | LED

Die cast | Natural aluminium | Stainless steel | Gypsum | Plastic

IP20 IP44 IP54 IP65 IP67

ADJUSTABLE DIMMABLE DARK LIGHT QUICK FIX IK08 IK10 80 CRI 85 CRI 90 CRI

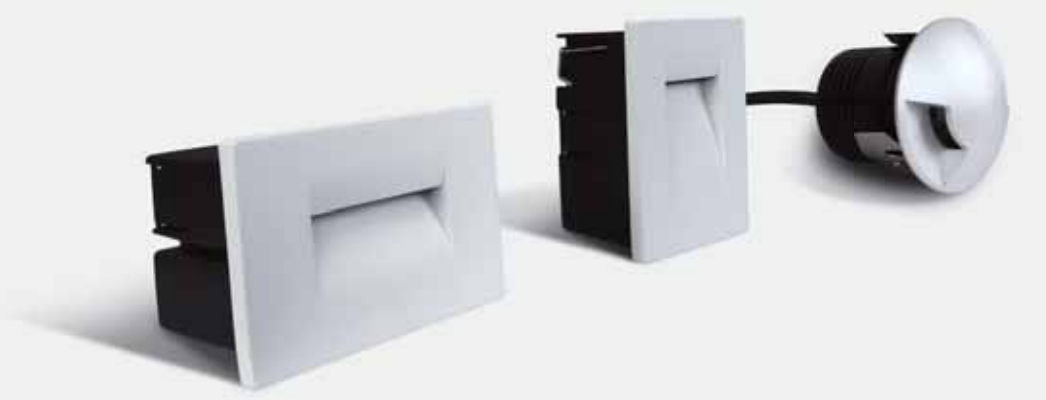



Square Wall Recessed

Die cast



50104G | 40W | G9 | Die cast

IP20



Suitable for LED lamps.





50113 | 13W | G24d1 / G24q1 | Die cast

IP20 QUICK FIX



Order Code	Colour	Watts	Input	Class					Notes
50104G/MC/2	Brushed chrome	40W	100-240V		-	90x90mm	90mm	18	-
50113/MC/2	Brushed chrome	13W	230V		30cm	90x90mm	90mm	18	G24d1 requires magnetic ballast
50113/G/2/ELE	Grey	13W	230V		30cm	90x90mm	90mm	18	G24q1 requires ballast 89113/ELE
50113/MC/2/ELE	Brushed chrome	13W	230V		30cm	90x90mm	90mm	18	G24q1 requires ballast 89113/ELE



Dark Light Wall Recessed

Gypsum





68054 | 50W | MR16 | GU10 | Gypsum

IP20 DARK LIGHT



Suitable for LED lamps.



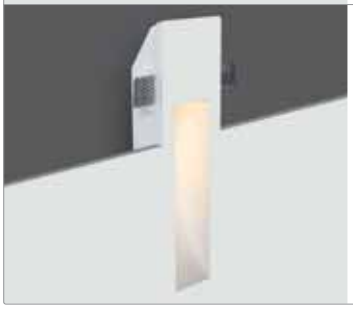


68056 | 50W | MR16 | GU10 | Gypsum

IP20 DARK LIGHT



Suitable for LED lamps.

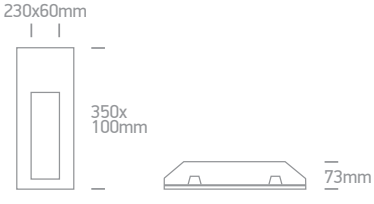

Order Code	Colour	Watts	Input	Class					Notes
68054	White	50W	100-240V		15cm	121x121mm	95mm	24	-
68056	White	50W	100-240V		15cm	351x101mm	103mm	6	-



Indoor Square Wall Recessed




68006 | 1W | LED | Die cast

IP44 DARK LIGHT

CE










68007 | 1,5W | LED | Plastic

IP20 DARK LIGHT

CE



Supplied with box for concrete installation.








68038 | 1W | LED | Die cast

IP20 DIMMABLE

QUICK FIX CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class					Notes
68006/W/W	White	Warm white	3000K	1W	230V		12cm	75x75mm	60mm	100	Complete with driver
68006/G/W	Grey	Warm white	3000K	1W	230V		12cm	75x75mm	60mm	100	Complete with driver
68007/W/W	White	Warm white	3000K	1,5W	100-240V		-	86x86mm	40mm	50	Complete with driver
68038/G/W	Grey	Warm white	3000K	1W	350mA		40cm	50x70mm	60mm	32	Requires 350mA driver



Indoor Dark Light Wall Recessed


68005/G/W


68005 | 1W | LED | Die cast

For concrete installation, order 68005/BOX.

IP20 DIMMABLE

QUICK FIX DARK LIGHT CE



68005/G/BL





68005/BOX | Concrete installation box for 68005

CE



20


68008/G/W


68008 | 1W | LED | Die cast

For concrete installation, order 68008/BOX.

IP20 DIMMABLE

QUICK FIX DARK LIGHT CE



68008/G/BL





68008/BOX | Concrete installation box for 68008

CE



20

Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class					Notes
68005/G/D	Grey	Daylight	6000K	1W	350mA	III	50cm	73x73mm	40mm	50	Requires 350mA driver
68005/G/W	Grey	Warm white	3000K	1W	350mA	III	50cm	73x73mm	40mm	50	Requires 350mA driver
68005/G/BL	Grey	Blue	-	1W	350mA	III	50cm	73x73mm	40mm	50	Requires 350mA driver
68005/G/GR	Grey	Green	-	1W	350mA	III	50cm	73x73mm	40mm	50	Requires 350mA driver
68008/G/D	Grey	Daylight	6000K	1W	350mA	III	50cm	65x212mm	90mm	20	Requires 350mA driver
68008/G/W	Grey	Warm white	3000K	1W	350mA	III	50cm	65x212mm	90mm	20	Requires 350mA driver
68008/G/BL	Grey	Blue	-	1W	350mA	III	50cm	65x212mm	90mm	20	Requires 350mA driver



Outdoor Decorative Wall Recessed

Die cast



68052/W/W

68052 | 4W | SMD 2835 | Die cast


Supplied with box for concrete installation.

IP65 80 CRI

DARK LIGHT CE



68052/AN/W








68052/G/W | 4W | LED | Die cast

IP65 80 CRI

DARK LIGHT CE



Supplied with box for concrete installation.







68052A/W/W

68052A | 5W | SMD 2835 | Die cast


Supplied with box for concrete installation.

IP65 80 CRI

DARK LIGHT CE



68052A/AN/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation			Notes
68052/W/W	White	Warm white	3000K	4W	400lm	100-240V		100x70mm	95x70mm	80mm	20	Complete with driver
68052/AN/W	Anthracite	Warm white	3000K	4W	400lm	100-240V		100x70mm	95x70mm	80mm	20	Complete with driver
68052/G/W	Grey	Warm white	3000K	4W	400lm	100-240V		100x70mm	95x60mm	70mm	20	Complete with driver
68052A/W/W	White	Warm white	3000K	5W	500lm	100-240V		205x54mm	205x50mm	80mm	18	Complete with driver
68052A/AN/W	Anthracite	Warm white	3000K	5W	500lm	100-240V		205x54mm	205x50mm	80mm	18	Complete with driver



Outdoor Wall Recessed

Die cast




68046 | 2x1W | LED | Die cast


IP65

CE



Supplied with box for concrete installation.










68048 | 4x1W | LED | Die cast


IP65

CE



Supplied with box for concrete installation.










68050 | 6x1W | LED | Die cast

IP65

CE



Supplied with box for concrete installation.







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
68046/W/W	White	Warm white	3000K	2x1W	140lm	100-240V		100x100mm	100mm	20	Complete with driver
68046/G/W	Grey	Warm white	3000K	2x1W	140lm	100-240V		100x100mm	100mm	20	Complete with driver
68046/AN/W	Anthracite	Warm white	3000K	2x1W	140lm	100-240V		100x100mm	100mm	20	Complete with driver
68048/W/W	White	Warm white	3000K	4x1W	280lm	100-240V		170x90mm	100mm	12	Complete with driver
68048/G/W	Grey	Warm white	3000K	4x1W	280lm	100-240V		170x90mm	100mm	12	Complete with driver
68048/AN/W	Anthracite	Warm white	3000K	4x1W	280lm	100-240V		170x90mm	100mm	12	Complete with driver
68050/W/W	White	Warm white	3000K	6x1W	420lm	100-240V		220x90mm	100mm	8	Complete with driver
68050/G/W	Grey	Warm white	3000K	6x1W	420lm	100-240V		220x90mm	100mm	8	Complete with driver
68050/AN/W	Anthracite	Warm white	3000K	6x1W	420lm	100-240V		220x90mm	100mm	8	Complete with driver



LED Decorative Wall Recessed
Aluminium



68004/W/W

68004 | 3W | COB LED | Aluminium

Supplied with box for concrete installation.

IP54 90 CRI

DIMMABLE DARK LIGHT CE



68004/AL/W





68004A/W/W

68004A | 1W | LED | Aluminium

Supplied with box for concrete installation.

IP54 85 CRI

DIMMABLE DARK LIGHT QUICK FIX CE



68004A/AL/W



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Concrete installation		Gypsum installation			Notes
68004/AL/W	Aluminium	Warm white	3000K	3W	120lm	24°	350mA		100cm	49mm	110mm	49mm	70mm	36	Requires 350mA driver
68004/W/W	White	Warm white	3000K	3W	120lm	24°	350mA		100cm	49mm	110mm	49mm	70mm	36	Requires 350mA driver
68004A/AL/W	Aluminium	Warm white	3000K	1W	40lm	60°	350mA		200cm	36mm	50mm	33mm	30mm	60	Requires 350mA driver
68004A/W/W	White	Warm white	3000K	1W	40lm	60°	350mA		200cm	36mm	50mm	33mm	30mm	60	Requires 350mA driver


68032/G/W


68032/AL/W


68030/AL/W

Indoor/Outdoor Dark Light Wall Recessed




68030 | 3W | LED | Aluminium

IP54 DARK LIGHT

CE


Supplied with box for concrete installation.





68032/AL/W | 3W | LED | Natural aluminium

IP54 DARK LIGHT

CE


Supplied with box for concrete installation.





68032/G/W | 3W | LED | Die cast

IP54 DARK LIGHT

CE


Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Concrete installation	Gypsum installation		Notes
68030/AL/W	Aluminium	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with driver
68030/W/W	White	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with driver
68032/AL/W	Aluminium	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with driver
68032/G/W	Grey	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with driver

one



Outdoor Wall Recessed

Stainless steel / Brass




68001 | 1,6W | LED | Stainless steel / Brass

IP54

CE



Supplied with box for concrete installation & kit for gypsum installation.








68002 | 1,2W | LED | Stainless steel / Brass

IP54

CE



Supplied with box for concrete installation & kit for gypsum installation.








68003 | 1,6W | LED | Stainless steel / Brass

IP54

CE




Supplied with box for concrete installation & kit for gypsum installation.





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class	Concrete installation	Gypsum installation			Notes
68001/D	Stainless steel	Daylight	6000K	1,6W	230V		97x97mm	90x90mm	65mm	18	Complete with driver
68001/W	Stainless steel	Warm white	3000K	1,6W	230V		97x97mm	90x90mm	65mm	18	Complete with driver
68001/BL	Stainless steel	Blue	-	1,6W	230V		97x97mm	90x90mm	65mm	18	Complete with driver
68001/R	Stainless steel	Red	-	1,6W	230V		97x97mm	90x90mm	65mm	18	Complete with driver
68002/W	Stainless steel	Warm white	3000K	1,2W	230V		105x35mm	100x35mm	65mm	40	Complete with driver
68002/R	Stainless steel	Red	-	1,2W	230V		105x35mm	100x35mm	65mm	40	Complete with driver
68002/BS/W	Brass	Warm white	3000K	1,2W	230V		105x35mm	100x35mm	65mm	40	Complete with driver
68003/D	Stainless steel	Daylight	6000K	1,6W	230V		158x55mm	160x55mm	70mm	18	Complete with driver
68003/W	Stainless steel	Warm white	3000K	1,6W	230V		158x55mm	160x55mm	70mm	18	Complete with driver
68003/BL	Stainless steel	Blue	-	1,6W	230V		158x55mm	160x55mm	70mm	18	Complete with driver

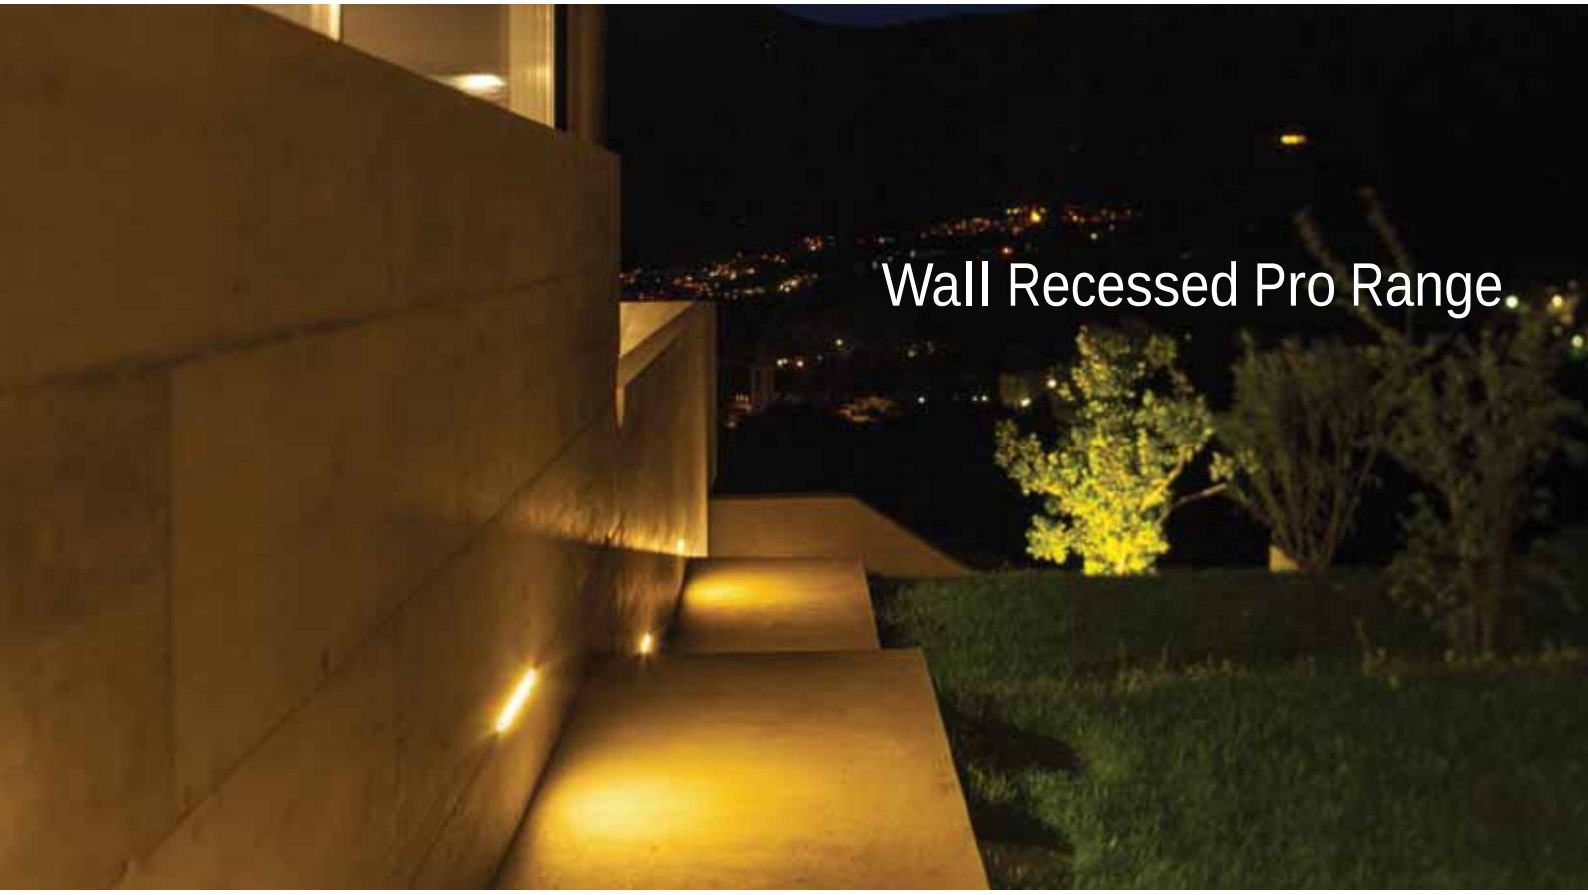




68058 | 3,7W | SMD LED | Stainless steel 316

IP65 80 CRI
IK09 CE



Supplied with box for concrete installation.





68058A | 7W | SMD LED | Stainless steel 316

IP65 80 CRI
IK09 CE



Supplied with box for concrete installation.






68060 | 6,7W | SMD LED | Die cast

IP65 80 CRI
IK10 DARK LIGHT CE



Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
68058/W	Stainless steel	Warm white	3000K	3,7W	46lm	120°	230V		50cm	180x58mm	97mm	12	Complete with driver
68058A/W	Stainless steel	Warm white	3000K	7W	82lm	120°	230V		50cm	313x58mm	97mm	6	Complete with driver
68060/W	Grey	Warm white	3000K	6,7W	56lm	120°	230V		50cm	240x70mm	88mm	8	Complete with driver



Outdoor Dark Light Wall Recessed

Die cast



68068/W/W

68068 | 3W | SMD 2835 | Die cast

Supplied with box for concrete installation.

IP65

80 CRI DARK LIGHT CE



68068/G/W



68068/AN/W







68068A/W/W

68068A | 3W | SMD 2835 | Die cast

Supplied with box for concrete installation.

IP65


80 CRI DARK LIGHT CE



68068A/G/W



68068A/AN/W







68068C/W/W

68068C | 6W | SMD 2835 | Die cast

Supplied with box for concrete installation.

IP65


80 CRI DARK LIGHT CE



68068C/G/W



68068C/AN/W





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation			Notes
68068/W/W	White	Warm white	3000K	3W	300lm	100-240V		110mm	100mm	60mm	24	Complete with driver
68068/G/W	Grey	Warm white	3000K	3W	300lm	100-240V		110mm	100mm	60mm	24	Complete with driver
68068/AN/W	Anthracite	Warm white	3000K	3W	300lm	100-240V		110mm	100mm	60mm	24	Complete with driver
68068A/W/W	White	Warm white	3000K	3W	300lm	100-240V		110x110mm	100mm	60mm	24	Complete with driver
68068A/G/W	Grey	Warm white	3000K	3W	300lm	100-240V		110x110mm	100mm	60mm	24	Complete with driver
68068A/AN/W	Anthracite	Warm white	3000K	3W	300lm	100-240V		110x110mm	100mm	60mm	24	Complete with driver
68068C/W/W	White	Warm white	3000K	6W	550lm	100-240V		220x70mm	210x60mm	80mm	12	Complete with driver
68068C/G/W	Grey	Warm white	3000K	6W	550lm	100-240V		220x70mm	210x60mm	80mm	12	Complete with driver
68068C/AN/W	Anthracite	Warm white	3000K	6W	550lm	100-240V		220x70mm	210x60mm	80mm	12	Complete with driver



Outdoor Dark Light Wall Recessed

Die cast




68062 | 3W | LED | Die cast

IP65 80 CRI

DARK LIGHT CE



Supplied with box for concrete installation.








68064 | 3W | LED | Die cast

IP65 80 CRI

DARK LIGHT CE



Supplied with box for concrete installation.








68066 | 8,5W | SMD LED | Die cast

IP65 80 CRI

DARK LIGHT CE




Supplied with box for concrete installation.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Concrete installation	Gypsum installation			Notes
68062/W/W	White	Warm white	3000K	3W	55lm	53°	100-240V		62x97mm	60x95mm	65mm	24	Complete with driver
68062/G/W	Grey	Warm white	3000K	3W	55lm	53°	100-240V		62x97mm	60x95mm	65mm	24	Complete with driver
68064/W/W	White	Warm white	3000K	3W	48lm	44°	100-240V		97x62mm	95x60mm	65mm	24	Complete with driver
68064/G/W	Grey	Warm white	3000K	3W	48lm	44°	100-240V		97x62mm	95x60mm	65mm	24	Complete with driver
68066/W/W	White	Warm white	3000K	8,5W	160lm	44°	100-240V		238x74mm	238x74mm	80mm	12	Complete with driver
68066/G/W	Grey	Warm white	3000K	8,5W	160lm	44°	100-240V		238x74mm	238x74mm	80mm	12	Complete with driver
68066/AN/W	Anthracite	Warm white	3000K	8,5W	160lm	44°	100-240V		238x74mm	238x74mm	80mm	12	Complete with driver

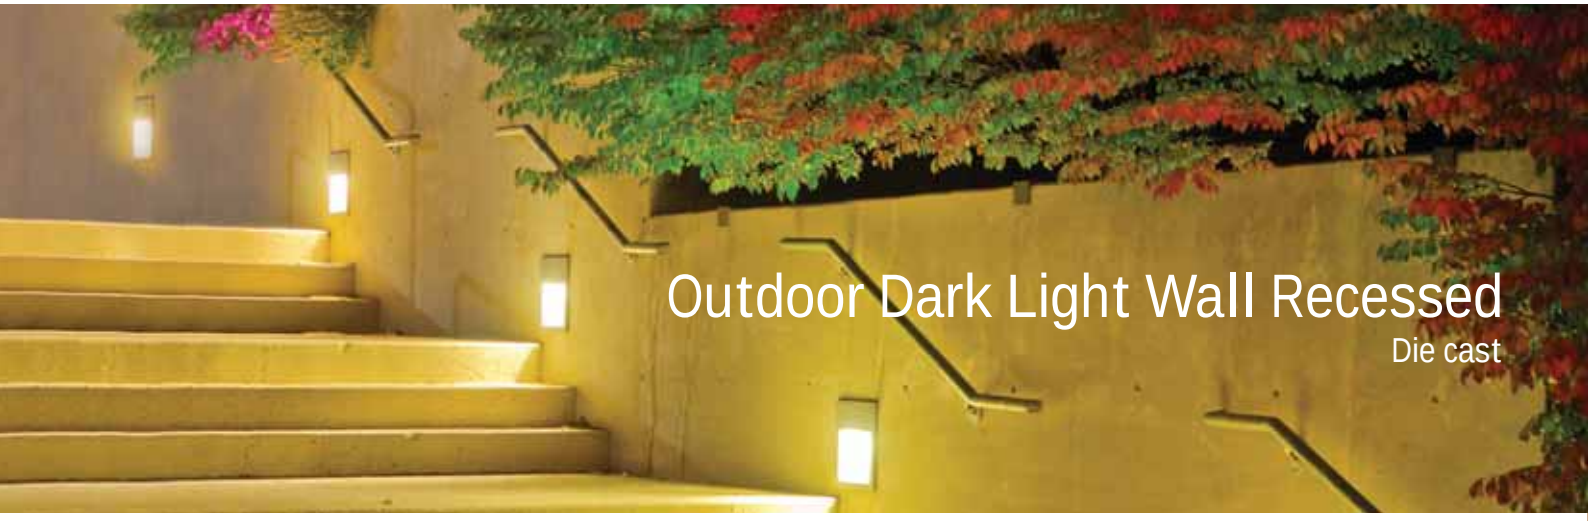

Outdoor Dark Light Wall Recessed


Die cast




68022 | 1,4W | LED | Die cast

IP54 DARK LIGHT

CE



Supplied with box for concrete installation & kit for gypsum installation.









68024 | 1,4W | LED | Die cast

IP54 DARK LIGHT

CE



Supplied with box for concrete installation & kit for gypsum installation.








68012 | 1,5W | LED | Die cast

IP54 DARK LIGHT

CE



Supplied with box for concrete installation & kit for gypsum installation.







68016 | 2,7W | LED | Die cast

IP54 DARK LIGHT

CE



Supplied with box for concrete installation & kit for gypsum installation.





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class				Notes
68022/G/W	Grey	Warm white	3000K	1,4W	230V	□	105mm	70mm	24	Complete with driver
68024/G/W	Grey	Warm white	3000K	1,4W	230V	□	105mm	70mm	24	Complete with driver
68012/G/D	Grey	Daylight	6000K	1,5W	230V	□	80x120mm	90mm	24	Complete with driver
68012/G/W	Grey	Warm white	3000K	1,5W	230V	□	80x120mm	90mm	24	Complete with driver
68016/G/W	Grey	Warm white	3000K	2,7W	230V	□	170x120mm	90mm	18	Complete with driver



Wall Recessed Light Line

Die cast




68044 | 3W | LED | Die cast

IP65 DARK LIGHT

CE



Supplied with box for concrete installation.





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class				Notes
68044/W/W	White	Warm white	3000K	3W	100-240V	⏚	40x185mm	80mm	18	Complete with driver



The COB Inground Range

2-6W




69028 | 2W | LED | Stainless steel 316

IP67 80 CRI

IK08 CE








69012 | 3W | COB LED | Stainless steel 316

IP67 80 CRI

CE








69038 | 6W | COB LED | Stainless steel 316

IP67 80 CRI

IK09 CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69028/W	Stainless steel	Warm white	3000K	2W	65lm	30°	230V		50cm	86mm	135mm+300mm drainage	24	Complete with driver
69012/W	Stainless steel	Warm white	3000K	3W	240lm	35°	100-240V		200cm	65mm	120mm+300mm drainage	20	Complete with driver
69038/W	Stainless steel	Warm white	3000K	6W	600lm	25°	230V		50cm	102mm	153mm+300mm drainage	8	Complete with driver





69040 | 10W | COB LED | Stainless steel 316

IP67 80 CRI

IK10 CE







69026 | 35W | COB LED | Stainless steel 316

IP67 80 CRI

IK09 CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69040/W	Stainless steel	Warm white	3000K	10W	700lm	25°	230V		50cm	106mm	185mm+300mm drainage	6	Complete with driver
69026/C	Stainless steel	Cool white	4000K	35W	2800lm	40°	100-240V		50cm	220mm	255mm+300mm drainage	4	Complete with driver
69026/W	Stainless steel	Warm white	3000K	35W	2700lm	40°	100-240V		50cm	220mm	255mm+300mm drainage	4	Complete with driver



The Inground Mini Series

Natural aluminium




69042 | 1W | SMD LED | Natural aluminium

Supplied with box for concrete installation.

IP67 85 CRI

DIMMABLE CE







69042A | 1W | SMD LED | Natural aluminium

Supplied with box for concrete installation.

IP67 85 CRI

DIMMABLE CE








69042B | 1W | SMD LED | Natural aluminium

Supplied with box for concrete installation.

IP67 85 CRI

DIMMABLE CE



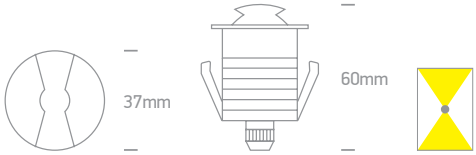



69044 | 1W | LED | Natural aluminium

Supplied with box for concrete installation.

IP67 85 CRI

DIMMABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Decking	Concrete	Decking	Concrete		Notes
69042/AL/W	Aluminium	Warm white	3000K	1W	80lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage	50	Requires 350mA driver
69042A/AL/W	Aluminium	Warm white	3000K	1W	30lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage	50	Requires 350mA driver
69042B/AL/W	Aluminium	Warm white	3000K	1W	50lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage	50	Requires 350mA driver
69044/AL/W	Aluminium	Warm white	3000K	1W	30lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage	50	Requires 350mA driver



The Inground Mini Series 3W
Aluminium




69016 | 3W | LED | Aluminium

IP67 80 CRI

CE








69016A | 3W | LED | Aluminium

IP67 80 CRI

CE








69016B | 3W | LED | Aluminium


IP67 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69016/W	Aluminium	Warm white	3000K	3W	120lm	100-240V		200cm	77mm	105mm+300mm drainage	18	Complete with driver
69016A/W	Aluminium	Warm white	3000K	3W	150lm	100-240V		200cm	77mm	105mm+300mm drainage	18	Complete with driver
69016B/W	Aluminium	Warm white	3000K	3W	100lm	100-240V		200cm	77cm	105mm+300mm drainage	18	Complete with driver

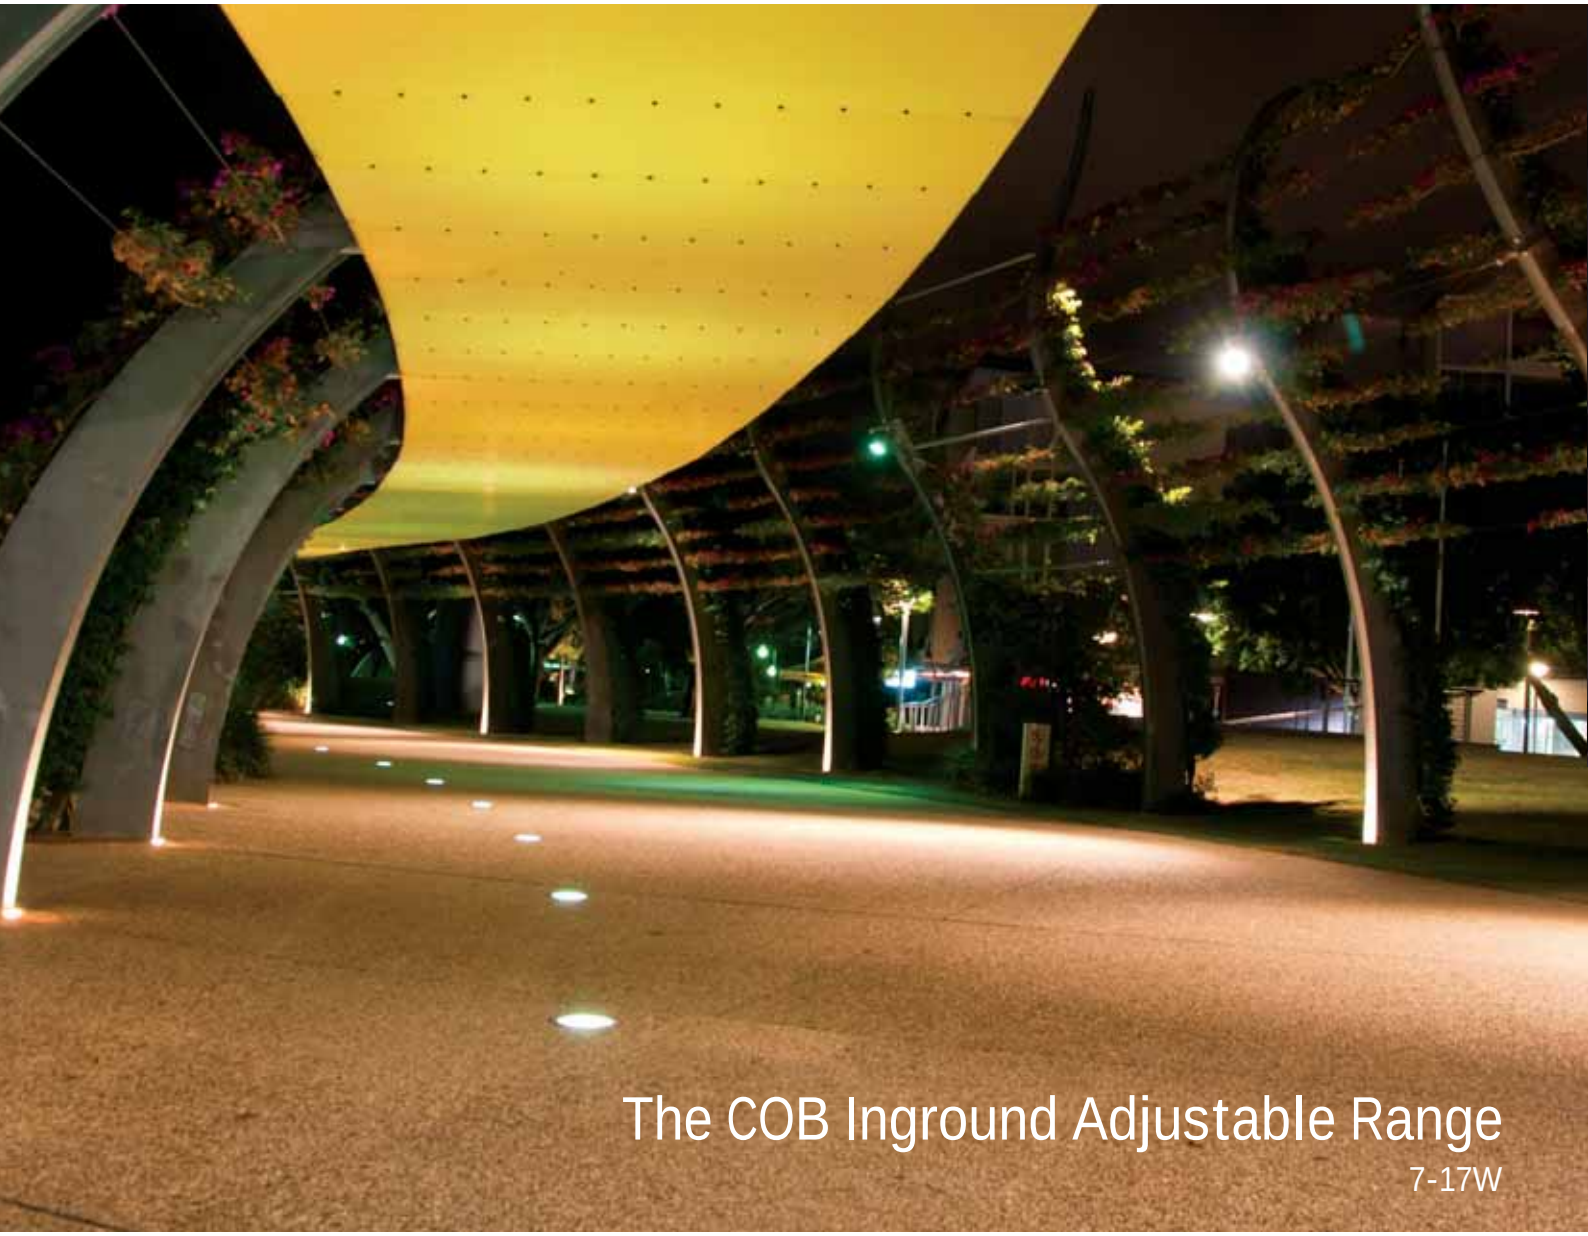

The COB Inground Adjustable Range

7-17W




69022 | 7W | COB LED | Stainless steel 316

IP67 80 CRI

ADJUSTABLE CE



2 glands






69024 | 17W | COB LED | Stainless steel 316

IP67 80 CRI

ADJUSTABLE CE



2 glands



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69022/W	Stainless steel	Warm white	3000K	7W	400lm	40°	100-240V		200cm	105mm	153mm+300mm drainage	8	Complete with driver
69024/W	Stainless steel	Warm white	3000K	17W	1050lm	30°	100-240V		100cm	205mm	240mm+300mm drainage	2	Complete with driver



Inground Decking Sets




69003 | 3x0,6W | LED | Natural aluminium

IP67

QUICK FIX



Set of 3pcs with connection box, outdoor transformer and boxes for concrete installation.






69002 | 10x0,2W | LED | Stainless steel 304

IP66

QUICK FIX



Set of 10pcs with independent plug + 1m cable.





69002/RGB | 10x0,2W | LED | Stainless steel 304


IP66

DIMMABLE

QUICK FIX



Set of 10pcs with independent plug + 1m cable, RGB remote, receiver + IR sensor with 3m cable.



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class					Notes
69003/W	Aluminium	Warm white	3000K	3x0,6W	230V	☐	2m/2m	33mm	80mm	8	-
69003/BL	Aluminium	Blue	-	3x0,6W	230V	☐	2m/2m	33mm	80mm	8	-
69003/GR	Aluminium	Green	-	3x0,6W	230V	☐	2m/2m	33mm	80mm	8	-
69002/W	Stainless steel	Warm white	3000K	10x0,2W	100-240V	☐	900cm	26mm	50mm	12	Complete with driver
69002/BL	Stainless steel	Blue	-	10x0,2W	100-240V	☐	900cm	26mm	50mm	12	Complete with driver
69002/RGB	Stainless steel	RGB	-	10x0,2W	100-240V	☐	900cm	26mm	50mm	12	Complete with driver



The GX53 Inground Range

Stainless steel




69006 | 9W | GX53 | Stainless steel

IP67

CE



Suitable for LED lamps.






69008 | 9W | GX53 | Stainless steel

IP67

CE



Suitable for LED lamps.



Order Code	Colour	Watts	Input	Class				Notes
69006	Stainless steel	9W	100-240V		110mm	90mm+300mm drainage	20	-
69008	Stainless steel	9W	100-240V		110mm	90mm+300mm drainage	20	-





69006G | 35W | MR16 | GU10 | Stainless steel 316

IP67

CE







69008G | 35W | MR16 | GU10 | Stainless steel 316

IP67

CE





Order Code	Colour	Watts	Input	Class				Notes
69006G	Stainless steel	35W	100-240V	⏚	101mm	160mm+300mm drainage	20	2 glands
69008G	Stainless steel	35W	100-240V	⏚	101mm	160mm+300mm drainage	20	2 glands





20

Garden & Underwater

Pages 453-480

MR16 | GU10 | E27 | LED | COB LED

Die cast | Natural aluminium | Stainless steel | Acrylic | Metal | Teak

IP43 IP44 IP54 IP65 IP68





Garden Spots
Aluminium



67198G | 35W | MR16 | GU10 | Aluminium

IP65 ADJUSTABLE CE



Supplied with spike.








67198AG | 35W | MR16 | GU10 | Aluminium

IP65 ADJUSTABLE CE



Supplied with spike
& 400mm pole stand.








67128 | 3x1W | LED | Aluminium

IP54 ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class			Notes
67198G/AN	Anthracite	-	-	35W	100-240V	⏚	150cm	12	-
67198AG/AN	Anthracite	-	-	35W	100-240V	⏚	150cm	6	-
67128/C/D	Chrome	Daylight	6000K	3x1W	230V	⏚	-	12	Complete with driver



Garden Spots

Stainless steel




7008L | 3x1W | LED | Stainless steel 304

IP65 ADJUSTABLE CE



Supplied with base & spike.






7008A | 35W | MR16 | GU10 | Stainless steel 316

IP65 ADJUSTABLE CE



Supplied with base & spike.






7010 | 80W | PAR38 | E27 | Stainless steel 304

IP65 ADJUSTABLE CE



Supplied with base & spike.






7010A | 80W | PAR38 | E27 | Stainless steel 316

IP65 ADJUSTABLE CE



Supplied with base & spike.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
7008L/W	Stainless steel	Warm white	3000K	3x1W	245lm	230V	⏚	100cm	18	Complete with driver
7008A	Stainless steel	-	-	35W	-	100-240V	⏚	200cm	20	-
7010	Stainless steel	-	-	80W	-	100-240V	⏚	200cm	8	-
7010A	Stainless steel	-	-	80W	-	100-240V	⏚	200cm	8	-



7047/AL/W



7046/AL/W

The COB Garden Spots


Aluminium



7046 | 10W | COB LED | Aluminium — Supplied with spike.

IP65

ADJUSTABLE








7047 | 20W | COB LED | Aluminium — Supplied with spike.

IP65

ADJUSTABLE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7046/AL/W	Aluminium	Warm white	3000K	10W	850lm	50°	230V		150cm	12	Complete with driver
7046/W/W	White	Warm white	3000K	10W	850lm	50°	230V		150cm	12	Complete with driver
7047/AL/W	Aluminium	Warm white	3000K	20W	1800lm	50°	230V		150cm	8	Complete with driver
7047/W/W	White	Warm white	3000K	20W	1800lm	50°	230V		150cm	8	Complete with driver



The COB Garden Spots
Aluminium




7046 | 10W | COB LED | Aluminium

Supplied with spike.

IP65

ADJUSTABLE








7047 | 20W | COB LED | Aluminium

Supplied with spike.

IP65

ADJUSTABLE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7046/AN/W	Anthracite	Warm white	3000K	10W	850lm	50°	230V		150cm	12	Complete with driver
7047/AN/W	Anthracite	Warm white	3000K	20W	1800lm	50°	230V		150cm	8	Complete with driver



The Garden Square Spots

Die cast




7052 | 7W | COB LED | Die cast

IP65

80 CRI ADJUSTABLE CE



Supplied with spike.








7052A | 5W | LED | Die cast

IP65

80 CRI ADJUSTABLE CE



Supplied with spike.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7052/AN/W	Anthracite	Warm white	3000K	7W	550lm	47°	100-240V	⏚	100cm	12	Complete with driver
7052A/AN/W	Anthracite	Warm white	3000K	5W	280lm	25°	230V	⏚	150cm	8	Complete with driver


67196C/AN/W


67196BG/G


67196BG/W

The Garden Round Spots


Die cast



67196BG | 35W | MR16 | GU10 | Die cast

IP65 | ADJUSTABLE | CE


Supplied with spike.








67196A | 3W | COB LED | Die cast

IP65 | 85 CRI | ADJUSTABLE | CE


Supplied with spike.








67196B | 6W | COB LED | Die cast

IP65 | 85 CRI | ADJUSTABLE | CE


Supplied with spike.








67196C | 9W | COB LED | Die cast

IP65 | 85 CRI | ADJUSTABLE | CE


Supplied with spike.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
67196BG/W	White	-	-	35W	-	-	100-240V		150cm	6	-
67196BG/G	Grey	-	-	35W	-	-	100-240V		150cm	6	-
67196BG/AN	Anthracite	-	-	35W	-	-	100-240V		150cm	6	-
67196A/AN/W	Anthracite	Warm white	3000K	3W	240lm	35°	100-240V		150cm	12	Complete with driver
67196B/AN/W	Anthracite	Warm white	3000K	6W	450lm	35°	230V		150cm	6	Complete with driver
67196C/AN/W	Anthracite	Warm white	3000K	9W	700lm	35°	230V		150cm	6	Complete with driver

one

The E27 Tube Light


Die cast



67060 | 15W | E27 | Die cast

IP54

CE



Order Code	Colour	Watts	Input	Class		Notes
67060/BR	Rust brown	15W	100-240V	⏚	18	-



The E27 Tube Lights


Die cast



67090 | 15W | E27 | Die cast

IP54

CE





67092 | 15W | E27 | Die cast

IP54

CE



Order Code	Colour	Watts	Input	Class		Notes
67090/G	Grey	15W	100-240V		12	-
67092/G	Grey	15W	100-240V		6	-



The E27 Tube Lights

Die cast



67094/G

67094 | 20W | E27 | Die cast

IP54


67094/AN


67094/BR





67098/G

67098 | 2x20W | E27 | Die cast

IP54


67098/AN


67098/BR



Order Code	Colour	Watts	Input	Class		Notes
67094/G	Grey	20W	100-240V		12	-
67094/AN	Anthracite	20W	100-240V		12	-
67094/BR	Rust brown	20W	100-240V		12	-
67098/G	Grey	2x20W	100-240V		12	-
67098/AN	Anthracite	2x20W	100-240V		12	-
67098/BR	Rust brown	2x20W	100-240V		12	-



The E27 Tube Lights

Die cast



67100/G

67100 | 20W | E27 | Die cast

IP54


CE



67100/AN



67100/BR





67102/G

67102 | 20W | E27 | Die cast

IP54


CE



67102/AN



67102/BR



Order Code	Colour	Watts	Input	Class		Notes
67100/G	Grey	20W	100-240V		4	-
67100/AN	Anthracite	20W	100-240V		4	-
67100/BR	Rust brown	20W	100-240V		4	-
67102/G	Grey	20W	100-240V		4	-
67102/AN	Anthracite	20W	100-240V		4	-
67102/BR	Rust brown	20W	100-240V		4	-



67182/G

67180/G

The E27 Mushroom Range

Die cast + plastic



67180/AN

67180 | 15W | E27 | Die cast + plastic

IP44

CE



67180/G







67182/AN

67182 | 15W | E27 | Die cast + plastic

IP44

CE



67182/G





Order Code	Colour	Watts	Input	Class		Notes
67180/G	Grey	15W	100-240V		4	-
67180/AN	Anthracite	15W	100-240V		4	-
67182/G	Grey	15W	100-240V		4	-
67182/AN	Anthracite	15W	100-240V		4	-



The Round Bollards


Natural aluminium + acrylic



67270 | 16W | E27 | Natural aluminium + acrylic

IP54

CE






67272 | 16W | E27 | Natural aluminium + acrylic

IP54

CE



Order Code	Colour	Watts	Input	Class		Notes
67270/AL	Aluminium	16W	100-240V		10	-
67272/AL	Aluminium	16W	100-240V		4	-

The Natural Aluminium Bollards



67238/AL




67236/AL



67236 | 15W | E27 | Natural aluminium

IP54

CE







67236A | 15W | E27 | Natural aluminium

IP54

CE








67238 | 15W | E27 | Natural aluminium

IP54

CE








67238A | 15W | E27 | Natural aluminium

IP54

CE








67042 | 25W | G9 | Natural aluminium

IP54

CE




Suitable for LED lamps.





Order Code	Colour	Watts	Input	Class		Notes
67236/AL	Aluminium	15W	100-240V		4	-
67236A/AL	Aluminium	15W	100-240V		4	-
67238/AL	Aluminium	15W	100-240V		10	-
67238A/AL	Aluminium	15W	100-240V		4	-
67042/AL	Aluminium	25W	100-240V		1	-

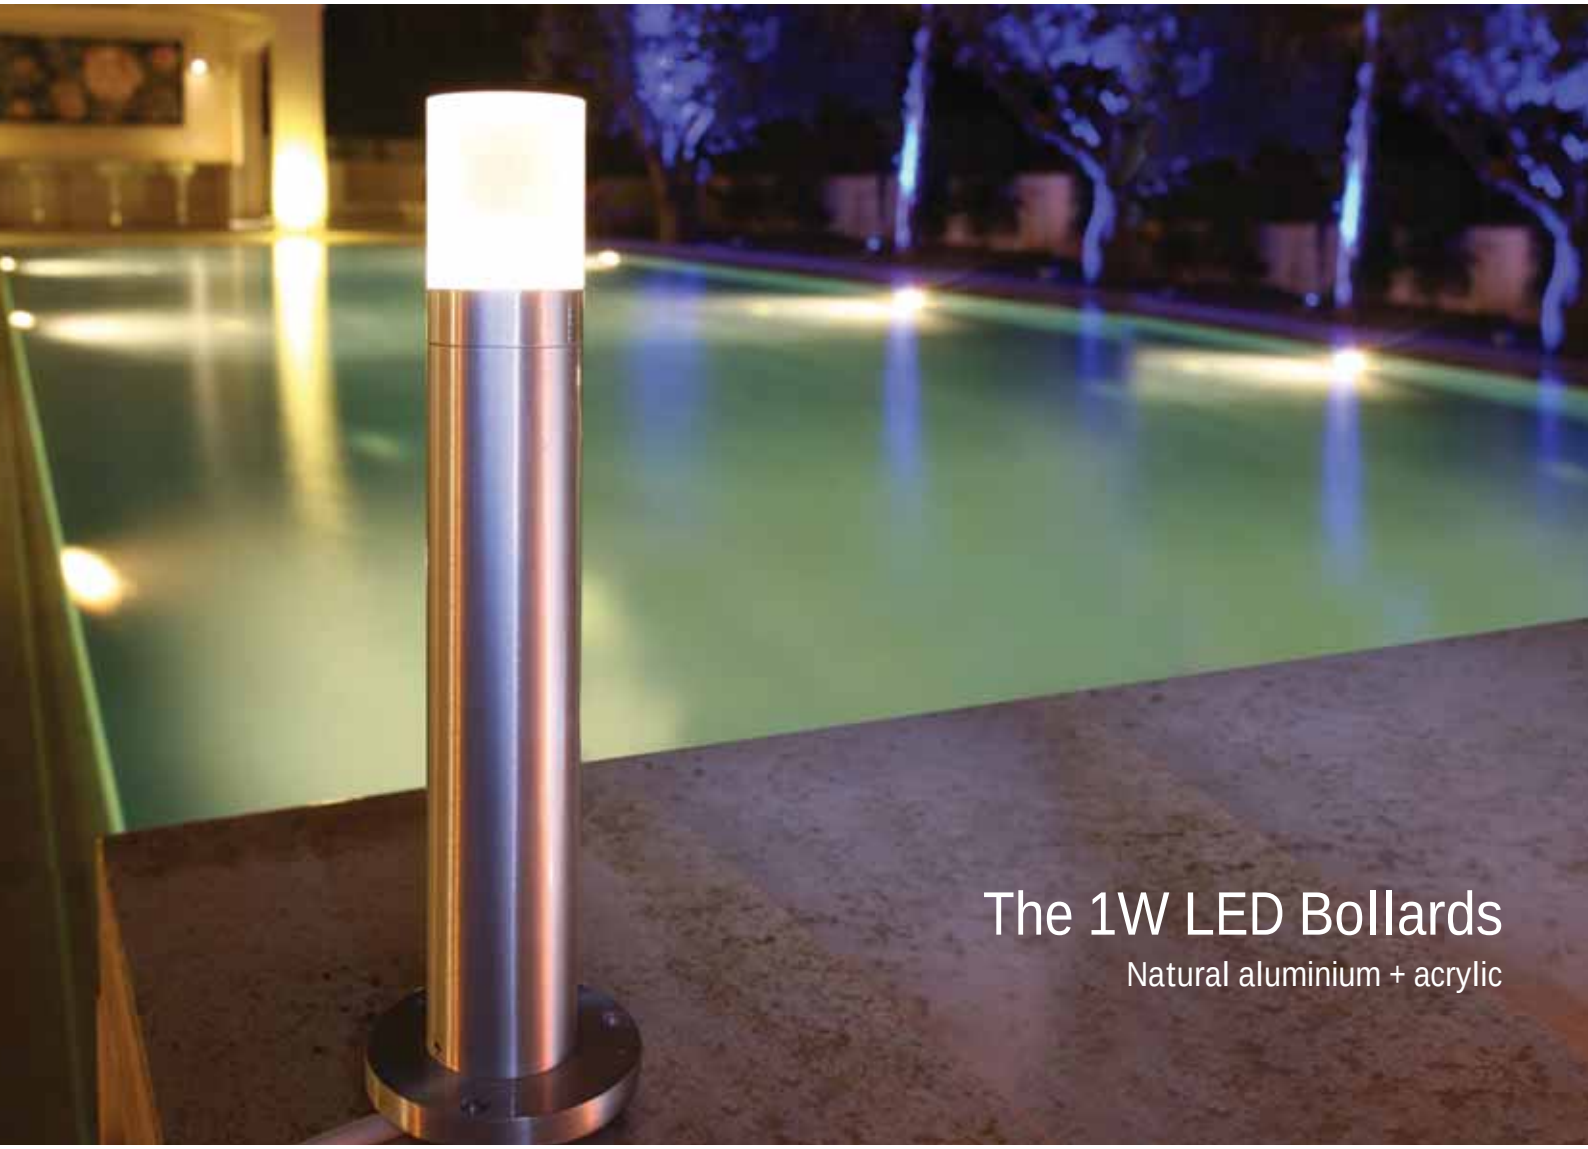

The 1W LED Bollards


Natural aluminium + acrylic



67234 | 1W | LED | Natural aluminium + acrylic

IP54

CE






67234A | 1W | LED | Natural aluminium + acrylic

IP54

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
67234/AL/D	Aluminium	Daylight	6000K	1W	230V		10	Complete with driver
67234/AL/W	Aluminium	Warm white	3000K	1W	230V		10	Complete with driver
67234A/AL/D	Aluminium	Daylight	6000K	1W	230V		4	Complete with driver
67234A/AL/W	Aluminium	Warm white	3000K	1W	230V		4	Complete with driver

one



The LED Dark Light Range

Natural aluminium




67256 | 3W | LED | Natural aluminium

IP54 DARK LIGHT

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
67256/AL/W	Aluminium	Warm white	3000K	3W	230V		12	Complete with driver



The LED Bollards Range

Die cast




67036 | 12W | COB LED | Die cast

IP54 80 CRI

CE









67034/G/W


67034 | 12W | COB LED | Die cast

IP54 80 CRI

CE



67034/AN/W








67410 | 12W | SMD 2835 | Die cast

IP65 80 CRI

CE










67410A | 20W | SMD 2835 | Die cast

IP65 80 CRI


CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Beam Angle	Lumen (lm)	Input	Class		Notes
67036/G/W	Grey	Warm white	3000K	12W	50°	300lm	100-240V		4	Complete with driver
67034/G/W	Grey	Warm white	3000K	12W	50°	300lm	100-240V		4	Complete with driver
67034/AN/W	Anthracite	Warm white	3000K	12W	50°	300lm	100-240V		4	Complete with driver
67410/AN/C	Anthracite	Cool white	4000K	12W	-	1000lm	230V		2	Complete with driver
67410/AN/W	Anthracite	Warm white	3000K	12W	-	1000lm	230V		2	Complete with driver
67410A/AN/C	Anthracite	Cool white	4000K	20W	-	1600lm	230V		2	Complete with driver

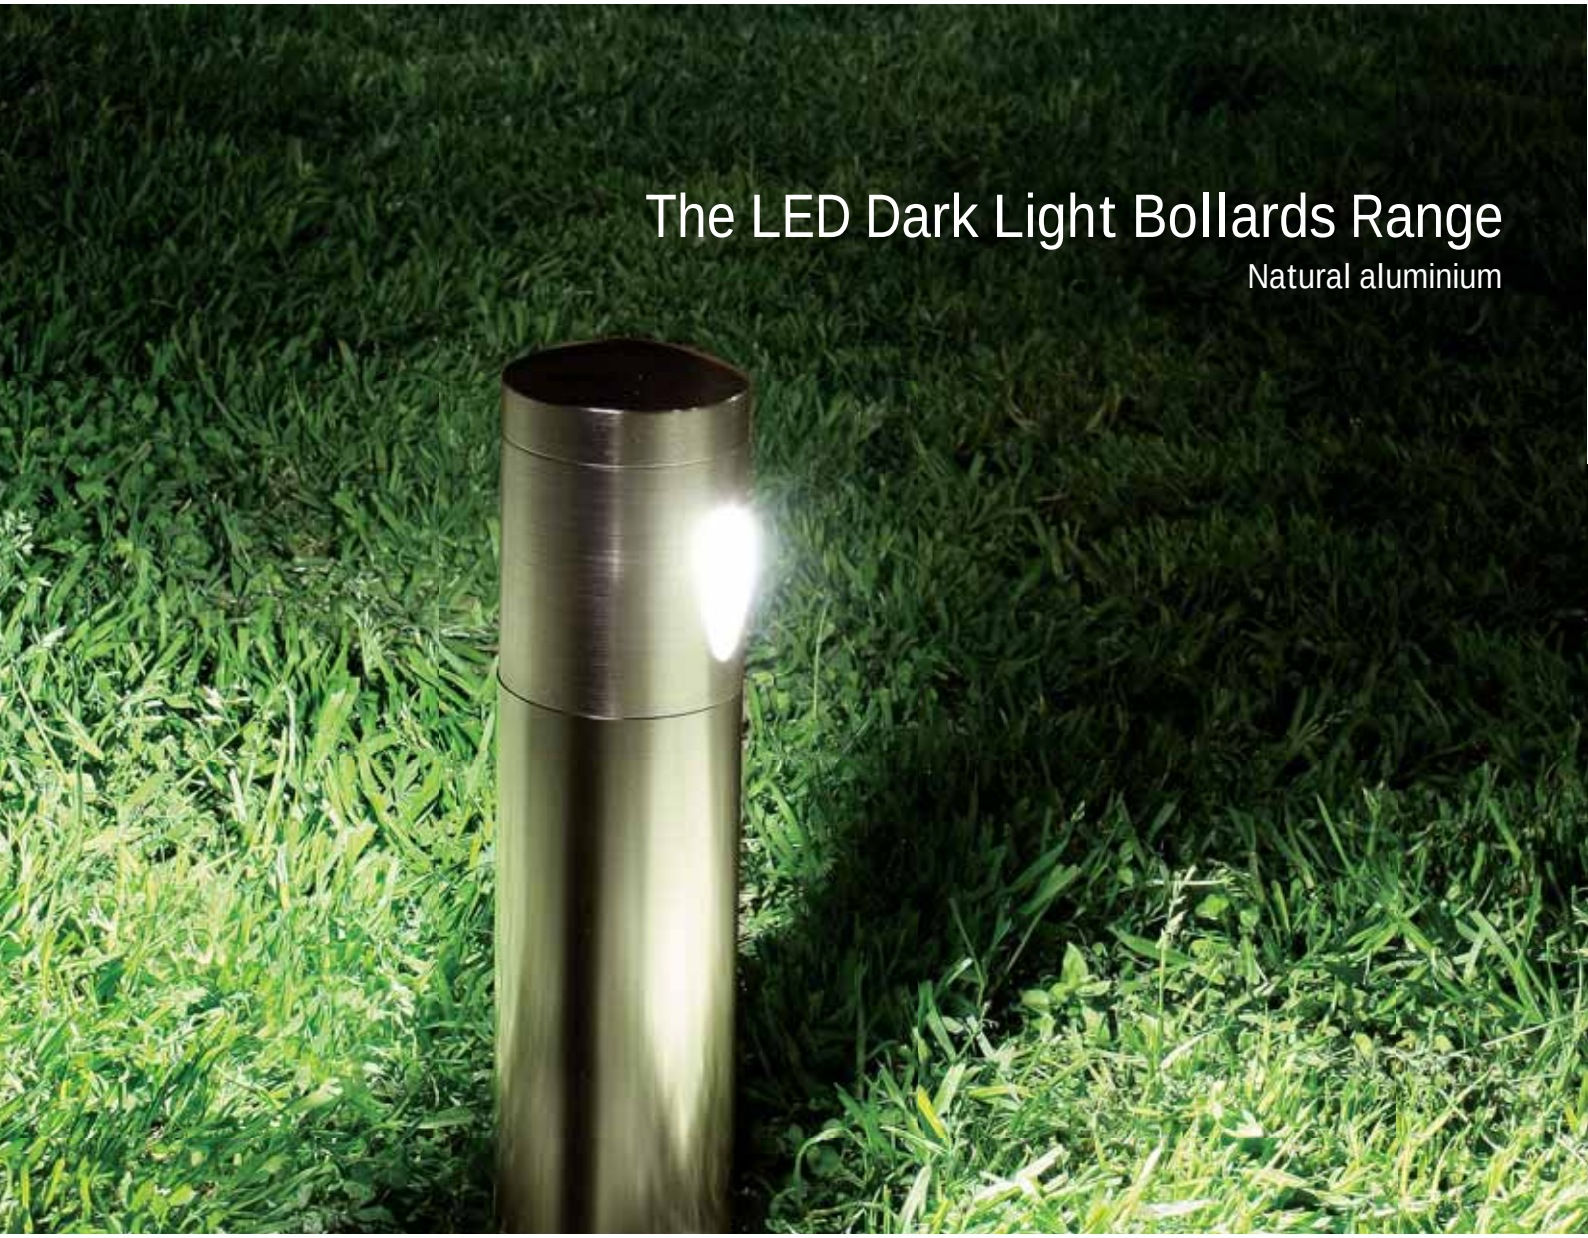

The LED Dark Light Bollards Range


Natural aluminium



67246 | 4x1W | LED | Natural aluminium

IP54 DARK LIGHT

CE






67250A | 2x3W | LED | Natural aluminium

IP54 DARK LIGHT

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
67246/AL/W	Aluminium	Warm white	3000K	4x1W	230V		6	Complete with driver
67250A/AL/W	Aluminium	Warm white	3000K	2x3W	230V		4	Complete with driver



The LED Dark Light Bollards Range


Die cast



67244 | 4x1W | LED | Die cast

IP54 DARK LIGHT

CE






67246 | 4x1W | LED | Die cast

IP54 DARK LIGHT

CE






67248 | 2x3W | LED | Die cast

IP54 DARK LIGHT

CE






67250 | 2x3W | LED | Die cast

IP54 DARK LIGHT

CE




Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class		Notes
67244/G/D	Grey	Daylight	6000K	4x1W	230V		12	Complete with driver
67246/G/D	Grey	Daylight	6000K	4x1W	230V		6	Complete with driver
67246/G/W	Grey	Warm white	3000K	4x1W	230V		6	Complete with driver
67248/G/D	Grey	Daylight	6000K	2x3W	230V		10	Complete with driver
67250/G/D	Grey	Daylight	6000K	2x3W	230V		8	Complete with driver
67250/G/W	Grey	Warm white	3000K	2x3W	230V		8	Complete with driver



The Outdoor LED Bollard


Die cast

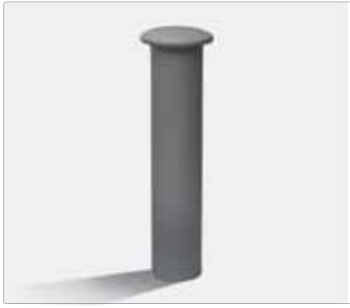

67344 | 10W | LED | Die cast

IP54

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
67344/G/W	Grey	Warm white	3000K	10W	340lm	230V		2	Complete with driver



LED Path Light


Die cast



67358 | 7W | COB LED | Die cast

IP65 80 CRI







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
67358/G/W	Grey	Warm white	3000K	7W	262lm	49°	100-240V	⏚	8	Complete with driver
67358/AN/W	Anthracite	Warm white	3000K	7W	262lm	49°	100-240V	⏚	8	Complete with driver






67002 | 15W | E27 | Stainless steel 201

IP44

CE








67004 | 15W | E27 | Stainless steel 201

IP44

CE







67056 | 20W | E27 | Stainless steel 304

IP44

CE





Order Code	Colour	Watts	Input	Class		Notes
67002	Stainless steel	15W	100-240V		6	-
67004	Stainless steel	15W	100-240V		12	-
67056	Stainless steel	20W	100-240V		4	-



The Garden Stainless Steel Range



67012 | 15W | E27 | Stainless steel

IP44

CE





67014 | 15W | E27 | Stainless steel

IP44

CE



Order Code	Colour	Watts	Input	Class		Notes
67012	Stainless steel	15W	100-240V		12	-
67014	Stainless steel	15W	100-240V		6	-



67286

67010W


The Garden Teak Wood Range



67010W | 15W | E27 | Teak + stainless steel

IP44

CE



360mm






67286 | 15W | E27 | Teak + stainless steel 316

IP44

CE



300mm





67290 | 15W | E27 | Teak + stainless steel 316

IP44

CE



650mm



Order Code	Colour	Watts	Input	Class		Notes
67010W	Teak + stainless steel	15W	100-240V		6	-
67286	Teak + stainless steel	15W	100-240V		4	-
67290	Teak + stainless steel	15W	100-240V		4	-


Retro Wall Lantern



67408 | 40W | E27 | Metal + glass

IP44

CE



Order Code	Colour	Watts	Input	Class		Notes
67408/B	Black	40W	100-240V	⏚	4	-



The Romantic Outdoor Range



67406/B

67406 | 40W | E27 | Stainless steel 201 + tempered glass

IP43

CE


67406/W





67406A/B

67406A | 40W | E27 | Stainless steel 201 + tempered glass

IP43

CE


67406A/W





67406B/B

67406B | 2x40W | E27 | Stainless steel 201 + tempered glass

IP43

CE


67406B/W





67406C/B

67406C | 40W | E27 | Stainless steel 201 + tempered glass

IP43

CE


67406C/W



Order Code	Colour	Watts	Input	Class		Notes
67406/W	White	40W	100-240V		4	-
67406/B	Black	40W	100-240V		4	-
67406A/W	White	40W	100-240V		4	-
67406A/B	Black	40W	100-240V		4	-
67406B/W	White	2x40W	100-240V		4	-
67406B/B	Black	2x40W	100-240V		4	-
67406C/W	White	40W	100-240V		4	-
67406C/B	Black	40W	100-240V		4	-





67406D/B


67406D | 2x40W | E27 | Stainless steel 201 + tempered glass

IP43

CE



67406D/W







67406E/B

67406E | 40W | E27 | Stainless steel 201 + tempered glass

IP43

CE



67406E/W





Order Code	Colour	Watts	Input	Class		Notes
67406D/W	White	2x40W	100-240V		2	-
67406D/B	Black	2x40W	100-240V		2	-
67406E/W	White	40W	100-240V		4	-
67406E/B	Black	40W	100-240V		4	-





The LED Underwater Range

Stainless steel




69032 | 3W | LED | Stainless steel 316 — Underwater only.

IP68 80 CRI

ADJUSTABLE · IK06 · 1m max · CE








69036 | 12W | LED | Stainless steel 316 — Underwater only.

IP68 80 CRI

ADJUSTABLE · IK08 · 1m max · CE








69034 | 12W | LED | Stainless steel 316 — Underwater only.


IP68 80 CRI

ADJUSTABLE · IK08 · 1m max · CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
69032/C	Stainless steel	Cool white	4000K	3W	150lm	30°	24V DC	III	300cm	8	Requires 24V DC driver
69036/C	Stainless steel	Cool white	4000K	12W	1100lm	25°	24V DC	III	300cm	4	Requires 24V DC driver
69034/C	Stainless steel	Cool white	4000K	12W	545lm	30°	24V DC	III	300cm	4	Requires 24V DC driver

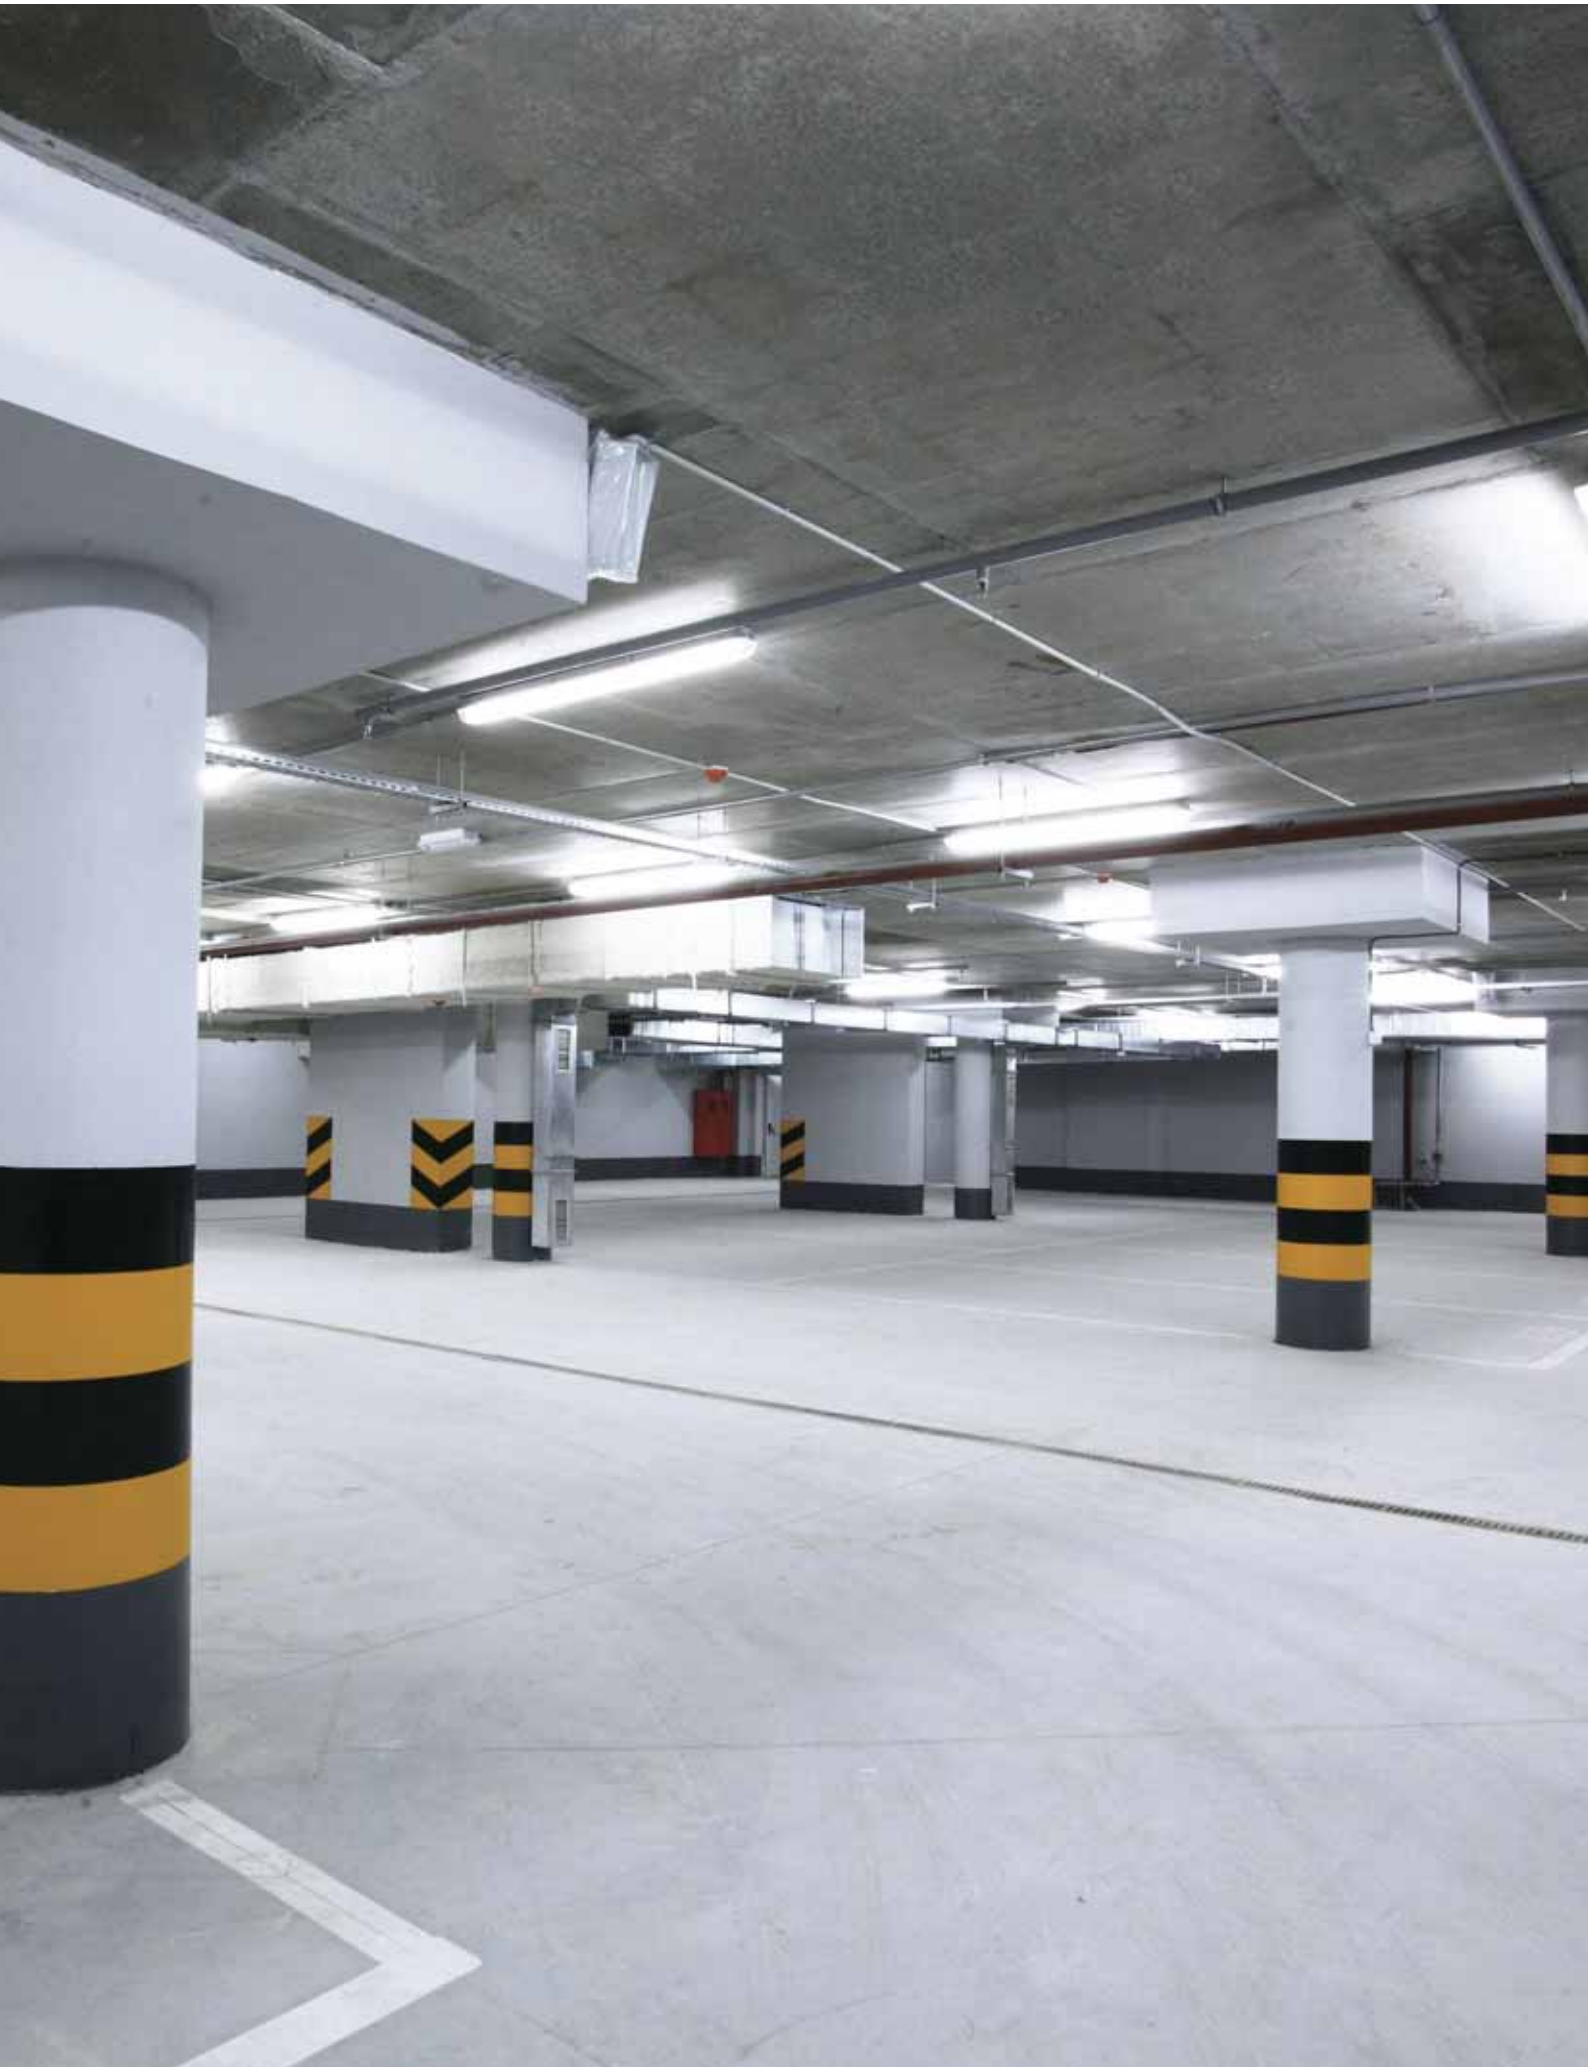



21

Industrial & Floodlights

Pages 483-510

T8 | Rx7s | COB LED | SMD LED | LED

Die cast | Aluminium | Metal

IP20 IP44 IP65 IP67

ADJUSTABLE ADJUSTABLE IK06 IK08 70 CRI 75 CRI 80 CRI



www.1-light.eu





38118E | T8 LED 60cm | PC + PC

38136E | T8 LED 120cm | PC + PC


38158E | T8 LED 150cm | PC + PC

IP65

IK06

CE



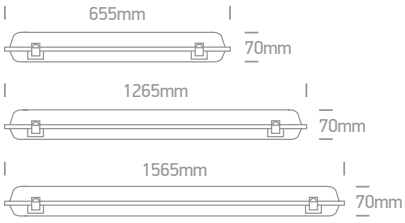



38218E | 2xT8 LED 60cm | PC + PC

38236E | 2xT8 LED 120cm | PC + PC


38258E | 2xT8 LED 150cm | PC + PC

IP65

IK06

CE



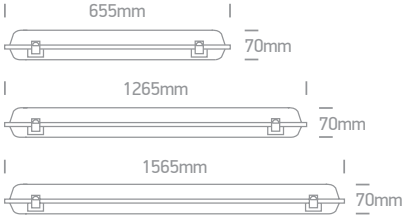

Order Code	Colour	Input	Class		Notes
38118E	Grey	100-240V		15	Only suitable for T8 LED tubes
38136E	Grey	100-240V		9	Only suitable for T8 LED tubes
38158E	Grey	100-240V		9	Only suitable for T8 LED tubes
38218E	Grey	100-240V		9	Only suitable for T8 LED tubes
38236E	Grey	100-240V		9	Only suitable for T8 LED tubes
38258E	Grey	100-240V		9	Only suitable for T8 LED tubes



38136L/C

The IP65 LED Range

PC + PC



38118L | 11,5W | SMD LED | PC + opal PC diffuser

IP65 80 CRI

IK06 CE









38136L | 23W | SMD LED | PC + opal PC diffuser

IP65 80 CRI

IK06 CE









38158L | 30W | SMD LED | PC + opal PC diffuser

IP65 80 CRI

IK06 CE









38236L | 48W | SMD LED | PC + opal PC diffuser

IP65 80 CRI

IK06 CE









38258L | 58W | SMD LED | PC + opal PC diffuser

IP65 80 CRI

IK06 CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38118L/C	Grey	Cool white	4000K	11,5W	950lm	230V		12	Complete with driver / Stainless steel clips
38136L/C	Grey	Cool white	4000K	23W	2000lm	230V		6	Complete with driver / Stainless steel clips
38158L/C	Grey	Cool white	4000K	30W	2500lm	100-240V		6	Complete with driver / Stainless steel clips
38236L/C	Grey	Cool white	4000K	48W	4000lm	230V		4	Complete with driver / Stainless steel clips
38258L/C	Grey	Cool white	4000K	58W	5000lm	230V		4	Complete with driver / Stainless steel clips





38136P | 36W | T8 | PC + PC

IP65

IK06 CE





38158P | 58W | T8 | PC + PC

IP65

IK06 CE





38218P | 2x18W | T8 | PC + PC

IP65

IK06 CE





38236P | 2x36W | T8 | PC + PC

IP65

IK06 CE





38258P | 2x58W | T8 | PC + PC

IP65

IK06 CE



Order Code	Colour	Watts	Input	Class		Notes
38136P	Grey	36W	230V		9	Complete with electronic ballast
38158P	Grey	58W	230V		9	Complete with electronic ballast
38218P	Grey	2x18W	230V		9	Complete with electronic ballast
38236P	Grey	2x36W	230V		8	Complete with electronic ballast
38258P	Grey	2x58W	230V		8	Complete with electronic ballast



The IP65 LED Slim Range

PC



38118LA | 18W | SMD 2835 | PC

IP65

80 CRI

IK08


CE



Optional suspension kit. Order code 050084.



Complete with 2pcs fixing clips.





38136LA | 36W | SMD 2835 | PC

IP65

80 CRI

IK08

CE



Optional suspension kit. Order code 050084.



Complete with 3pcs fixing clips.





38145LA | 45W | SMD 2835 | PC

IP65

80 CRI

IK08


CE



Optional suspension kit. Order code 050084.



Complete with 4pcs fixing clips.

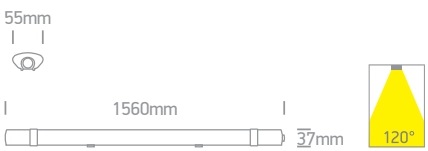

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38118LA/D	White	Daylight	6000K	18W	1600lm	120°	100-240V	☐	50cm	20	Complete with driver
38118LA/C	White	Cool white	4000K	18W	1600lm	120°	100-240V	☐	50cm	20	Complete with driver
38136LA/D	White	Daylight	6000K	36W	3200lm	120°	100-240V	☐	50cm	20	Complete with driver
38136LA/C	White	Cool white	4000K	36W	3200lm	120°	100-240V	☐	50cm	20	Complete with driver
38145LA/D	White	Daylight	6000K	45W	4100lm	120°	100-240V	☐	50cm	20	Complete with driver
38145LA/C	White	Cool white	4000K	45W	4100lm	120°	100-240V	☐	50cm	20	Complete with driver



The Supermarket LED Linear Range

Aluminium + PC




38136R | 22W | SMD LED | Single | Aluminium + PC

IP20 80 CRI

CE








38236R | 43W | SMD LED | Double | Aluminium + PC

IP20 80 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38136R/C	Grey	Cool white	4000K	22W	1880lm	120°	100-240V		100cm	10	Complete with driver
38236R/C	Grey	Cool white	4000K	43W	3800lm	120°	100-240V		100cm	10	Complete with driver

The Batten For T8 LED




38120E | 1xT8 LED 60cm | Metal

IP20

CE



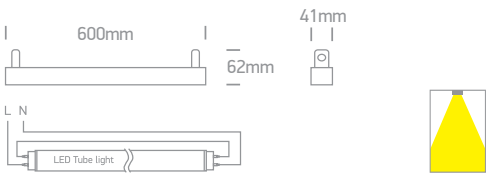




38140E | 1xT8 LED 120cm | Metal

IP20

CE



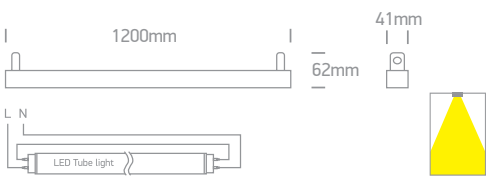




38165E | 1xT8 LED 150cm | Metal

IP20

CE



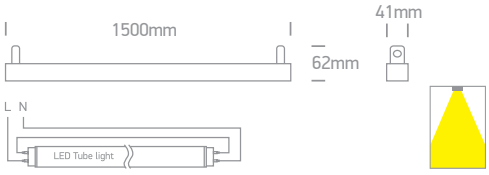




38220E | 2xT8 LED 60cm | Metal

IP20

CE



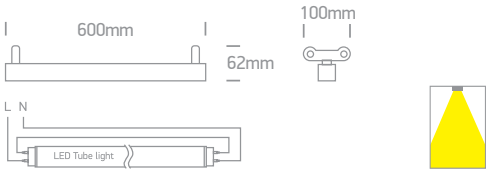




38240E | 2xT8 LED 120cm | Metal

IP20

CE



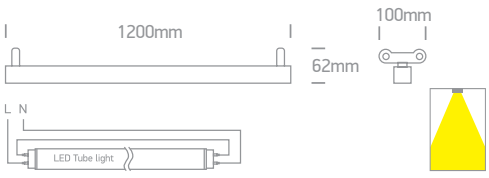




38265E | 2xT8 LED 150cm | Metal

IP20

CE



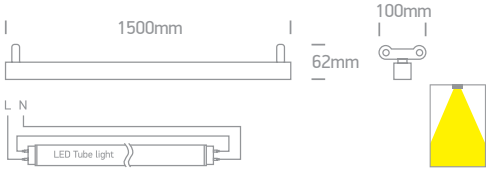

Order Code	Colour	Input	Class		Notes
38120E	White	100-240V		20	Only suitable for T8 LED tubes
38140E	White	100-240V		20	Only suitable for T8 LED tubes
38165E	White	100-240V		20	Only suitable for T8 LED tubes
38220E	White	100-240V		20	Only suitable for T8 LED tubes
38240E	White	100-240V		20	Only suitable for T8 LED tubes
38265E	White	100-240V		20	Only suitable for T8 LED tubes






7056 | 50W | COB LED | Die cast

IP65 70 CRI

CE

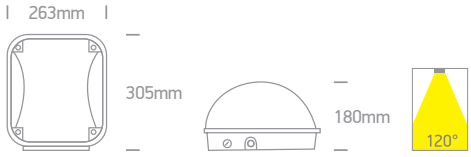




7056A | 50W | COB LED | Die cast

IP65 80 CRI

CE

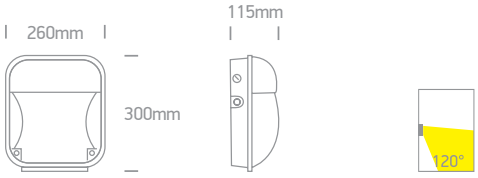




7056B | 60W | COB LED | Die cast

IP65 70 CRI

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
7056/C	Black	Cool white	4000K	50W	4000lm	120°	100-240V		4	Complete with driver
7056A/C	Black	Cool white	4000K	50W	4000lm	120°	100-240V		4	Complete with driver
7056B/C	Black	Cool white	4000K	2x30W	4800lm	120°	100-240V		1	Complete with driver







63100A | 100W | COB LED | High Bay | Die cast

IP65 70 CRI

CE










63200A | 200W | COB LED | High Bay | Die cast

IP65 70 CRI


CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63100A/G/C	Grey	Cool white	4000K	100W	7530lm	90°	100-240V		300cm	1	Complete with driver
63200A/G/C	Grey	Cool white	4000K	200W	13037lm	90°	100-240V		300cm	1	Complete with driver

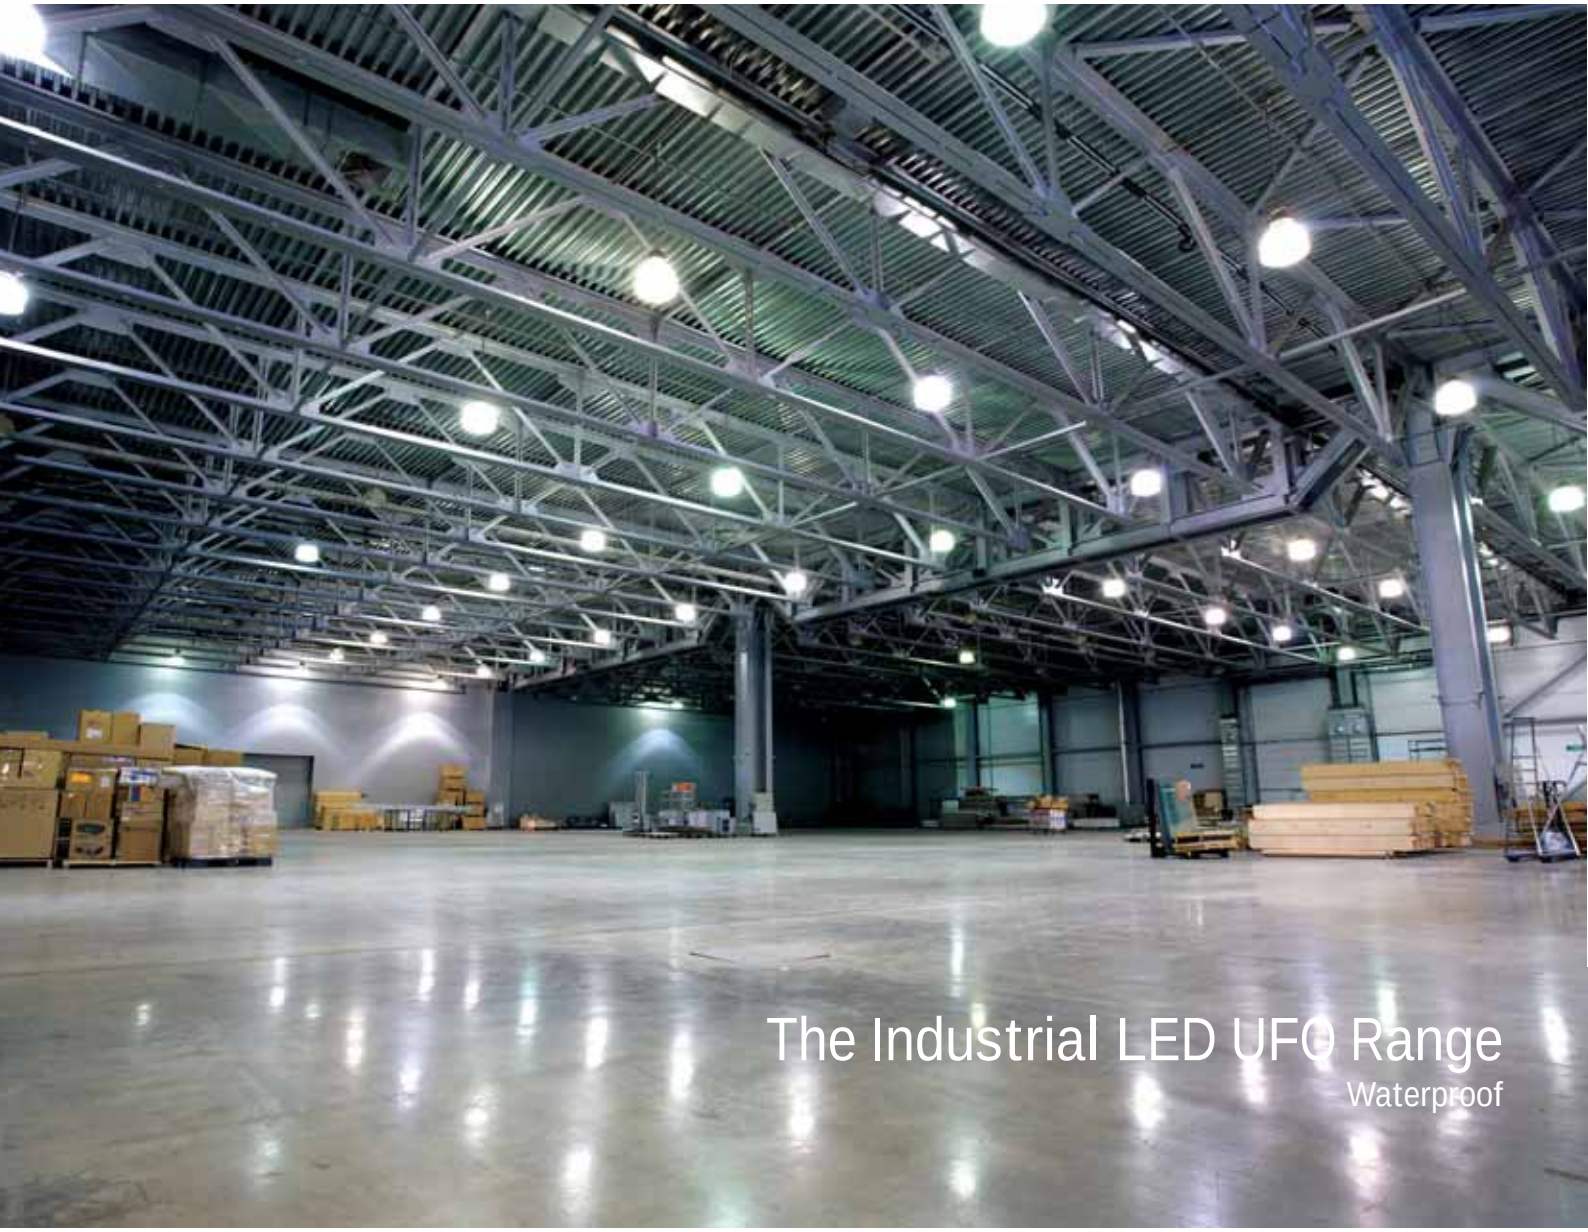



63100U | 100W | SMD 3030 | Die cast

IP65 80 CRI

CE










63200U | 200W | SMD 3030 | Die cast

IP65 80 CRI

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63100U/C	Black	Cool white	4000K	100W	12000lm	110°	100-240V	⏚	40cm	1	Complete with driver
63200U/C	Black	Cool white	4000K	200W	24000lm	110°	100-240V	⏚	40cm	1	Complete with driver

The Industrial LED High Bays

Aluminium



63100E/C



63100U/C




63100E | 100W | SMD 3030 | High bay | Aluminium

IP20 80 CRI

CE










63150E | 150W | SMD 3030 | High bay | Aluminium

IP20 80 CRI

CE










63200E | 200W | SMD 3030 | High bay | Aluminium

IP20 80 CRI

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class		Notes
63100E/C	Black	Cool white	4000K	100W	10000lm	100°	100-240V		4	Complete with driver
63150E/C	Black	Cool white	4000K	150W	15000lm	100°	100-240V		4	Complete with driver
63200E/C	Black	Cool white	4000K	200W	20000lm	100°	100-240V		4	Complete with driver



The Rx7s Floodlight

Die cast



7020 | 150W | Rx7s 76mm | Die cast


IP54

ADJUSTABLE

CE



Suitable for 7605L LED lamp.



Order Code	Colour	Watts	Input	Class		Notes
7020/G/5	Grey	150W	230V	⏚	8	-



7022/G/D



7030/AN/C



7036/W/W


The LED Floodlights



7030 | 8x1W | LED | Die cast

IP54

ADJUSTABLE








7022 | 15x1W | LED | Die cast

IP65

ADJUSTABLE







7036 | 30W | LED | PC + Aluminium


IP67

80 CRI

ADJUSTABLE



Supplied with base.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7030/AN/C	Anthracite	Cool white	4000K	8x1W	600lm	20°	230V		-	12	Complete with driver
7022/G/D	Grey	Daylight	6000K	15x1W	1125lm	40°	100-240V		200cm	4	Complete with driver
7036/W/W	White	Warm white	3000K	30W	2700lm	110°	100-240V		150cm	12	Complete with driver



The RGB & Rechargeable LED Floodlights

Die cast




7028A/AN/RGB | 10W | COB LED | Die cast

IP65

ADJUSTABLE



Supplied with remote control.






7028B/AN/RGB | 30W | COB LED | Die cast

IP65

ADJUSTABLE



Supplied with remote control.





7028AR | 10W | COB LED | Rechargeable 5Hrs | 3Hrs operation

IP65 ADJUSTABLE

75 CRI



Supplied with AC charger 100-240V, EU/BS plug and car charger 12V.






7028BR | 20W | COB LED | Rechargeable 5Hrs | 3Hrs operation

IP65 ADJUSTABLE

75 CRI



Supplied with AC charger 100-240V, EU/BS plug and car charger 12V.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028A/AN/RGB	Anthracite	RGB	-	10W	-	120°	100-240V		100cm	20	Complete with driver
7028B/AN/RGB	Anthracite	RGB	-	30W	-	120°	100-240V		100cm	10	Complete with driver
7028AR/G/C	Grey	Cool white	4000K	10W	700lm	120°	8,4V DC		-	12	Complete with driver and batteries
7028BR/G/C	Grey	Cool white	4000K	20W	1650lm	120°	8,4V DC		-	8	Complete with driver and batteries



The Classic LED Floodlights

Die cast




7028A | 10W | COB LED | Die cast

IP65

70 CRI ADJUSTABLE CE










7028B | 30W | COB LED | Die cast

IP65

70 CRI ADJUSTABLE CE



Optional stand.
Order code 7028BP/G.







7032 | 150W | COB LED | Die cast

IP65

70 CRI ADJUSTABLE CE







7033 | 200W | COB LED | Die cast

IP65

75 CRI ADJUSTABLE CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028A/G/D	Grey	Daylight	6000K	10W	700lm	120°	100-240V		-	30	Complete with driver
7028A/G/W	Grey	Warm white	3000K	10W	700lm	120°	100-240V		-	30	Complete with driver
7028B/G/W	Grey	Warm white	3000K	30W	2150lm	120°	100-240V		-	4	Complete with driver
7032/AN/C	Anthracite	Cool white	4000K	3x50W	12000lm	120°	100-240V		200cm	1	Complete with driver
7033/AN/C	Anthracite	Cool white	4000K	4x50W	16000lm	120°	100-240V		200cm	1	Complete with driver





7048 | 12W | COB LED | Sensor | Die cast

IP54 ADJUSTABLE
70 CRI CE








7060 | 15W | SMD 2835 | Sensor | Aluminium + PC

IP44 ADJUSTABLE
70 CRI CE








7028AE | 10W | COB LED | Sensor | Die cast

IP65 ADJUSTABLE
70 CRI CE










7028BE | 30W | COB LED | Sensor | Die cast

IP65 ADJUSTABLE
75 CRI CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7048/G/D	Grey	Daylight	5000K	12W	824lm	90°	230V		-	8	Complete with driver
7060/W/C	White	Cool white	4000K	15W	1400lm	120°	100-240V		-	12	Complete with driver
7028AE/AN/C	Anthracite	Cool white	4000K	10W	700lm	120°	100-240V		100cm	12	Complete with driver
7028BE/AN/C	Anthracite	Cool white	4000K	30W	2200lm	120°	100-240V		100cm	4	Complete with driver



The Slim Line LED Floodlights


Die cast



7038 | 10W | COB LED | Die cast

IP65 | 70 CRI | ADJUSTABLE | CE










7040 | 30W | COB LED | Die cast

IP65 | 70 CRI | ADJUSTABLE | CE










7038E | 10W | COB LED | Sensor | Die cast

IP65 | 70 CRI | ADJUSTABLE | CE










7040E | 30W | COB LED | Sensor | Die cast

IP65 | 70 CRI | ADJUSTABLE | CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7038/G/D	Grey	Daylight	6000K	10W	700lm	120°	100-240V		100cm	10	Complete with driver
7038/G/W	Grey	Warm white	3000K	10W	700lm	120°	100-240V		100cm	10	Complete with driver
7040/G/D	Grey	Daylight	6000K	30W	2100lm	120°	100-240V		100cm	5	Complete with driver
7038E/G/C	Grey	Cool white	4000K	10W	700lm	120°	100-240V		100cm	8	Complete with driver
7040E/G/C	Grey	Cool white	4000K	30W	2100lm	120°	100-240V		100cm	5	Complete with driver

The COB LED Slim Line


Die cast





7034B | 50W | COB LED | Die cast


IP65 | 75 CRI | ADJUSTABLE | CE





7034C | 70W | COB LED | Die cast


IP65 | 75 CRI | ADJUSTABLE | CE





7034D | 100W | COB LED | Die cast

IP65 | 75 CRI | ADJUSTABLE | CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7034B/G/C	Grey	Cool white	4000K	50W	4050lm	130°	100-240V		100cm	10	Complete with driver
7034C/G/C	Grey	Cool white	4000K	70W	5600lm	130°	100-240V		100cm	6	Complete with driver
7034D/G/C	Grey	Cool white	4000K	2x50W	8000lm	130°	100-240V		100cm	4	Complete with driver


The COB LED Slim Floodlights

Die cast



7028A | 10W | COB LED | Die cast


IP65 | 70 CRI | ADJUSTABLE | CE

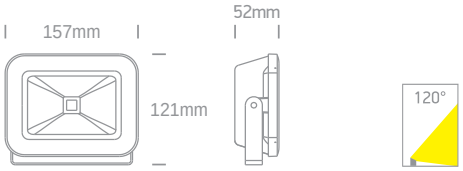



7028AB | 20W | COB LED | Die cast


IP65 | 70 CRI | ADJUSTABLE | CE

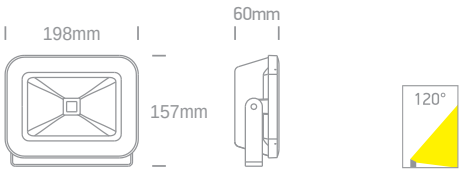



7028B | 30W | COB LED | Die cast


IP65 | 70 CRI | ADJUSTABLE | CE

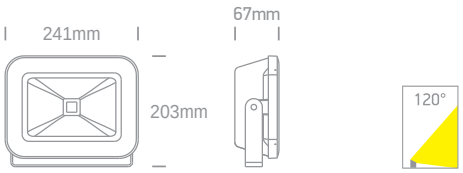



7028C | 50W | COB LED | Die cast


IP65 | 70 CRI | ADJUSTABLE | CE

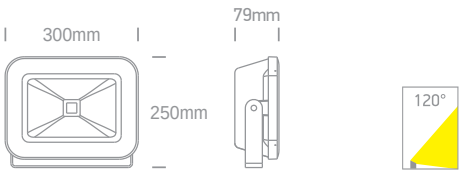



7028E | 100W | COB LED | Die cast

IP65 | 70 CRI | ADJUSTABLE | CE

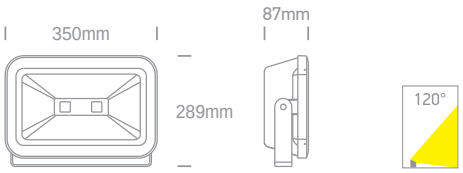

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028A/AN/C	Anthracite	Cool white	4000K	10W	700lm	120°	100-240V		100cm	20	Complete with driver
7028AB/AN/C	Anthracite	Cool white	4000K	20W	1400lm	120°	100-240V		100cm	12	Complete with driver
7028B/AN/D	Anthracite	Daylight	6000K	30W	2200lm	120°	100-240V		100cm	10	Complete with driver
7028B/AN/C	Anthracite	Cool white	4000K	30W	2100lm	120°	100-240V		100cm	10	Complete with driver
7028C/AN/D	Anthracite	Daylight	6500K	50W	3700lm	120°	100-240V		100cm	6	Complete with driver
7028C/AN/C	Anthracite	Cool white	4000K	50W	3500lm	120°	100-240V		100cm	6	Complete with driver
7028C/AN/W	Anthracite	Warm white	3000K	50W	3300lm	120°	100-240V		100cm	6	Complete with driver
7028E/AN/C	Anthracite	Cool white	4000K	2x50W	7000lm	120°	100-240V		100cm	3	Complete with driver

The LED Retro Floodlight

Die cast



7062A/AN/C



7062A | 10W | SMD 3030 | Die cast

IP65


80 CRI

ADJUSTABLE

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7062A/AN/C	Anthracite	Cool white	4000K	10W	900lm	120°	230V		100cm	25	Complete with driver

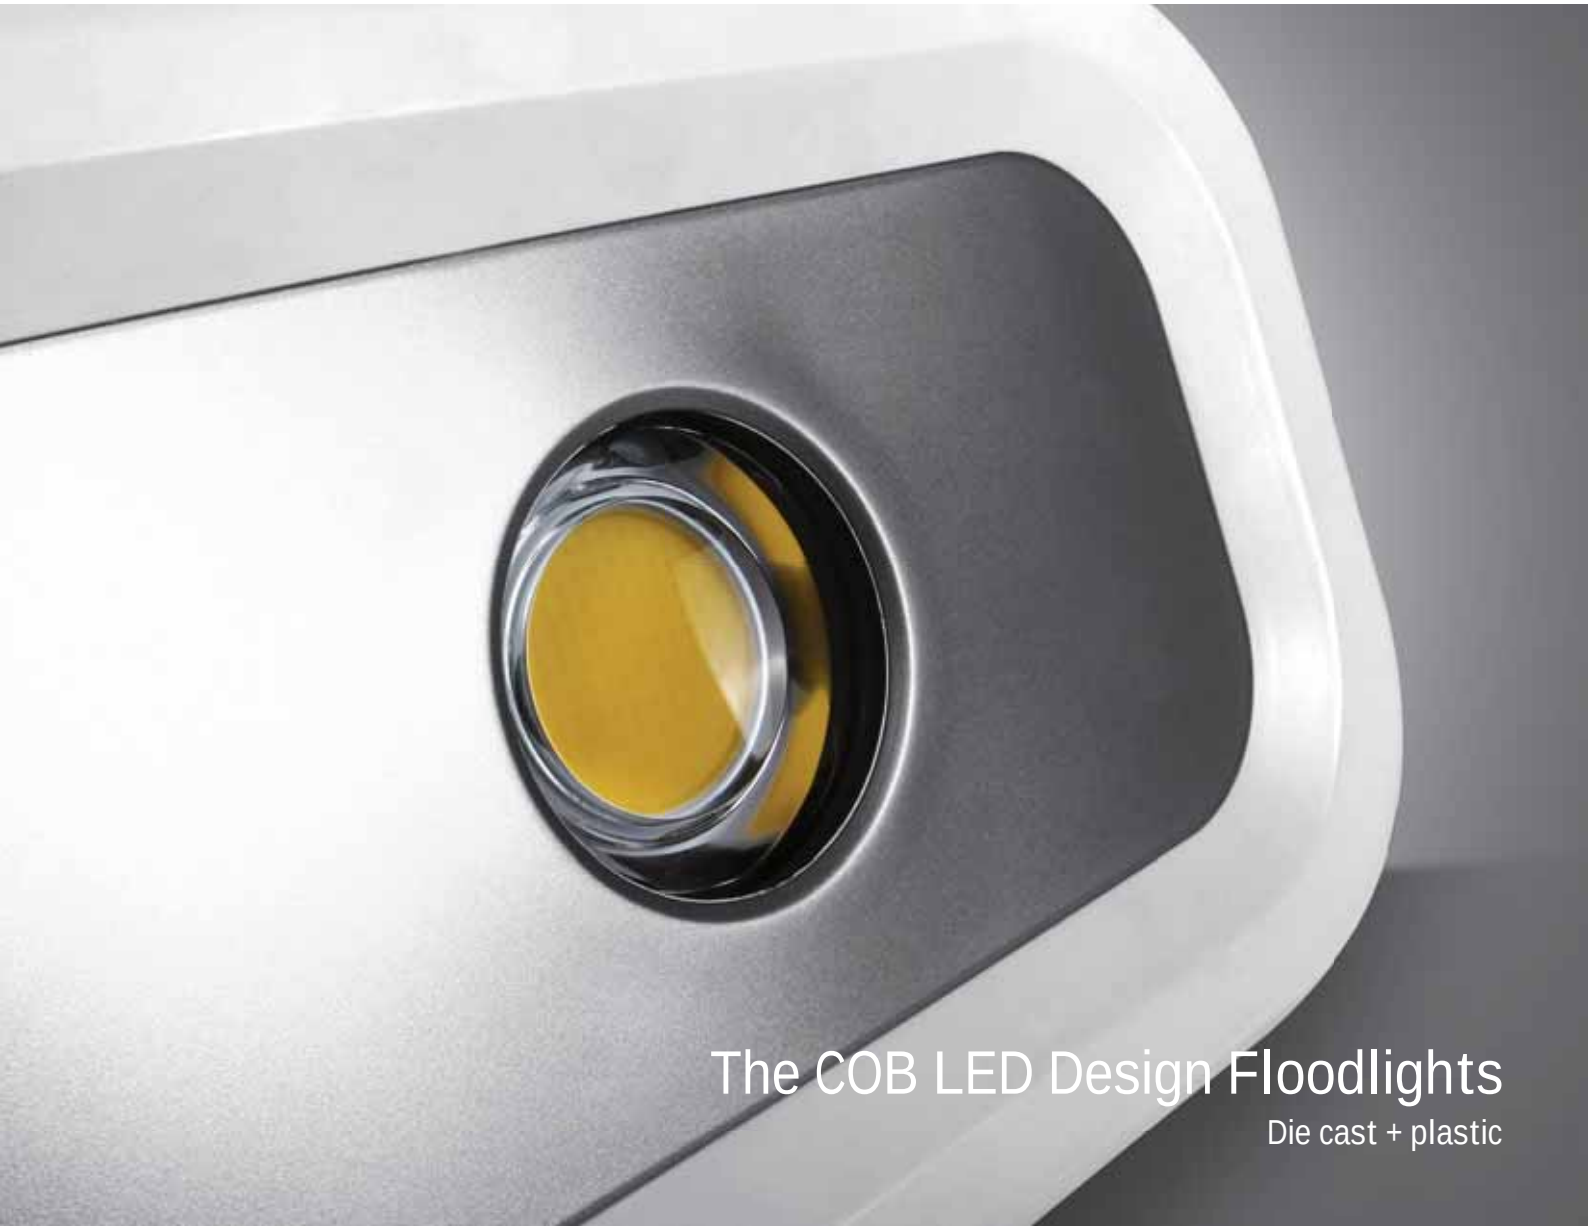

The COB LED Design Floodlights


Die cast + plastic



7064 | 10W | COB LED | Die cast + plastic

IP65
70 CRI
ADJUSTABLE
CE



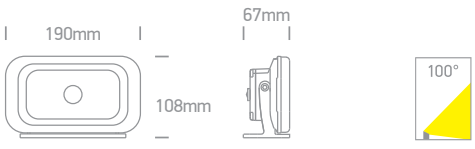




7066 | 30W | COB LED | Die cast + plastic

IP65
70 CRI
ADJUSTABLE
CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7064/W/C	White	Cool white	4000K	10W	1135lm	100°	100-240V	⏚	100cm	8	Complete with driver
7066/W/C	White	Cool white	4000K	30W	3030lm	100°	100-240V	⏚	100cm	4	Complete with driver




The AC LED Floodlights


7028AG/W/C

7028AG | 10W | SMD 3030 | Die cast + tempered glass

IP65 | 80 CRI | ADJUSTABLE | CE


7028AG/B/C

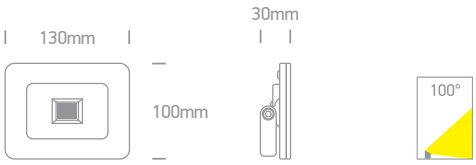



7028BG/W/C

7028BG | 30W | SMD 3030 | Die cast + tempered glass

IP65 | 80 CRI | ADJUSTABLE | CE


7028BG/B/C

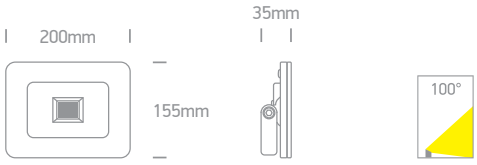



7028CG/W/C

7028CG | 50W | SMD 3030 | Die cast + tempered glass

IP65 | 80 CRI | ADJUSTABLE | CE


7028CG/B/C

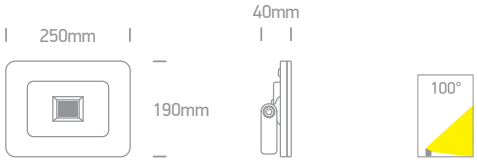



7028BGE/W/C

7028BGE | 30W | SMD 3030 | Sensor | Die cast + tempered glass

IP65 | 80 CRI | ADJUSTABLE | CE


7028BGE/B/C

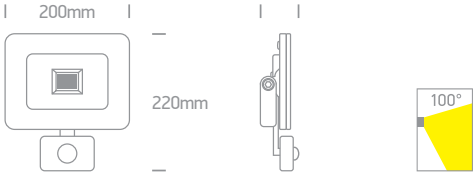

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028AG/W/C	White	Cool white	4000K	10W	800lm	100°	230V		50cm	20	AC LED
7028AG/B/C	Black	Cool white	4000K	10W	800lm	100°	230V		50cm	20	AC LED
7028BG/W/C	White	Cool white	4000K	30W	2400lm	100°	230V		50cm	12	AC LED
7028BG/B/C	Black	Cool white	4000K	30W	2400lm	100°	230V		50cm	12	AC LED
7028CG/W/C	White	Cool white	4000K	50W	4000lm	100°	230V		50cm	8	AC LED
7028CG/B/C	Black	Cool white	4000K	50W	4000lm	100°	230V		50cm	8	AC LED
7028BGE/W/C	White	Cool white	4000K	30W	2400lm	100°	230V		50cm	12	AC LED
7028BGE/B/C	Black	Cool white	4000K	30W	2400lm	100°	230V		50cm	12	AC LED



The COB LED Project Floodlights

Die cast




7050A | 10W | COB LED | Die cast

IP65 | 70 CRI | ADJUSTABLE | CE



Can also be suspended.








7050B | 30W | COB LED | Die cast

IP65 | 70 CRI | ADJUSTABLE | CE



Can also be suspended.








7050C | 50W | COB LED | Die cast

IP65 | 70 CRI | ADJUSTABLE | CE



Can also be suspended.





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7050A/G/C	Grey	Cool white	4000K	10W	850lm	80°	100-240V		100cm	6	Complete with driver
7050B/G/C	Grey	Cool white	4000K	30W	2660lm	80°	100-240V		100cm	4	Complete with driver
7050C/G/C	Grey	Cool white	4000K	50W	4390lm	80°	100-240V		100cm	2	Complete with driver



The LED High Power Boxes
Aluminium




7058 | 120W | SMD 3030 | Surface mounted | Aluminium

Ideal for petrol stations, showrooms & warehouses.

IP65 70 CRI

CE



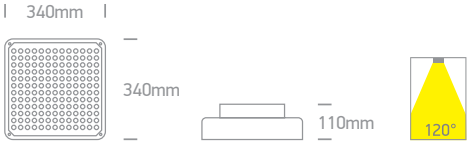



7058R | 120W | SMD 3030 | Recessed mounted | Aluminium

Ideal for petrol stations, showrooms & warehouses.

IP65 70 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
7058/W/D	White	Daylight	6000K	120W	10800lm	120°	100-240V		-	-	1	Complete with driver
7058/W/C	White	Cool white	4000K	120W	10200lm	120°	100-240V		-	-	1	Complete with driver
7058R/W/D	White	Daylight	6000K	120W	10800lm	120°	100-240V		380x380mm	130mm	1	Complete with driver
7058R/W/C	White	Cool white	4000K	120W	10200lm	120°	100-240V		380x380mm	130mm	1	Complete with driver




The LED Wall Washers

Aluminium



7054A | 12x1W | LED | Aluminium — Connect maximum 10pcs.


IP65 | 70 CRI | ADJUSTABLE | CE





7054B | 24x1W | LED | Aluminium — Connect maximum 5pcs.

IP65 | 70 CRI | ADJUSTABLE | CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7054A/W	Grey	Warm white	3000K	12x1W	700lm	60°x20°	24V DC	III	100cm	20	Requires 24V DC driver
7054B/W	Grey	Warm white	3000K	24x1W	1400lm	60°x20°	24V DC	III	100cm	12	Requires 24V DC driver



70100/AN/C



70101/AN/C

The COB LED Street Light

20-50W




70080 | 20W | COB LED | Die cast

IP65 70 CRI

CE



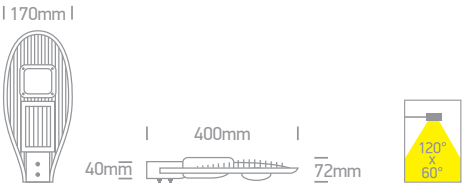




70090 | 30W | COB LED | Die cast

IP65 70 CRI

CE



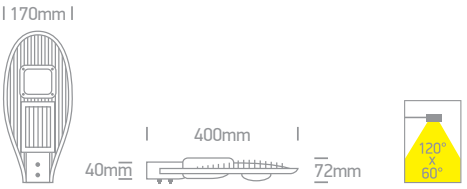




70100 | 50W | COB LED | Die cast

IP65 70 CRI

CE



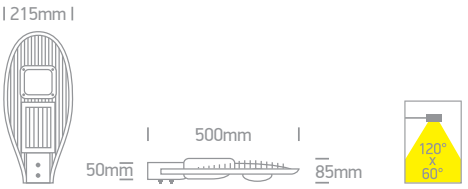

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
70080/AN/C	Anthracite	Cool white	4000K	20W	1500lm	120°x60°	230V		60cm	2	Complete with driver
70090/AN/C	Anthracite	Cool white	4000K	30W	2250lm	120°x60°	230V		60cm	2	Complete with driver
70100/AN/C	Anthracite	Cool white	4000K	50W	3750lm	120°x60°	230V		60cm	2	Complete with driver



The COB LED Street Light

80-120W




70101 | 80W | COB LED | Die cast

IP65 70 CRI

CE



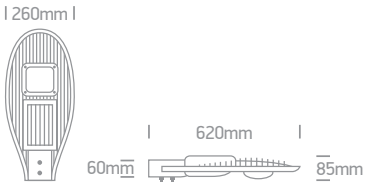




70102 | 120W | COB LED | Die cast

IP65 70 CRI

CE



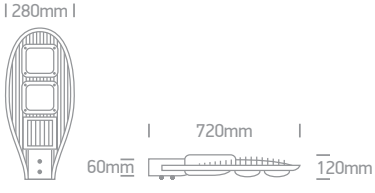

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
70101/AN/C	Anthracite	Cool white	4000K	80W	6000lm	120°x60°	100-240V		60cm	1	Complete with driver
70102/AN/C	Anthracite	Cool white	4000K	2x60W	9000lm	120°x60°	100-240V		60cm	1	Complete with driver







70108 | 60W | LED | Die cast

IP66 70 CRI

CE










70104 | 30W | COB LED | Die cast

IP65 70 CRI

CE








70105 | 50W | COB LED | Die cast


IP65 70 CRI

CE





Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
70108/AN/C	Anthracite	Cool white	4000K	60W	5300lm	Assymetric	100-240V		100cm	1	Complete with driver
70104/G/C	Grey	Cool white	4000K	30W	2700lm	120°	100-240V		500cm	1	Complete with driver
70105/AN/C	Anthracite	Cool white	4000K	50W	4000lm	60°	100-240V		500cm	1	Complete with driver

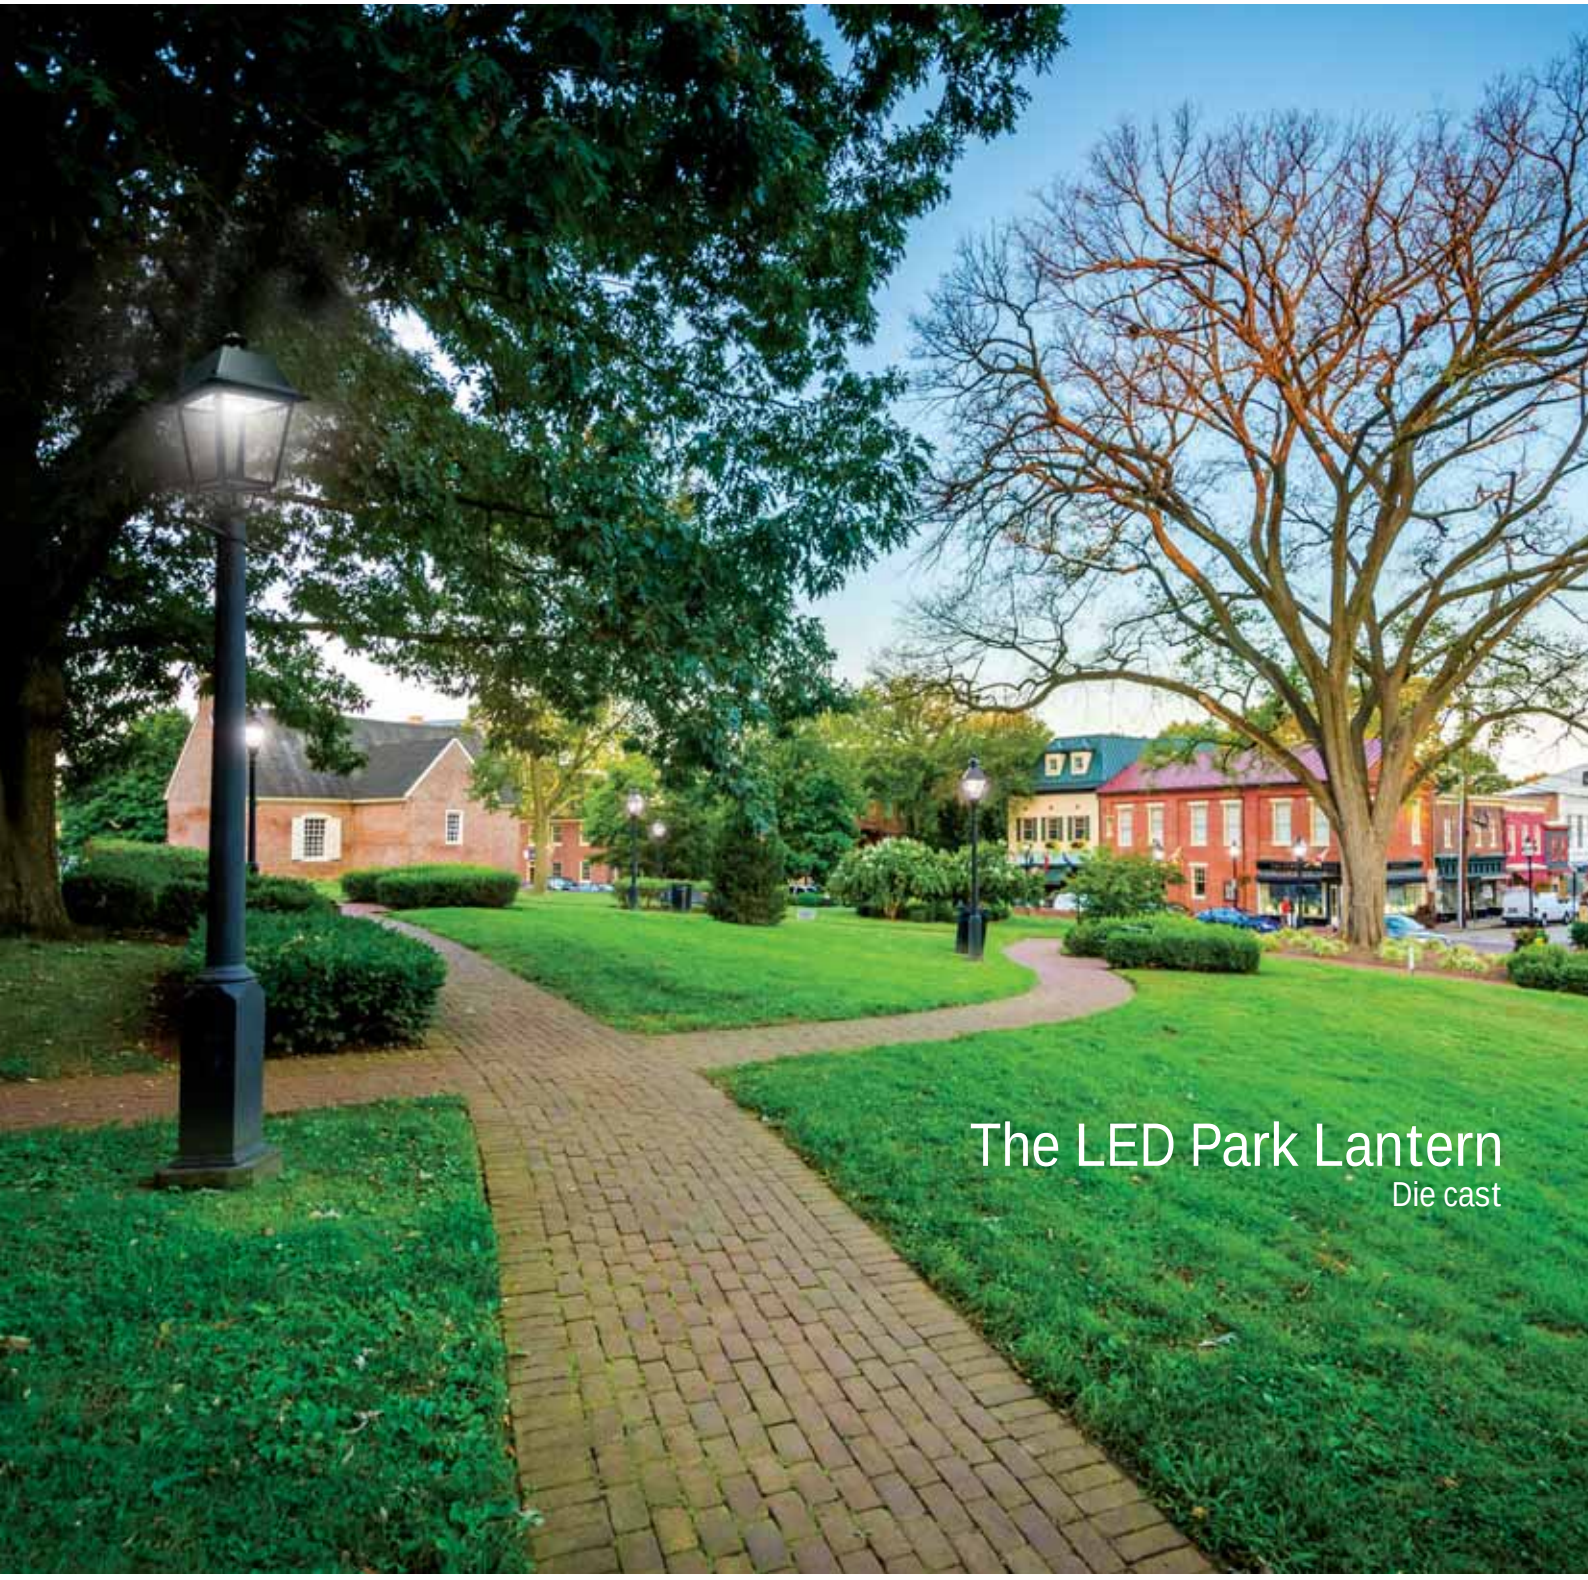

The LED Park Lantern

Die cast





70110 | 60W | LED | Die cast

IP66 70 CRI

CE







Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
70110/AN/C	Anthracite	Cool white	4000K	60W	4500lm	Assymetric	100-240V		100cm	1	Complete with driver





22

Emergency Lights

Pages 513-518

LED | Emergency 3Hrs Maintained | Recessed

PC | Plastic + aluminium

IP20 IP22 IP44 IP65

80 CRI



one



LED Recessed & Plafo



89002 | 3W | LED | Emergency 3Hrs Maintained | Recessed | Plastic + aluminium

IP20

CE






67366E | 12W | SMD 2835 | Emergency 3Hrs Maintained | PC

IP54 80 CRI

CE








67284LE | 25W | SMD 2835 | Emergency 3Hrs Maintained | PC

IP65 80 CRI

CE






67280ANE | 15W | SMD 2835 | Emergency 3Hrs Maintained | Plastic

IP65 80 CRI

CE






67282ANE | 16W | SMD 2835 | Emergency 3Hrs Maintained | Plastic

IP65 80 CRI

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Battery Duration				Notes
89002	White	Daylight	6000K	3W	150lm	230V		3Hrs	72mm	120mm	12	Supplied with battery
67366E/W/C	White	Cool white	4000K	12W	960lm	230V		3Hrs	-	-	20	Supplied with battery
67366E/W/W	White	Warm white	3000K	12W	900lm	230V		3Hrs	-	-	20	Supplied with battery
67284LE/W/C	White	Cool white	4000K	25W	1900lm	230V		3Hrs	-	-	12	Supplied with battery
67284LE/W/W	White	Warm white	3000K	25W	1900lm	230V		3Hrs	-	-	12	Supplied with battery
67280ANE/G/W	Grey	Warm white	3000K	15W	1000lm	230V		3Hrs	-	-	10	Supplied with battery
67282ANE/G/W	Grey	Warm white	3000K	16W	1280lm	230V		3Hrs	-	-	10	Supplied with battery



LED Ceiling Plexiglass Signs




89400 | 1,2W | LED | Emergency 3Hrs Maintained

Supplied with 3 stickers.

IP41

CE






89406 | 1W | LED | Emergency 3Hrs Maintained

Supplied with 3 stickers.

IP44

CE






89406R | 1W | LED | Emergency 3Hrs Maintained | Recessed

Supplied with 3 stickers.

IP44

CE



Order Code	Colour	Watts	Input	Class	Battery Type	Battery Duration				Notes
89400/AL	Aluminium	1,2W	230V	⏚	Ni-Cd 3,6V 1,5Ah	3Hrs	-	-	18	-
89406/W	White	1W	230V	▢	Ni-Cd 3,6V 1,5Ah	3Hrs	-	-	12	Ceiling/Wall mounted
89406R/W	White	1W	230V	▢	Ni-Cd 3,6V 1,5Ah	3Hrs	300x45mm	120mm	16	-



LED Wall & Ceiling




89404 | 7W | LED | Emergency 3Hrs Maintained | PC

Supplied with 3 stickers.

IP65

CE







89402 | 1,2W | LED | Emergency 3Hrs Maintained

Supplied with 3 stickers.

IP22

CE



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class	Battery Type	Battery Duration		Notes
89404	White	Daylight	6000K	7W	230V	⏚	Ni-Cd 3,6V 1,5Ah	3Hrs	12	Supplied with battery
89402/W	White	-	-	1,2W	230V	▣	-	3Hrs	30	Supplied with battery



Universal LED Emergency Kit




89005/EME | 5-50W | Emergency kit for LED Downlights and LED strips | Emergency 3Hrs Maintained

IP20

CE



WIRING DIAGRAM

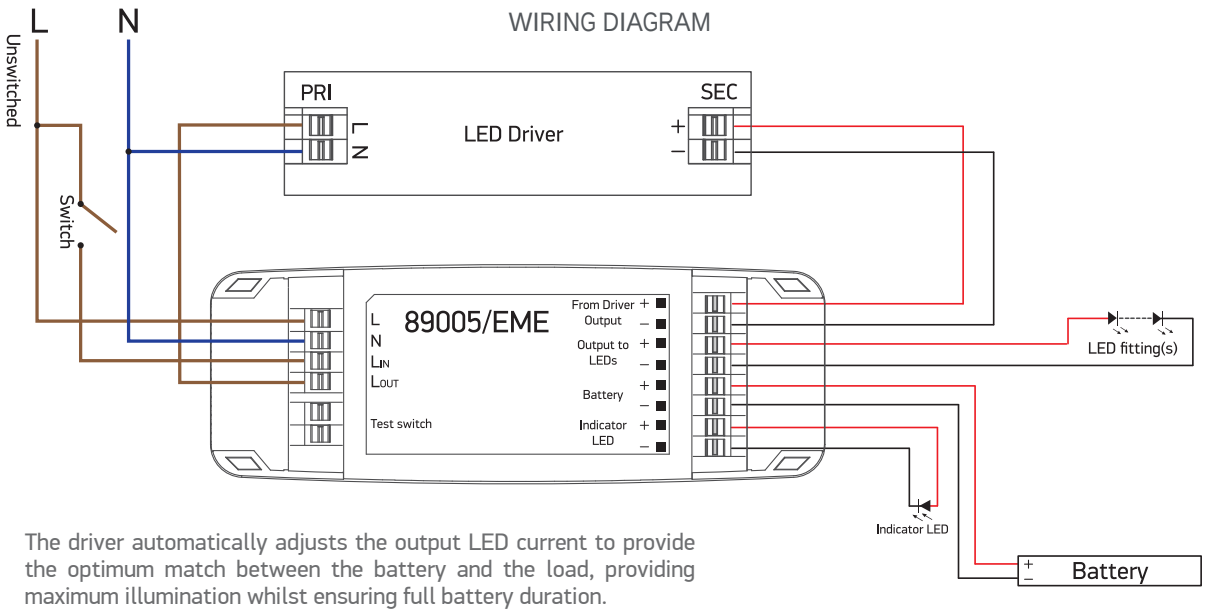

The driver automatically adjusts the output LED current to provide the optimum match between the battery and the load, providing maximum illumination whilst ensuring full battery duration.

Emergency mode light output compared with normal operation:

Luminaire Power	5W	7W	10W	12W	15W	20W	25W	30W	35W	40W	45W	50W
	60%	43%	30%	25%	20%	15%	12%	10%	9%	8%	7%	6%

Order Code	Input	Watts	Class	Battery Type	Charge Period	Battery Duration		Notes
89005/EME	230V	5-50W		Ni-Mh 3,6V 4,0Ah	24Hrs	3Hrs	24	Supplied with battery



GU10 LED Emergency Kit




89009/EME | 3,5-8W | Emergency kit for GU10 LED | Emergency 3Hrs Maintained


IP20

CE



WIRING DIAGRAM

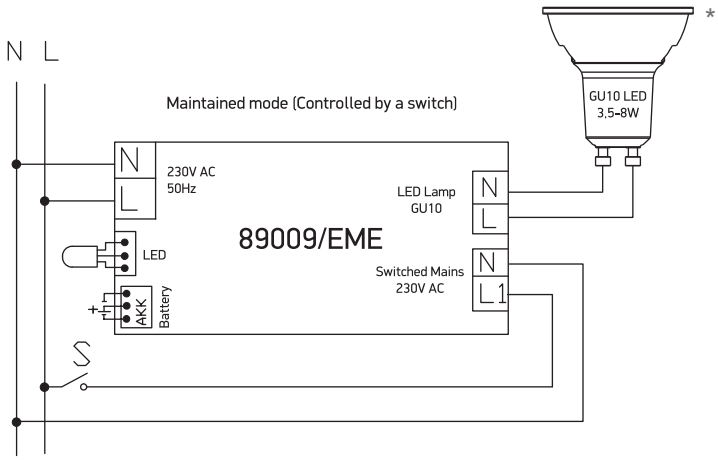

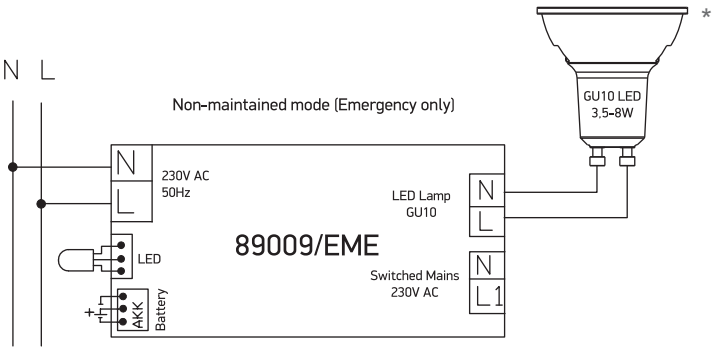

* This kit will only operate with GU10 LED lamps suitable for 180V DC power supply.

Order Code	Input	Watts	Class	Battery Type	Charge Period	Battery Duration		Notes
89009/EME	230V	3,5-8W	⧈	Ni-Cd 7,2V 4,0Ah	Max. 24Hrs	3Hrs	24	Supplied with battery




LED Panels Emergency Kit




89143F | 40-48W | Emergency pack for 40-48W LED Panel | Emergency 3Hrs Maintained

IP20

CE



WIRING DIAGRAM

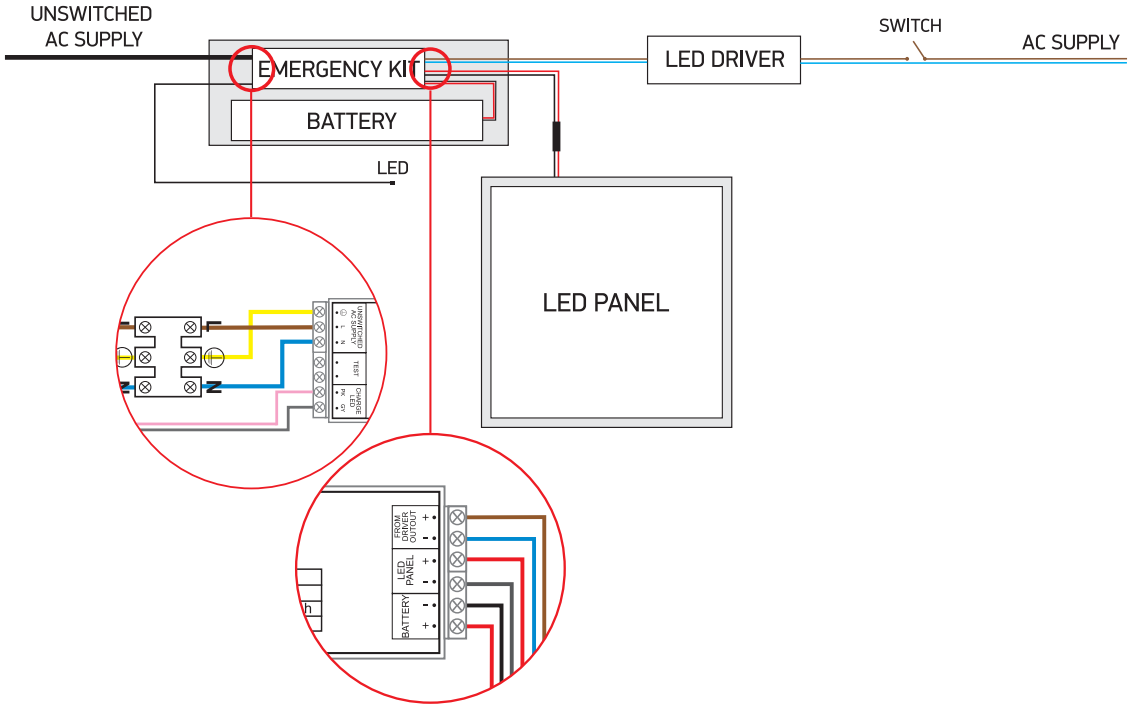

Order Code	Input	Watts	Class	Battery Type	Charge Period	Battery Duration		Notes
89143F	230V	40-48W		Ni-Cd 12V 4,5Ah	24Hrs	3Hrs	6	Supplied with battery





23

Trafo & Ballast

Pages 521-524

HQI | T5 | T8 | PL | Ballast | Transformers











12V AC Transformers



89106E | 10-60W

TRIAC
DIMMABLE

CE





89110E | 35-105W

TRIAC
DIMMABLE

CE



Order Code	Input	Power	Output	Class	Dimmable		Notes
89106E	230V	10-60W	12V AC	⧈	YES	200	Dimmer leading & trailing edge
89110E	230V	35-105W	12V AC	⧈	YES	100	Dimmer leading & trailing edge



HQI Ballasts



89020A | 20W | HQI ballast

Suitable for:
HCI-TC G8,5
HCI-TF G6,5
CMH-MR16 GX10
CMH20 GU6,5
CMH SuperMini GU6,5
CMH20 PAR20 E27
CMH20 PAR30 E27





89020B | 20W | HQI ballast

Suitable for:
CDM-Tm PGJ5
ACT-T GX10 (8002X)






89020 | 20W | HQI ballast

QUICK FIX

Suitable for:
CMH-MR16 GX10
CMH SuperMini GU6,5
CMH-TC G8,5





89070 | 70W | HQI ballast

QUICK FIX

Suitable for:
CDM-T G12
CDM-TD RX7S
CDM-TC G8,5
CDM-TP PG12-2(70W)
CDM-R E27
CDM-R111 GX8,5
HQI-T G12
HQI-TS RX7S
HCI-T G12
HCI-TS RX7S
HCI-TC G8,5
HCI-PAR E27
CMH-T G12
CMH-TC G8,5
CMI-T GX10





89150 | 150W | HQI ballast

QUICK FIX

Suitable for:
CDM-T G12
CDM-TD RX7S
CDM-TP PG12-2(150W)
HQI-T G12
HQI-TS RX7S-24
HCI-T G12
HCI-TS RX7S-24
HQI-E E27
CMH-T G12
CMH-TT E40



Order Code	Input	Power	Class	Dimmable		Notes
89020A/ELE	230V	20W		NO	72	-
89020B/ELE	230V	20W		NO	100	-
89020/ELE	230V	20W		NO	25	-
89070/ELE	230V	70W		NO	25	-
89150/ELE	230V	150W		NO	24	-



89113/ELE

89242/ELE

PL Ballasts



89113 / 89142 | PL ballast | 1 lamp

QUICK FIX

CE

154mm

67mm

30mm



89213 | PL ballast | 2 lamps

QUICK FIX

CE

154mm

67mm

30mm



89242 | PL ballast | 2 lamps

QUICK FIX

CE

170mm

77mm

30mm



89142 / 89242 | PL dimmable ballast | 1-10V dimmer control

1-10V

DIMMABLE

QUICK FIX

CE

179mm

79mm

31mm

Order Code	Input	Power	Class	Dimmable		Notes
89113/ELE	230V	1x13W		NO	30	-
89142/ELE	230V	1x26W/1x32W/1x42W		NO	30	-
89213/ELE	230V	2x13W		NO	30	-
89242/ELE	230V	2x26W/2x32W/2x42W		NO	25	-
89142/ELE/DIM	230V	1x26W/1x32W/1x42W		YES	32	Use 1-10V dimmer
89242/ELE/DIM	230V	2x26W/2x32W/2x42W		YES	30	Use 1-10V dimmer



89103

T5 - T8 - PL Dimmable Ballast



89103 | 1-10V dimmer control | 1 lamp



Suitable for:
T5-HO 54W
T8 58W
2G11 55W



Order Code	Input	Power	Class	Dimmable		Notes
89103	230V	See list above	⏚	YES	36	Use 1-10V dimmer





24

LED Drivers

Pages 527-538

Constant voltage | Constant current

IP20

TRIAC DIMMABLE · 1-10V DIMMABLE · DALI DIMMABLE · PUSH TO DIM · QUICK FIX · DALI · CE





89020

89015

The 350mA Range

Constant current



89004 | 1-4W | 350mA

IP66 QUICK FIX

CE






89006 | 1-6W | 350mA

IP20 QUICK FIX

CE





89008 | 4-8W | 350mA

IP20 QUICK FIX

CE





89015 | 10-15W | 350mA

IP20 QUICK FIX

CE






89020 | 11-20W | 350mA

IP20 QUICK FIX

CE



Order Code	Input	Power	Output	Class	Dimmable		Notes
89004	100-240V	1-4W	350mA	☐	NO	400	-
89006	230V	1-6W	350mA	☐	NO	200	-
89008	230V	4-8W	350mA	☐	NO	200	-
89015	230V	10-15W	350mA	☐	NO	200	-
89020	230V	11-20W	350mA	☐	NO	200	-




The 350mA Dimmable Range

Constant current



89011D | 1-11W | 350mA | 1-10V | Dimmable

IP20 | 1-10V DIMMABLE | CE





89012D | 15W | 350mA | 1-10V | Dimmable


IP20 | 1-10V DIMMABLE | QUICK FIX | CE





89015T | 7,5-15W | 350mA | TRIAC | Dimmable


IP20 | TRIAC DIMMABLE | QUICK FIX | CE





89076D | 4 channels 10-19W each | 350mA | 1-10V | Dimmable

IP20 | 1-10V DIMMABLE | CE



Order Code	Input	Power	Output	Class	Dimmable		Notes
89011D	230V	1-11W	350mA	⧈	YES	64	Use 1-10V dimmer
89012D	100-240V	15W	350mA	⏚	YES	48	Use 1-10V dimmer
89015T	230V	7,5-15W	350mA	⧈	YES	200	Use TRIAC dimmer
89076D	100-240V	4x10-19W	350mA	⧈	YES	16	Use 1-10V dimmer

The 500mA Range


Constant current



89004C | 1,5-4W | 500mA

IP66 QUICK FIX

CE





89030C | 3-28W | 500mA

IP20 QUICK FIX

CE



The 700mA Range


Constant current



89004A | 2-4W | 700mA

IP66 QUICK FIX

CE






89006A | 1-6W | 700mA

IP20 QUICK FIX

CE





89015A | 7-15W | 700mA

IP20 QUICK FIX

CE






89030A | 15-30W | 700mA

IP20 QUICK FIX

CE



Order Code	Input	Power	Output	Class	Dimmable		Notes
89004C	100-240V	1,5-4W	500mA	☐	NO	400	-
89030C	100-240V	3-28W	500mA	☐	NO	100	-
89004A	100-240V	2-4W	700mA	☐	NO	400	-
89006A	230V	1-6W	700mA	☐	NO	200	-
89015A	230V	7-15W	700mA	☐	NO	200	-
89030A	230V	15-30W	700mA	☐	NO	100	-



The 700mA Dimmable Range


Constant current



89015AT | 7-15W | 700mA | TRIAC | Dimmable

IP20 TRIAC DIMMABLE QUICK FIX

CE





Order Code	Input	Power	Output	Class	Dimmable		Notes
89015AT	230V	7-15W	700mA	⧈	YES	200	Use TRIAC dimmer



The 12V DC Range


Constant voltage



89008W | 8W | 12V DC

IP20

CE





89015W | 15W | 12V DC

IP20

CE






89030W | 30W | 12V DC

IP20

CE






89075W | 75W | 12V DC

IP20

CE






89200WN | 200W | 12V DC

IP20

CE



Order Code	Input	Power	Output	Class	Dimmable		Notes
89008W	230V	8W	12V DC	⧈	NO	200	-
89015W	230V	15W	12V DC	⧈	NO	200	-
89030W	230V	30W	12V DC	⧈	NO	100	-
89075W	230V	75W	12V DC	⧈	NO	50	-
89200WN	230V	200W	12V DC	⏚	NO	48	-

The 24V DC Range

Constant voltage



89015V | 15W | 24V DC

IP20

CE





89030V | 30W | 24V DC

IP20

CE






89050V | 50W | 24V DC

IP20

CE





89075V | 75W | 24V DC

IP20

CE





89100V | 100W | 24V DC

IP20

CE





89150V | 150W | 24V DC

IP20

CE



Order Code	Input	Power	Output	Class	Dimmable		Notes
89015V	230V	15W	24V DC	☐	NO	200	-
89030V	230V	30W	24V DC	☐	NO	100	-
89050V	230V	50W	24V DC	☐	NO	100	-
89075V	230V	75W	24V DC	☐	NO	50	-
89100V	230V	100W	24V DC	☐	NO	20	-
89150V	230V	150W	24V DC	☐	NO	25	-

The 24V DC Slim Range

Constant voltage



89030VL

89075VL




89030VL | 30W | 24V DC

Suitable for LED profiles on page 218, 220, 221

IP20

CE






89060VL | 60W | 24V DC

Suitable for LED profiles on page 218, 220, 221

IP20

CE





89075VL | 75W | 24V DC

Suitable for LED profiles on page 218, 220, 221

IP20

CE






89100VL | 100W | 24V DC

Suitable for LED profiles on page 218, 220, 221

IP20

CE






89150VL | 150W | 24V DC

Suitable for LED profiles on page 218, 220, 221

IP20

CE



Order Code	Input	Power	Output	Class	Dimmable		Notes
89030VL	230V	30W	24V DC	☐	NO	100	-
89060VL	230V	60W	24V DC	☐	NO	50	-
89075VL	230V	75W	24V DC	☐	NO	50	-
89100VL	230V	100W	24V DC	☐	NO	50	-
89150VL	230V	150W	24V DC	☐	NO	25	-



The 24V DC Open Range


Constant voltage



89060VN | 60W | 24V DC

IP20

CE






89100VN | 100W | 24V DC

IP20

CE






89150VN | 150W | 24V DC

IP20

CE






89200VN | 200W | 24V DC

IP20

CE






89350VN | 350W | 24V DC

IP20

CE



Order Code	Input	Power	Output	Class	Dimmable		Notes
89060VN	100-240V	60W	24V DC	⏚	NO	120	-
89100VN	100-240V	100W	24V DC	⏚	NO	63	-
89150VN	100-240V	150W	24V DC	⏚	NO	48	-
89200VN	230V	200W	24V DC	⏚	NO	48	-
89350VN	230V	350W	24V DC	⏚	NO	36	-


The 12V DC Dimmable Range

Constant voltage



89030WD | 30W | 12V DC | 1-10V | Dimmable


IP20 | 1-10V DIMMABLE | CE





89060WD | 3 Channels 20W each | 12V DC | 1-10V | Dimmable

IP20 | 1-10V DIMMABLE | CE



The 24V DC Dimmable Range

Constant voltage



89030VD | 30W | 24V DC | Push to DIM & 1-10V | Dimmable


IP20 | PUSH TO DIM | 1-10V DIMMABLE | CE





89075VD | 75W | 24V DC | Push to DIM & 1-10V | Dimmable


IP20 | PUSH TO DIM | 1-10V DIMMABLE | CE





89100VNT | 100W | 24V DC | TRIAC | Dimmable

IP20 | TRIAC DIMMABLE | CE



Order Code	Input	Power	Output	Class	Dimmable		Notes
89030WD	120-240V	30W	12V DC		YES	34	Use 1-10V dimmer
89060WD	230V	3x20W	12V DC		YES	18	Use 1-10V dimmer
89030VD	230V	30W	24V DC		YES	20	Push to DIM & 1-10V
89075VD	230V	75W	24V DC		YES	20	Push to DIM & 1-10V
89100VNT	230V	100W	24V DC		YES	20	Use TRIAC dimmer



The Universal Push to DIM & 1-10V Dimmable Range



89027D | Push to DIM & 1-10V | Dimmable


Adjustable output using DIP switches.

IP20 PUSH TO DIM 1-10V DIMMABLE

CE

LED Current Selection

900mA ● ● ●
700mA ● ● ○
500mA ● ○ ○
350mA ○ ○ ○
1 2 3



Output Current	350mA	500mA	700mA	900mA
Output Power	2-15W	3-20W	4-27W	6-24W



89030D | Push to DIM & 1-10V | Dimmable

Adjustable output using DIP switches.

IP20 PUSH TO DIM 1-10V DIMMABLE

CE

LED Current Selection and Voltage Selection

	1	2	3	4	5
24V	●	●	●	●	●
12V	●	●	●	●	●
700mA	●	●	●	○	○
600mA	○	●	●	○	○
550mA	●	○	●	○	○
500mA	●	●	○	○	○
450mA	○	○	●	○	○
400mA	○	●	○	○	○
350mA	●	○	○	○	○
250mA	○	○	○	○	○



Output Current / Voltage	250mA	350mA	400mA	450mA	500mA	550mA	600mA	700mA	12V DC	24V DC
Output Power	1,5-15W	2-20W	2,5-22W	2,7-24W	3-27W	3,3-29W	3,6-30W	4,2-30W	8W	16W



89050D | Push to DIM & 1-10V | Dimmable

Adjustable output using DIP switches.

IP20 PUSH TO DIM 1-10V DIMMABLE

CE

LED Current Selection

	1	2	3	4	5
1050mA	●	●	●	●	●
900mA	●	●	○	●	●
800mA	●	●	○	○	●
700mA	○	○	●	●	●
650mA	○	●	●	○	○
600mA	○	○	●	●	●
550mA	●	○	○	○	○
500mA	○	●	○	○	○
350mA	○	○	○	○	○



Output Current	350mA	500mA	550mA	600mA	650mA	700mA	800mA	900mA	1050mA
Output Power	4-25W	5-36W	6-40W	6-43W	7-47W	7-50W	8-50W	9-50W	11-50W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89027D	230V	Refer to table	Adjustable	⧈	YES	50	Push to DIM & 1-10V
89030D	230V	Refer to table	Adjustable	⏚	YES	40	Push to DIM & 1-10V
89050D	230V	Refer to table	Adjustable	⧈	YES	20	Push to DIM & 1-10V



The DALI Universal Dimmable Range




89020L | DALI & Push to DIM | Dimmable

Adjustable output using DIP switches.

IP20 · PUSH TO DIM · DALI DIMMABLE · CE · DALI

LED Current Selection and Voltage Selection





Output Current / Voltage	350mA	500mA	700mA	900mA	12V DC	24V DC
Output Power (Max.)	3,2-15W	4,5-20W	6,3-20W	8,1-20W	10W	20W





89045L | DALI, Push to DIM, 1-10V | Dimmable

Adjustable output using DIP switches.

IP20 · PUSH TO DIM · DALI DIMMABLE · 1-10V DIMMABLE · CE · DALI

LED Current Selection





Output Current	350mA	400mA	450mA	500mA	550mA	600mA	650mA	700mA	750mA	800mA	850mA	900mA	950mA	1000mA	1050mA	1100mA
Output Power	4-20W	5-23W	6-26W	6-29W	7-32W	7-35W	8-38W	9-40W	9-42W	10-45W	10-45W	10-45W	11-45W	12-45W	13-45W	13-45W




89050L | DALI, Push to DIM, 1-10V | Dimmable

Adjustable output using DIP switches.

IP20 · PUSH TO DIM · DALI DIMMABLE · 1-10V DIMMABLE · CE · DALI

LED Current Selection





Output Current	700mA	750mA	800mA	850mA	900mA	950mA	1000mA	1050mA	1100mA	1150mA	1200mA	1250mA	1300mA	1350mA	1400mA
Output Power	8,4-40W	9-43,5W	9,6-46,5W	10,2-49W	10,8-50W	11,4-50W	12-50W	12,6-50W	13,2-50W	13,8-50W	14,4-50W	15-50W	15,6-50W	16,2-50W	16,8-50W

Order Code	Input	Power	Output	Class	Dimmable		Notes
89020L	230V	Refer to table	Adjustable	⧈	YES	40	DALI & Push to DIM
89045L	230V	Refer to table	Adjustable	⏚	YES	30	DALI, Push to DIM, 1-10V
89050L	230V	Refer to table	Adjustable	⏚	YES	24	DALI, Push to DIM, 1-10V



The 12V & 24V DC Waterproof Range


Constant voltage



89060WP | 60W | 12V DC

IP65

CE





89100VP | 100W | 24V DC

IP67

CE





89150VP | 150W | 24V DC

IP67

CE





89200VP | 200W | 24V DC

IP67

CE



Order Code	Input	Power	Output	Class	S	Dimmable	Box	Notes
89060WP	170-240V	60W	12V DC		-	NO	10	-
89100VP	100-240V	100W	24V DC		100cm	NO	36	-
89150VP	100-240V	150W	24V DC		100cm	NO	35	-
89200VP	100-240V	200W	24V DC		100cm	NO	32	-





25

LED Control & Dimming

Pages 541-546

DMX Controllers | RGB Controllers | Remote Controllers

IP20

DIMMABLE 0/1-10V DIMMABLE DMX DIMMABLE





Microwave Motion Sensor




22000 | 400W | Microwave motion sensor

Can be installed inside fittings.

IP20

- Can be installed inside fittings
- Adjustable sensitivity time 10%-100%
- ON TIME 5s-30mins
- Daylight sensor 2-50lux



Order Code	Input	Power	Output	Class	Dimmable		Notes
22000	230V	400W	230V	⧈	NO	200	-



12V & 24V Dimmer Controller



89010D | Dimmer controller for 12V & 24V | 180W@12V / 360W@24V | 1-10V | 1 channel

IP20 1-10V DIMMABLE

CE



12V & 24V Signal Repeaters



89100 | Data repeater 12V & 24V | 120W@12V / 240W@24V | 1 channel | PWM dimming only

IP20 DIMMABLE

CE

Repeats the signal when dimming constant voltage fittings e.g. LED strips.





89300 | Data repeater 12V & 24V | 60W@12V / 120W@24V (x3) | 3 channels | PWM dimming only

IP20 DIMMABLE

CE

Repeats the signal when dimming constant voltage fittings e.g. LED strips.



Order Code	Input	Power	Output	Class	Dimmable		Notes
89010D	12-24V DC	180W@12V / 360W@24V	15Amp	III	YES	64	Use 1-10V dimmer
89100	12-24V DC	120W@12V / 240W@24V	10Amp	III	YES	50	-
89300	12-24V DC	60W@12V / 120W@24V (x3)	5Amp (x3)	III	YES	50	-



DMX Controllers



89036A | Input 12-48V DC | 350/700mA | Dimmable | DMX constant current output | 3 channels

IP20 DMX DIMMABLE

CE

Suitable for:
RGB 350mA/700mA or
3 channels LED white.



Order Code	Input	Power	Output	Class	Dimmable		Notes
89036A/DMX	12-48V DC	1-12W@350mA / 3-36W@700mA	350mA / 700mA	III	YES	50	-



RGB Controllers




89024D | 24V DC | RGB+W controller | 31W/channel | 24V output

IP20 DIMMABLE

CE

RGB+W controller with 8 programs.
Maximum total output 124W (31Wx4).
Colour and timing can be changed by remote bell push.






89024E | 100-240V | 0/1-10V output | RGB+W controller

IP20 0/1-10V DIMMABLE

CE

RGB+W controller with 8 programs.
0/1-10V output for connecting devices controlled by 0/1-10V input.
Colour and timing can be changed by remote bell push.



Order Code	Input	Power	Output	Class	Dimmable		Notes
89024D	24V DC	4x31W	24V DC	III	YES	96	-
89024E	100-240V	-	0/1-10V	II	YES	96	-



RGB + W Intelligent Remote Control




20020 | Intelligent RGB + White remote control with touch wheel

IP20 DIMMABLE

CE

Compatible with all types of RGB & RGB + White LED.
10 pre-programmed modes with adjustable speed.
Controls up to 10 receivers.
Installation manual at:
www.1-light.eu/rgbw.pdf





20022 | 12-36V DC | Receiver for 20020/B | 4 channels x 5A

IP20 DIMMABLE

CE





89302 | 12-36V DC | Constant voltage RGB+W data repeater | 4 channels x 5A

IP20 DIMMABLE

CE






89302A | 12-36V DC | 350mA RGB+W constant current data repeater | 4 channels x 4,2-12,6W

IP20 DIMMABLE

CE



Order Code	Colour	Input	Power	Output	Class	Dimmable		Notes
20020/B	Black	Battery	-	-	III	YES	25	-
20022	-	12-36V DC	60W@12V / 120W@24V	12-36V DC	III	YES	100	-
89302	-	12-36V DC	36W@12V / 72W@24V	12-36V DC	III	YES	100	-
89302A	-	12-36V DC	4x4,2-12,6W	350mA	III	YES	100	-



Remote Controllers




20030 | 12-24V DC | Constant voltage wireless dimmer | 3 channels x 3A

IP20 DIMMABLE

CE

Remote controller for dimming any constant voltage 12V/24V LED fitting including LED strips, LED lamps, LED modules.
50 meters range, 2 memory settings, dimming by touch.

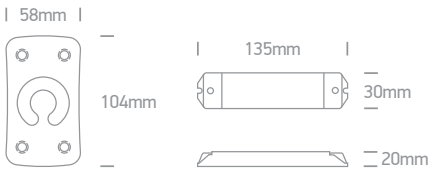




20032 | 12-24V DC | Variable colour temperature controller & dimmer | 2 channels x 3A

IP20 DIMMABLE

CE

Remote controller for changing colour temperature from daylight to warm white. Suitable for use with LED strips 7830/DW.
50 meters range, includes dimmer control and programme mode.

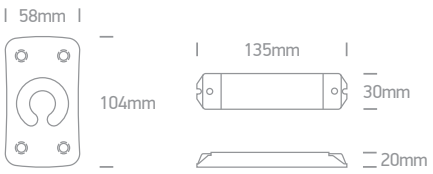




20034 | 12-24V DC | RGB wireless controller & dimmer | 3 channels x 3A

IP20 DIMMABLE

CE

Remote controller for changing colours (RGB). Suitable for use with LED strips 7830/RGB.
50 meters range, includes dimmer control and programme modes.

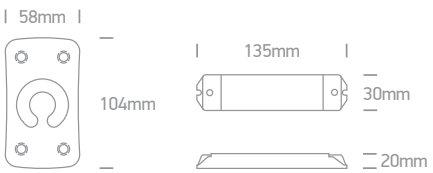

Order Code	Colour	Input	Power	Output	Class	Dimmable		Notes
20030	White	12-24V DC	36W/ch@12V 72W/ch@24V	12-24V DC	III	YES	50	-
20032	White	12-24V DC	36W/ch@12V 72W/ch@24V	12-24V DC	III	YES	50	-
20034	White	12-24V DC	36W/ch@12V 72W/ch@24V	12-24V DC	III	YES	50	-





26

Lamps


Pages 549-602

COB LED | SMD LED | MR11 | MR16 | R111 | G9 | G12 | GU5,3 | GU10
PAR38 | R7S | GX53 | E27 | E14 | B15 | B22












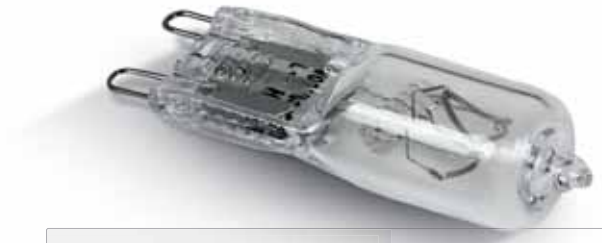

7106GPH

G9




7102G | 28W | G9 | Dimmable


HALO

DIMMABLE


CE



7102G



7104G | 42W | G9 | Dimmable



7104G




7102GFSR | 25W | G9 | Frosted | Dimmable | OSRAM

HALO

DIMMABLE

CE







7106GPH | 60W | G9 | Dimmable | PHILIPS

HALO

DIMMABLE

CE








9407G | 7W | G9

FLUO

CE






9S07G | 7W | G9

FLUO

CE



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7102G	G9	Extra warm white	2700K	28W	380lm	230V	YES	1000
7104G	G9	Extra warm white	2700K	42W	630lm	230V	YES	1000
7102GFSR	G9	Extra warm white	2700K	25W	-	240V	YES	100
7106GPH	G9	Extra warm white	2700K	60W	-	240V	YES	100
9407G/D	G9	Daylight	6000K	7W	-	230V	NO	50
9407G/W	G9	Warm white	3000K	7W	-	230V	NO	50
9S07G/D	G9	Daylight	6400K	7W	-	100-240V	NO	50

G9 LED



7103BLG/W

7105BLG/W




7103LG | 2,5W | SMD LED | G9

LED 80 CRI

CE









7103BLG | 3W | SMD LED | G9 | Frosted

LED 80 CRI

CE










7105BLG | 4W | SMD LED | G9 | Frosted

LED 80 CRI

CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7103LG/W	G9	Warm white	3000K	2,5W	190lm	230V	NO	200
7103BLG/W	G9	Warm white	3000K	3W	220lm	230V	NO	100
7105BLG/W	G9	Warm white	3000K	4W	350lm	230V	NO	100

G9 LED




7102ALG | 2W | COB LED | G9

LED 80 CRI CE









7102LG | 2W | COB LED | G9

LED 80 CRI CE










7103ALG | 4W | SMD LED | G9

LED 80 CRI CE











7106ALG | 6W | SMD LED | G9

LED 80 CRI CE









7109ALG | 9W | SMD LED | G9

LED 80 CRI CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7102ALG/W	G9	Warm white	3000K	2W	200lm	230V	NO	100
7102LG/W	G9	Warm white	3000K	2W	100lm	230V	NO	200
7103ALG/D	G9	Daylight	6000K	4W	350lm	230V	NO	100
7103ALG/C	G9	Cool white	4000K	4W	350lm	230V	NO	100
7103ALG/W	G9	Warm white	3000K	4W	350lm	230V	NO	100
7106ALG/C	G9	Cool white	4000K	6W	550lm	230V	NO	100
7106ALG/W	G9	Warm white	3000K	6W	550lm	230V	NO	100
7109ALG/C	G9	Cool white	4000K	9W	900lm	230V	NO	100
7109ALG/W	G9	Warm white	3000K	9W	900lm	230V	NO	100



G9 LED Dimmable & CCT Variable



7103ALGD | 3,5W | SMD LED | G9 | Dimmable

LED 80 CRI | TRIAC DIMMABLE | CE








7103ALGT | 3W | SMD LED | G9 | 3-Step dimming

LED 80 CRI | 3-STEP DIMMABLE | CE








7106ALGD | 5W | SMD LED | G9 | Dimmable

LED 80 CRI | TRIAC DIMMABLE | CE







7103ALG/DW | 3W | SMD LED | G9 | Variable colour temperature

LED 80 CRI | CE





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7103ALGD/W	G9	Warm white	3000K	3,5W	300lm	230V	YES	100
7103ALGT/W	G9	Warm white	3000K	3W	250lm	230V	YES	100
7106ALGD/W	G9	Warm white	3000K	5W	450lm	230V	YES	100
7103ALG/DW	G9	Warm white-Cool white-Daylight	3000K-4000K-6000K	3W	250lm	230V	NO	100

G4 & GY6,35




7103SR



7103A | 35W | G4 | Dimmable

HALO DIMMABLE CE






7103 | 35W | GY6,35 | Dimmable

7105 | 50W | GY6,35 | Dimmable

7107 | 75W | GY6,35 | Dimmable

HALO DIMMABLE CE






7103SR | 35W | GY6,35 | Dimmable | OSRAM

7105SR | 50W | GY6,35 | Dimmable | OSRAM

HALO DIMMABLE CE








7101AL | 2W | COB LED | G4 | Silicone

LED 80 CRI CE










7101L | 1,5W | SMD LED | G4

LED 80 CRI CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
7103A	G4	Extra warm white	2700K	35W	-	12V AC/DC	YES	1000
7103	GY6,35	Extra warm white	2700K	35W	-	12V AC/DC	YES	1000
7103SR	GY6,35	Extra warm white	2700K	35W	-	12V AC/DC	YES	100
7105	GY6,35	Extra warm white	2700K	50W	-	12V AC/DC	YES	1000
7105SR	GY6,35	Extra warm white	2700K	50W	-	12V AC/DC	YES	100
7107	GY6,35	Extra warm white	2700K	75W	-	12V AC/DC	YES	100
7101AL/W	G4	Warm white	3000K	2W	200lm	12V AC/DC	NO	100
7101L/W	G4	Warm white	3000K	1,5W	90lm	12V AC/DC	NO	200



MR11 GU4 & GU10




7235 | 35W | MR11 | GU4 | Dimmable

HALO

DIMMABLE

CE








7201G | 2W | COB LED | MR11 | GU10

LED 80 CRI

CE





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7235/30	GU4	Extra warm white	2700K	35W	-	30°	12V AC/DC	YES	200
7201G/D	GU10	Daylight	6000K	2W	110lm	30°	230V	NO	100
7201G/W	GU10	Warm white	3000K	2W	160lm	30°	230V	NO	100

MR16 12V




7320 | 20W | MR16 | GU5,3 | Dimmable | OSRAM

HALO

DIMMABLE

CE







7350 | 50W | MR16 | GU5,3 | Dimmable | OSRAM





7350/12 | 7350/38 | 50W | MR16 | GU5,3 | Dimmable

HALO

DIMMABLE

CE








7301 | 1,5W | LED | MR16 | GU5,3

LED

CE










7303 | 3W | LED | MR16 | GU5,3

LED

CE








7305 | 3x1W | LED | MR16 | GU5,3

LED

CE








Order Code	Lampholder	Light Colour	CCT (K)	Watts	Beam Angle	Input	Dimmable	
7320/38SR	GU5,3	Extra warm white	2700K	20W	38°	12V AC/DC	YES	100
7350/38SR	GU5,3	Extra warm white	2700K	50W	38°	12V AC/DC	YES	100
7350/12	GU5,3	Extra warm white	2700K	50W	12°	12V AC/DC	YES	200
7350/38	GU5,3	Extra warm white	2700K	50W	38°	12V AC/DC	YES	200
7301/GR	GU5,3	Green	-	1,5W	-	12V AC	NO	100
7301/R	GU5,3	Red	-	1,5W	-	12V AC	NO	100
7301/V	GU5,3	Violet	-	1,5W	-	12V AC	NO	100
7301/Y	GU5,3	Yellow	-	1,5W	-	12V AC	NO	100
7303/D/30	GU5,3	Daylight	6000K	3W	30°	12V AC/DC	NO	100
7305/RGB/30	GU5,3	RGB	-	3x1W	30°	12V AC	NO	100



MR16 LED 12V




7304A | 5W | SMD LED | MR16 | GU5,3





7306K | 7,5W | COB LED | MR16 | GU5,3 | Dimmable



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7304A/W/38	GU5,3	Warm white	3000K	5W	350lm	38°	12V AC/DC	NO	100
7306K/W	GU5,3	Warm white	3000K	7,5W	630lm	60°	12V AC/DC	YES	100

MR16 GU10 LED




7301G/W | 5W | SMD LED | MR16 | GU10

New 7301GD/W Dimmable version.

LED 90 CRI

CE









7301G/D


7301G | 1,5W | LED | MR16 | GU10

LED

CE



7301G/Y








7303G | 3W | LED | MR16 | GU10

LED

CE








7304G | 3W | LED | MR16 | GU10

LED

CE










7305G | 3x1W | LED | MR16 | GU10

New 7305G/RGB available.

LED

CE









Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7301G/W	GU10	Warm white	3000K	5W	350lm	60°	230V	NO	100
7301G/D	GU10	Daylight	6000K	1,5W	-	-	230V	NO	100
7301G/Y	GU10	Yellow	-	1,5W	-	-	230V	NO	100
7303G/D/30	GU10	Daylight	6000K	3W	-	30°	100-240V	NO	100
7304G/D/30	GU10	Daylight	6000K	3W	-	30°	100-240V	NO	100
7305G/D/15	GU10	Daylight	6000K	3x1W	190lm	15°	100-240V	NO	100
7305G/R/30	GU10	Red	-	3x1W	-	30°	100-240V	NO	100
7305G/Y/30	GU10	Yellow	-	3x1W	-	30°	100-240V	NO	100


MR16 GU10 LED




7304WG | 5W | SMD LED | MR16 | GU10

LED 80 CRI

CE










7304AG | 4,5W | LED | MR16 | GU10

LED 75 CRI

CE










7305AG | 5,5W | SMD LED | MR16 | GU10

LED 80 CRI

CE










7306G | 7W | SMD LED | MR16 | GU10

New 7306GC/W CRI97 version.

LED 80 CRI

CE











7308G | 7W | LED | MR16 | GU10

LED

CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7304WG/C/38	GU10	Cool white	4000K	5W	375lm	38°	230V	NO	100
7304WG/W/38	GU10	Warm white	3000K	5W	350lm	38°	230V	NO	100
7304AG/D/36	GU10	Daylight	6000K	4,5W	320m	36°	100-240V	NO	100
7305AG/D/38	GU10	Daylight	5700K	5,5W	380lm	38°	230V	NO	100
7305AG/W/38	GU10	Warm white	3000K	5,5W	380lm	38°	230V	NO	100
7306G/C	GU10	Cool white	4000K	7W	600lm	36°	230V	NO	100
7306G/W/24	GU10	Warm white	3000K	7W	450lm	24°	100-240V	NO	100
7308G/D/45	GU10	Daylight	6000K	7W	330lm	45°	100-240V	NO	100
7308G/W/45	GU10	Warm white	3000K	7W	260lm	45°	100-240V	NO	100



MR16 GU10 SMD LED




7305BG | 5W | SMD LED | MR16 | GU10

LED 80 CRI CE












7306LG | 5,5W | SMD LED | MR16 | GU10

LED 80 CRI CE












7307BG | 7W | SMD LED | MR16 | GU10

LED 80 CRI CE













7307CG | 7W | SMD LED | MR16 | GU10

LED 80 CRI CE









Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7305BG/C/50	GU10	Cool white	4000K	5W	350lm	50°	230V	NO	50
7305BG/W/50	GU10	Warm white	3000K	5W	350lm	50°	230V	NO	50
7306LG/D/38	GU10	Daylight	6500K	5,5W	375lm	38°	100-240V	NO	100
7306LG/C/38	GU10	Cool white	4000K	5,5W	360lm	38°	100-240V	NO	100
7306LG/W/38	GU10	Warm white	3000K	5,5W	345lm	38°	100-240V	NO	100
7307BG/C	GU10	Cool white	4000K	7W	550lm	90°	230V	NO	100
7307BG/W	GU10	Warm white	3000K	7W	540lm	90°	230V	NO	100
7307CG/W	GU10	Warm white	3000K	7W	430lm	100°	230V	NO	100



MR16 GU10 LED


Dimmable



7304WGD | 5W | SMD LED | MR16 | GU10 | Dimmable

LED · TRIAC DIMMABLE · 80 CRI · CE










7306LGD | 5,8W | SMD LED | MR16 | GU10 | Dimmable

LED · TRIAC DIMMABLE · 80 CRI · CE











7306GD | 7,5W | COB LED | MR16 | GU10 | Dimmable

New 7306GCD/EW CRI97 version.

LED · TRIAC DIMMABLE · 80 CRI · CE












7308GD | 7W | LED | MR16 | GU10 | Dimmable

LED · TRIAC DIMMABLE · CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7304WGD/W/38	GU10	Warm white	3000K	5W	350lm	38°	230V	YES	100
7306LGD/D/38	GU10	Daylight	6500K	5,8W	375lm	38°	230V	YES	100
7306GD/C	GU10	Cool white	4000K	7,5W	575lm	36°	230V	YES	100
7306GD/W	GU10	Warm white	3000K	7,5W	545lm	36°	230V	YES	100
7308GD/D/45	GU10	Daylight	6000K	7W	330lm	45°	230V	YES	100
7308GD/W/45	GU10	Warm white	3000K	7W	260lm	45°	230V	YES	100




MR16 GU10 COB LED



7305CG/C/120 | 5W | COB LED | MR16 | GU10

LED 80 CRI CE










7305CG/W | 5W | COB LED | MR16 | GU10

LED 80 CRI CE










7306CG | 6W | COB LED | MR16 | GU10

LED 85 CRI CE










7306CG/BL | 6W | COB LED | MR16 | GU10

LED CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7305CG/C/120	GU10	Cool white	4000K	5W	360lm	120°	230V	NO	100
7305CG/W	GU10	Warm white	3000K	5W	400lm	120°	230V	NO	100
7306CG/C	GU10	Cool white	4000K	6W	520lm	60°	230V	NO	100
7306CG/W	GU10	Warm white	3000K	6W	500lm	60°	230V	NO	100
7306CG/EW	GU10	Extra warm white	2700K	6W	480lm	60°	230V	NO	100
7306CG/BL	GU10	Blue	-	6W	-	60°	230V	NO	100



7307DGD/W/36

7306CGD/W

7306KGD/C/45

MR16 GU10 COB LED


Dimmable



7306KGD | 6,5W | COB LED | MR16 | GU10 | Dimmable

LED · TRIAC DIMMABLE · 80 CRI · CE










7306CGD | 6W | COB LED | MR16 | GU10 | Dimmable

LED · TRIAC DIMMABLE · 85 CRI · CE










7307DGD | 7W | COB LED | MR16 | GU10 | Dark light | Dimmable

LED · TRIAC DIMMABLE · 80 CRI · DARK LIGHT · CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7306KGD/C/45	GU10	Cool white	4000K	6,5W	500lm	45°	230V	YES	50
7306KGD/W/45	GU10	Warm white	3000K	6,5W	500lm	45°	230V	YES	50
7306CGD/C	GU10	Cool white	4000K	6W	520lm	60°	230V	YES	100
7306CGD/W	GU10	Warm white	3000K	6W	500lm	60°	230V	YES	100
7306CGD/EW	GU10	Extra warm white	2700K	6W	480lm	60°	230V	YES	100
7307DGD/W/36	GU10	Warm white	3000K	7W	500lm	36°	230V	YES	50





MR16 LED
Dimmable



7305M | 3x1W | LED | 350mA | Dimmable — LED module suitable for MR16 fittings.

LED · 75 CRI · DIMMABLE · QUICK FIX · CE









7312M | 4x3W | CREE LED | 700mA | Dimmable — LED module suitable for MR16 fittings.

LED · 75 CRI · DIMMABLE · QUICK FIX · CE











7309AM | 9W | COB LED | 350mA | Dimmable with optional 350mA driver — LED module suitable for MR16 fittings.

LED · 80 CRI · CE









Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable		Notes
7305M/D/15	Daylight	6000K	3x1W	-	15°	350mA	YES	100	Requires 350mA driver
7305M/D/30	Daylight	6000K	3x1W	-	30°	350mA	YES	100	Requires 350mA driver
7312M/D/30	Daylight	6000K	4x3W	600lm	30°	700mA	YES	100	Requires 700mA driver
7309AM/W/38	Warm white	3000K	9W	430lm	38°	230V	NO	50	Complete with driver



MR16 GU10 Halogen



7335G/40 | 35W | MR16 | GU10 | Dimmable

HALO DIMMABLE CE

53mm
50mm
40°



7350G/38SR | 50W | MR16 | GU10 | Dimmable | OSRAM

HALO DIMMABLE CE



53mm
50mm
38°



7350G/40 | 42W | MR16 | GU10 | Dimmable

HALO DIMMABLE CE

53mm
50mm
40°



7350G/GR

7350G | 50W | MR16 | GU10 | Dimmable

HALO DIMMABLE CE



7350G/Y

53mm
50mm
40°

Order Code	Lampholder	Light Colour	CCT (K)	Watts	Beam Angle	Input	Dimmable	
7335G/40	GU10	Extra warm white	2700K	35W	40°	230V	YES	200
7350G/38SR	GU10	Extra warm white	2700K	50W	38°	230V	YES	100
7350G/40	GU10	Extra warm white	2700K	42W	40°	230V	YES	200
7350G/GR	GU10	Green	-	50W	40°	230V	YES	200
7350G/Y	GU10	Yellow	-	50W	40°	230V	YES	200



PAR30



7450B | 50W | PAR30 | E27 | Dimmable

HALO

DIMMABLE

CE

90mm

97mm

28°




7306E | 11W | SMD LED | PAR30 | E27

LED

80 CRI

CE





94mm

95mm

36°

Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7450B/28/E	E27	Extra warm white	2700K	50W	-	28°	230V	YES	60
7306E/C	E27	Cool white	4000K	11W	820lm	36°	230V	NO	20
7306E/W	E27	Warm white	3000K	11W	770lm	36°	230V	NO	20



PAR30 COB LED




7310H | 10W | COB LED | PAR30 | E27

LED 80 CRI

CE









7306HD | 12W | COB LED | PAR30 | E27 | Dimmable


LED 80 CRI

TRIAC DIMMABLE

CE












7306B | 12W | COB LED | PAR30 | E27

LED 80 CRI

CE












7306A | 10W | COB LED | PAR30 | E27

LED 80 CRI

CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7310H/C	E27	Cool white	4000K	10W	750lm	40°	230V	NO	20
7310H/W	E27	Warm white	3000K	10W	700lm	40°	230V	NO	20
7306HD/W	E27	Warm white	3000K	12W	850lm	36°	230V	YES	20
7306B/C/45	E27	Cool white	4000K	12W	840lm	45°	230V	NO	20
7306A/W/35	E27	Warm white	3000K	10W	500lm	35°	230V	NO	30



PAR38


9R23/BL/E

9R23 | 23W | PAR38 | E27 | Colour

FLUO IP65

CE


9R23/R/E







9R16 | 16W | SMD LED | PAR38 | E27

LED 80 CRI

CE









9R27 | 16W | COB LED | PAR38 | E27

LED 80 CRI

CE









Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9R23/BL/E	E27	Blue	-	23W	-	60°	230V	NO	40
9R23/R/E	E27	Red	-	23W	-	60°	230V	NO	40
9R16/W/E	E27	Warm white	3000K	16W	1400lm	38°	230V	NO	20
9R27/W/E	E27	Warm white	3000K	16W	1100lm	36°	100-240V	NO	6



R111 GU10 Halo & Fluo



7375R | 75W | R111 | GU10 | Dimmable

HALO

DIMMABLE

CE

74mm

111mm

24°



7511R | 11W | R111 | GU10

FLUO

CE

93mm

111mm



7520R | 20W | R111 | GU10

FLUO

CE

80mm

111mm

Order Code	Lampholder	Light Colour	CCT (K)	Watts	Beam Angle	Input	Dimmable	
7375R/24	GU10	Extra warm white	2700K	75W	24°	230V	YES	60
7511R/D	GU10	Daylight	6000K	11W	-	230V	NO	40
7511R/W	GU10	Warm white	3000K	11W	-	230V	NO	40
7520R/D	GU10	Daylight	6000K	20W	-	230V	NO	40
7520R/W	GU10	Warm white	3000K	20W	-	230V	NO	40




R111 GU10 LED



7312AG | 12W | SMD LED | R111 | GU10

LED 80 CRI CE










7315G | 15W | SMD LED | R111 | GU10

LED 80 CRI CE










7315CG | 15W | COB LED | R111 | GU10

LED 80 CRI CE










7309AG | 10W | COB LED | R111 | GU10

LED 80 CRI CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7312AG/C	GU10	Cool white	4000K	12W	1000lm	36°	230V	NO	20
7312AG/W	GU10	Warm white	3000K	12W	960lm	36°	230V	NO	20
7315G/C/45	GU10	Cool white	4000K	15W	1200lm	45°	230V	NO	20
7315G/W/45	GU10	Warm white	3000K	15W	1200lm	45°	230V	NO	20
7315CG/C	GU10	Cool white	4000K	15W	1200lm	24°	230V	NO	20
7315CG/W	GU10	Warm white	3000K	15W	1150lm	24°	230V	NO	20
7309AG/C/35	GU10	Cool white	4000K	10W	500lm	35°	230V	NO	30
7309AG/W/35	GU10	Warm white	3000K	10W	500lm	35°	230V	NO	30



R111 GU10 LED


Dimmable



7513AGD | 13W | SMD LED | R111 | GU10 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE










7315GD | 15W | SMD LED | R111 | GU10 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE










7312AGD | 12W | SMD LED | R111 | GU10 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE










7309AGD | 12W | COB LED | R111 | GU10 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7513AGD/C/24	GU10	Cool white	4000K	13W	850lm	24°	230V	YES	24
7513AGD/W/24	GU10	Warm white	3000K	13W	850lm	24°	230V	YES	24
7315GD/W/45	GU10	Warm white	3000K	15W	1200lm	45°	230V	YES	20
7312AGD/C	GU10	Cool white	4000K	12W	1000lm	36°	230V	YES	20
7312AGD/W	GU10	Warm white	3000K	12W	960lm	36°	230V	YES	20
7309AGD/C/35	GU10	Cool white	4000K	12W	600lm	35°	230V	YES	30
7309AGD/W/35	GU10	Warm white	3000K	12W	600lm	35°	230V	YES	30




R111 G53 SMD LED



7513A | 13W | SMD LED | R111 | G53

LED 80 CRI CE










7515A | 15W | SMD LED | R111 | G53

LED 80 CRI CE










7512A | 12W | SMD LED | R111 | G53

LED 80 CRI CE










7517A | 17W | SMD LED | R111 | G53

LED 80 CRI CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7513A/C	G53	Cool white	4000K	13W	850lm	24°	12V AC/DC	NO	24
7513A/W	G53	Warm white	3000K	13W	850lm	24°	12V AC/DC	NO	24
7515A/C	G53	Cool white	4000K	15W	1000lm	36°	12V AC/DC	NO	20
7515A/W	G53	Warm white	3000K	15W	1000lm	36°	12V AC/DC	NO	20
7512A/C	G53	Cool white	4000K	12W	1000lm	36°	12V AC/DC	NO	20
7512A/W	G53	Warm white	3000K	12W	960lm	36°	12V AC/DC	NO	20
7517A/C	G53	Cool white	4000K	17W	1200lm	45°	12V AC/DC	NO	20
7517A/W	G53	Warm white	3000K	17W	1200lm	45°	12V AC/DC	NO	20



R111 G53 COB LED




7510R | 10W | COB LED | R111 | G53

LED 80 CRI

CE










7512C | 12W | COB LED | R111 | G53

LED 80 CRI

CE










7510AR | 10W | COB LED | R111 | G53

LED 80 CRI

CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7510R/D/45	G53	Daylight	6000K	10W	580lm	45°	12V AC/DC	NO	40
7510R/W/45	G53	Warm white	3000K	10W	540lm	45°	12V AC/DC	NO	40
7512C/W	G53	Warm white	3000K	12W	960lm	24°	12V AC/DC	NO	20
7510AR/W/35	G53	Warm white	3000K	10W	500lm	35°	12V AC/DC	NO	30



R111 LED
Dimmable



10106NA/AL | 6x1W@350mA / 6x3W@700mA | LED | R111 | Dimmable


LED | DIMMABLE | 85 CRI | QUICK FIX | CE



LED module suitable for R111 fittings.



Use driver 89030A. (non-dimmable).





10106NA/W | 6x1W@350mA / 6x3W@700mA | LED | R111 | Dimmable


LED | DIMMABLE | 85 CRI | QUICK FIX | CE



LED module suitable for R111 fittings.



Use driver 89030A. (non-dimmable).





7521R | 21W | COB LED | R111 | Dimmable with optional 500mA driver


LED | 80 CRI | QUICK FIX | CE



LED module suitable for R111 fittings.



Complete with 500mA driver.



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
10106NA/AL/D/35	Daylight	6000K	6x1W/6x3W	1100lm@3W	35°	350mA/700mA	YES	20
10106NA/AL/W/35	Warm white	3000K	6x1W/6x3W	1100lm@3W	35°	350mA/700mA	YES	20
10106NA/W/D/35	Daylight	6000K	6x1W/6x3W	1100lm@3W	35°	350mA/700mA	YES	20
10106NA/W/W/35	Warm white	3000K	6x1W/6x3W	1100lm@3W	35°	350mA/700mA	YES	20
7521R/C/24	Cool white	4000K	21W	1625lm	24°	100-240V	NO	20
7521R/W/24	Warm white	3000K	21W	1595lm	24°	100-240V	NO	20



7524D/W/30

7512D/D/30

R111 LED
Dimmable



7512D | 12x1W | CREE LED | 350mA | R111 | Dimmable

Requires 350mA driver.


LED | DIMMABLE | 80 CRI | QUICK FIX | CE



LED module suitable for R111 fittings.



Use driver 89015. (non-dimmable).





7524D | 12x2W | CREE LED | 500mA | R111 | Dimmable

Requires 500mA driver.


LED | DIMMABLE | 80 CRI | QUICK FIX | CE



LED module suitable for R111 fittings.



Use driver 89030C. (non-dimmable).





7524BD | 12x2W | LED | 500mA | R111 | Dimmable

Requires 500mA driver.


LED | DIMMABLE | 80 CRI | QUICK FIX | CE



LED module suitable for R111 fittings.



Use driver 89030C. (non-dimmable).



Order Code	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7512D/D/30	Daylight	6000K	12x1W	710lm	30°	350mA	YES	40
7512D/W/30	Warm white	3000K	12x1W	560lm	30°	350mA	YES	40
7524D/W/30	Warm white	3000K	12x2W	830lm	30°	500mA	YES	40
7524BD/W/30	Warm white	3000K	12x2W	860lm	30°	500mA	YES	20



R7s SMD LED




7605L | 5W | SMD 2835 | R7s

Halogen 78mm replacement.

LED 80 CRI CE





360°



7610L | 10W | SMD 2835 | R7s

Halogen 118mm & 70W HQI replacement.

LED 80 CRI CE



360°



7612L | 12W | SMD 2835 | R7s

150W HQI replacement.

LED 80 CRI CE





360°



7615L | 15W | SMD 2835 | R7s

Halogen 189mm (1000W) replacement.

LED 80 CRI CE





360°

Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7605L/C	R7s	Cool white	4000K	5W	420lm	360°	230V	NO	100
7605L/W	R7s	Warm white	3000K	5W	400lm	360°	230V	NO	100
7610L/C	R7s	Cool white	4000K	10W	930lm	360°	230V	NO	100
7610L/W	R7s	Warm white	3000K	10W	900lm	360°	230V	NO	100
7612L/C	R7s	Cool white	4000K	12W	1050lm	360°	230V	NO	100
7612L/W	R7s	Warm white	3000K	12W	1000lm	360°	230V	NO	100
7615L/C	R7s	Cool white	4000K	15W	1350lm	360°	230V	NO	50



7610A/C

7607A/C

7604/C

R7s COB LED



7604 | 4,5W | COB LED | R7s


Halogen 78mm replacement.

LED 80 CRI

CE











7607A | 7W | COB LED | R7s


Halogen 118mm & 70W HQI replacement.

LED 80 CRI

CE











7610A | 10W | COB LED | R7s

150W HQI replacement.

LED 80 CRI

CE









Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
7604/C	R7s	Cool white	4000K	4,5W	350lm	180°	100-240V	NO	100
7607A/C	R7s	Cool white	4000K	7W	600lm	180°	100-240V	NO	100
7610A/C	R7s	Cool white	4000K	10W	850lm	180°	100-240V	NO	50



R7s



7606 / 7610 / 7615 | R7s | Dimmable

HALO · DIMMABLE · CE





7610A / 7615A / 7630A / 7650A | R7s | Dimmable

HALO · DIMMABLE · CE






7613C | 13W | R7s

CFL replacement for R7s halogen lamps.

FLUO · CE



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Input	Dimmable	
7606	R7s	Extra warm white	2700K	60W	230V	YES	500
7610	R7s	Extra warm white	2700K	80W	230V	YES	500
7615	R7s	Extra warm white	2700K	120W	230V	YES	500
7610A	R7s	Extra warm white	2700K	120W	230V	YES	500
7615A	R7s	Extra warm white	2700K	160W	230V	YES	500
7630A	R7s	Extra warm white	2700K	240W	230V	YES	500
7650A	R7s	Extra warm white	2700K	500W	230V	YES	500
7613C/W	R7s	Extra warm white	2700K	13W	230V	NO	100

GX53



9F07 | 7W | GX53

FLUO

CE






9F13 | 13W | GX53

FLUO



CE





9F01 | 1,5W | LED | GX53

LED

CE



9F01/BL





9F07L | 7W | SMD LED | GX53

LED 80 CRI

CE










9F07LD | 7W | SMD LED | GX53 | Dimmable

LED 80 CRI TRIAC DIMMABLE

CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9F07/D	GX53	Daylight	6000K	7W	-	230V	NO	100
9F13/D	GX53	Daylight	6500K	13W	470lm	230V	NO	100
9F13/W	GX53	Warm white	2700K	13W	470lm	230V	NO	100
9F01/D	GX53	Daylight	6000K	1,5W	-	230V	NO	100
9F01/W	GX53	Warm white	3000K	1,5W	-	230V	NO	100
9F01/BL	GX53	Blue	-	1,5W	-	230V	NO	100
9F07L/C	GX53	Cool white	4000K	7W	500lm	230V	NO	100
9F07L/W	GX53	Warm white	3000K	7W	500lm	230V	NO	100
9F07LD/C	GX53	Cool white	4000K	7W	480lm	230V	YES	100
9F07LD/W	GX53	Warm white	3000K	7W	480lm	230V	YES	100



Candles LED




9C04A | 4W | LED | E14

LED

CE







9C06B | 6W | SMD LED | E14

LED 80 CRI

CE







9C05N | 5W | SMD LED | E14

LED 80 CRI

CE





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9C04A/W/SE	E14	Warm white	2700K	4W	220lm	100-240V	NO	100
9C06B/D/SE	E14	Daylight	6000K	6W	480lm	230V	NO	100
9C06B/EW/SE	E14	Extra warm white	2700K	6W	450lm	230V	NO	100
9C05N/W/SE	E14	Warm white	3000K	5W	380lm	230V	NO	50



9C05ND/W/SE

9C06BD/EW/SE

9C05BD/W/SB

Candles LED
Dimmable



9C05BD | 5W | SMD LED | B15 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE







9C06BD | 6W | SMD LED | E14 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE









9C05ND | 5W | SMD LED | E14 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9C05BD/W/SB	B15	Warm white	3000K	5W	400lm	230V	YES	50
9C06BD/EW/SE	E14	Extra warm white	2700K	6W	450lm	230V	YES	100
9C05ND/W/SE	E14	Warm white	3000K	5W	350lm	230V	YES	50



Classic Lamps LED




9G07B | 6W | SMD LED | E27

LED 80 CRI

CE









9G12B | 10,5W | SMD LED | E27

LED 80 CRI

CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9G07B/C/E	E27	Cool white	4000K	6W	510lm	230V	NO	50
9G07B/EW/E	E27	Extra warm white	2700K	6W	480lm	230V	NO	50
9G12B/D/E	E27	Daylight	6000K	10,5W	950lm	230V	NO	50
9G12B/C/E	E27	Cool white	4000K	10,5W	900lm	230V	NO	50
9G12B/EW/E	E27	Extra Warm white	2700K	10,5W	850lm	230V	NO	50



Classic Lamps LED


Dimmable



9G12BD | 10,5W | SMD LED | E27 | Dimmable

LED · TRIAC DIMMABLE · 80 CRI · CE








9G12D | 12W | SMD LED | E27 | 3-Step dimming | Dimmable

LED · TRIAC DIMMABLE · 80 CRI · CE









Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9G12BD/EW/E	E27	Extra warm white	2700K	10,5W	850lm	230V	YES	50
9G12D/EW/E	E27	Extra warm white	2700K	12W	1050lm	230V	YES	100

one



Classic A60 Special Functions




9G10L | 10W | SMD LED | E27 | Night operating — ON when < 5lux, OFF when >300lux

LED 80 CRI CE












9G10M | 10W | SMD LED | E27 | Microwave motion sensor — Operates only when <5lux

LED 80 CRI CE










9G10V | 10W | SMD LED | E27 | 3-Step colour temperature changing

LED 80 CRI CE












9G09/RGBW | 9W | SMD LED | E27 | RGBW + Remote

LED 80 CRI DIMMABLE CE





Supplied with remote control.



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9G10L/EW/E	E27	Extra warm white	2700K	10W	800lm	230V	NO	100
9G10M/EW/E	E27	Extra warm white	2700K	10W	800lm	230V	NO	100
9G10V/E	E27	Extra warm white - Cool white - Daylight	2700K - 4000K - 6000K	10W	800lm	230V	NO	100
9G09/RGBW	E27	RGB + Warm white	RGB + 3000K	9W	720lm (3000K)	100-240V	YES	100

G95 & G120 LED Globe Lamps



9G15L/D/E

9G20L/EW/E



9G15L | 15W | SMD LED | G95 | E27

LED 80 CRI

CE

ENERGY EFFICIENCY CLASS A++ A+ A B C D E — A+ — 15,00 kWh/1000h

138mm

95mm



9G20L | 20W | SMD LED | G120 | E27

LED 80 CRI

CE

ENERGY EFFICIENCY CLASS A++ A+ A B C D E — A+ — 20,00 kWh/1000h

160mm

120mm



9G20LD | 20W | SMD LED | G120 | E27 | Dimmable

LED 80 CRI

TRIAC DIMMABLE

CE

ENERGY EFFICIENCY CLASS A++ A+ A B C D E — A+ — 20,00 kWh/1000h

160mm

120mm

Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9G15L/D/E	E27	Daylight	6000K	15W	1350lm	230V	NO	50
9G15L/EW/E	E27	Extra warm white	2700K	15W	1300lm	230V	NO	50
9G20L/EW/E	E27	Extra warm white	2700K	20W	1700lm	230V	NO	40
9G20LD/D/E	E27	Daylight	6000K	20W	1800lm	230V	YES	40
9G20LD/EW/E	E27	Extra warm white	2700K	20W	1700lm	230V	YES	40



Waterproof LED
E27

9G09P/D/E

9G20P/C/E



9G09P | 10W | SMD 2835 | E27 / B22

LED 80 CRI

IP44 CE










9G20P | 20W | SMD 2835 | E27

LED 80 CRI

IP64 CE










9G30P | 30W | SMD 2835 | E27

LED 80 CRI

IP64 CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9G09P/D/E	E27	Daylight	6000K	10W	1000lm	300°	230V	NO	100
9G09P/D/B	B22	Daylight	6000K	10W	1000lm	300°	230V	NO	100
9G09P/C/E	E27	Cool white	4000K	10W	950lm	300°	230V	NO	100
9G09P/C/B	B22	Cool white	4000K	10W	950lm	300°	230V	NO	100
9G20P/C/E	E27	Cool white	4000K	20W	1610lm	240°	230V	NO	20
9G30P/C/E	E27	Cool white	4000K	30W	2400lm	240°	230V	NO	20



High Power LED

E27 & E40




9G20N | 20W | SMD 2835 | E27

LED 80 CRI

CE










9G30N | 30W | SMD 2835 | E27

LED 80 CRI

CE










9G50N | 50W | SMD 2835 | E40

LED 80 CRI

CE










9G80N | 80W | SMD 2835 | E40

LED 80 CRI

CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9G20N/C/E	E27	Cool white	4000K	20W	1610lm	240°	230V	NO	20
9G20N/W/E	E27	Warm white	3000K	20W	1610lm	240°	230V	NO	20
9G30N/C/E	E27	Cool white	4000K	30W	2410lm	240°	230V	NO	20
9G30N/W/E	E27	Warm white	3000K	30W	2410lm	240°	230V	NO	20
9G50N/C/LE	E40	Cool white	4000K	50W	4500lm	240°	230V	NO	12
9G80N/C/LE	E40	Cool white	4000K	80W	7200lm	120°	230V	NO	6

Retro Amber Lamps LED

Dimmable





9C05RD | 5W | LED | E14 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE







9G03RAD | 6,5W | LED | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE









9T05RD | 5W | LED | T28 | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE








9G04RAD | 7W | LED | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE








9G06RD | 7W | LED | G125 | E27 | Dimmable

LED 80 CRI TRIAC DIMMABLE CE





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9C05RD/A/SE	E14	Amber	2200K	5W	400lm	230V	YES	100
9G03RAD/A/E	E27	Amber	2200K	6,5W	550lm	230V	YES	100
9T05RD/A/E	E27	Amber	2200K	5W	380lm	230V	YES	100
9G04RAD/A/E	E27	Amber	2200K	7W	520lm	230V	YES	50
9G06RD/A/E	E27	Amber	2200K	7W	520lm	230V	YES	20



Retro Lamps LED




9C02R | 2W | LED | E14

LED 80 CRI

CE







9G03R | 4W | LED | E27

LED 80 CRI

CE







9G04RA | 4W | LED | E27

LED 80 CRI

CE







9G04R | 4W | LED | G95 | E27

LED 80 CRI

CE








9G06R | 6W | LED | G125 | E27

LED 80 CRI


CE



9G06RD | 5W | LED | G125 | E27 | Dimmable







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9C02R/EW/SE	E14	Extra warm white	2700K	2W	250lm	230V	NO	100
9G03R/W/E	E27	Warm white	3000K	4W	420lm	230V	NO	100
9G04RA/EW/E	E27	Extra warm white	2700K	4W	470lm	230V	NO	50
9G04R/EW/E	E27	Extra warm white	2700K	4W	470lm	230V	NO	50
9G06R/EW/E	E27	Extra warm white	2700K	6W	800lm	230V	NO	20
9G06RD/EW/E	E27	Extra warm white	2700K	5W	600lm	230V	YES	20

one



G45 LED Ball Lamps



9G01/W | 0,5W | SMD LED | G45 | B22

LED

CE






9G06M | 6W | SMD LED | G45 | E27

LED 80 CRI

CE








9G01 | 0,5W | SMD LED | G45 | E27

LED

CE






9G01 | 0,5W | SMD LED | G45 | B22

LED

CE



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9G01/W/B	B22	Warm white	3000K	0,5W	-	230V	NO	200
9G06M/EW/E	E27	Extra warm white	2700K	6W	480lm	230V	NO	100
9G01/BL/E	E27	Blue	-	0,5W	-	230V	NO	200
9G01/BL/B	B22	Blue	-	0,5W	-	230V	NO	200
9G01/GR/E	E27	Green	-	0,5W	-	230V	NO	200
9G01/GR/B	B22	Green	-	0,5W	-	230V	NO	200
9G01/R/E	E27	Red	-	0,5W	-	230V	NO	200
9G01/R/B	B22	Red	-	0,5W	-	230V	NO	200



Spiral Colour CFL E27



9S13/GR/E | 13W | E27

FLUO

CE

121mm

43mm



9S23/BL/E | 23W | E27

FLUO

CE

152mm

60mm



9S23/Y/E | 23W | E27

FLUO

CE

152mm

60mm

Order Code	Lampholder	Light Colour	Watts	Input	Dimmable	
9S13/GR/E	E27	Green	13W	230V	NO	100
9S23/BL/E	E27	Blue	23W	230V	NO	100
9S23/Y/E	E27	Yellow	23W	230V	NO	100



U Tube CFL

E27



9432 | 32W | E27

FLUO

CE

182mm

58mm



9465 | 65W | E27

FLUO

CE

250mm

72mm

Order Code	Lampholder	Light Colour	CCT (K)	Watts	Input	Dimmable	
9432/W/E	E27	Warm white	3000K	32W	230V	NO	25
9465/W/E	E27	Warm white	3000K	65W	230V	NO	25



LED Recflector


R50 / R63



9R07 | 5W | SMD LED | R50 | E14

LED | 1:1 size | 80 CRI | CE










9R08 | 8W | SMD LED | R63 | E27

LED | 1:1 size | 80 CRI | CE







Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9R07/W/SE	E14	Warm white	3000K	5W	350lm	120°	230V	NO	100
9R08/W/E	E27	Warm white	3000K	8W	580lm	120°	230V	NO	80

PL Lamps



8107 | 7W | G23 | 2pins

FLUO

CE





8213 | 13W | G24d | 2pins

FLUO

CE





8213/C/4SR | 8213/W/4SR | 13W | G24q | 4pins | OSRAM

FLUO

CE








8218 | 18W | G24q | 4pins

FLUO

CE





8218/D/4SR | 8218/C/4SR | 18W | G24q | 4pins | OSRAM

FLUO

CE








8226/W/4SR | 26W | G24q | 4pins | OSRAM

FLUO

CE





Order Code	Lampholder	Light Colour	CCT (K)	Watts		Notes
8107/D/2	G23	Daylight	6000K	7W	200	Requires ballast
8107/C/2	G23	Cool white	4000K	7W	200	Requires ballast
8107/W/2	G23	Warm white	3000K	7W	200	Requires ballast
8213/C/2	G24d-1	Cool white	4000K	13W	100	Requires ballast
8213/C/4SR	G24q-1	Cool white	4000K	13W	50	Requires ballast
8213/W/4SR	G24q-1	Warm white	3000K	13W	50	Requires ballast
8218/C/4	G24q-2	Cool white	4000K	18W	100	Requires ballast
8218/W/4	G24q-2	Warm white	3000K	18W	100	Requires ballast
8218/D/4SR	G24q-2	Daylight	6000K	18W	50	Requires ballast
8218/C/4SR	G24q-2	Cool white	4000K	18W	50	Requires ballast
8226/W/4SR	G24q-3	Warm white	3000K	26W	50	Requires ballast

G24 & G10 Lamps





9D03 | 3W | LED | G24 | Rotating











8318 | 18W | GX24d / 2pins | GX24q / 4 pins





8332 | 32W | GX24q | 4pins






8342 | 42W | GX24q | 4pins





8218A | 18W | 2G10 | 4pins



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable		Notes
9D03/C/2	G24	Cool white	4000K	3W	240lm	140°	230V	NO	10	-
8318/C/2	GX24d-2	Cool white	4000K	18W	-	-	-	NO	50	Requires ballast
8318/C/4	GX24q-2	Cool white	4000K	18W	-	-	-	NO	50	Requires ballast
8332/D/4	GX24q-3	Daylight	6000K	32W	-	-	-	NO	50	Requires ballast
8342/D/4	GX24q-4	Daylight	6000K	42W	-	-	-	NO	50	Requires ballast
8342/W/4	GX24q-4	Warm white	3000K	42W	-	-	-	NO	50	Requires ballast
8218A/C/4	2G10	Cool white	4000K	18W	-	-	-	NO	50	Requires ballast

T4, T5C, T9C LED



9012 | 12W | T4

FLUO

CE







9955A | 55W | T5C | 2GX13

FLUO

CE





9922L | 11W | LED | T9 | G10Q

LED 80 CRI

CE







9932L | 16W | LED | T9 | G10Q

LED 80 CRI

CE







9940L | 20W | LED | T9 | G10Q

LED 80 CRI

CE





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable	
9012/D	G5	Daylight	6000K	12W	-	230V	NO	100
9012/C	G5	Cool white	4000K	12W	-	230V	NO	100
9012/W	G5	Warm white	3000K	12W	-	230V	NO	100
9955A/D	2GX13	Daylight	6000K	55W	-	230V	NO	30
9922L/D	G10Q	Daylight	6000K	11W	1000lm	230V	NO	20
9932L/D	G10Q	Daylight	6000K	16W	1450lm	230V	NO	20
9940L/D	G10Q	Daylight	6000K	20W	1800lm	230V	NO	10






2D Fluo



9816 | 16W | 2D | 4pins

FLUO

CE






9821 | 21W | 2D | 2pins

FLUO

CE






9828 | 28W | 2D | 2pins

FLUO

CE






9838 | 38W | 2D | 2pins

FLUO

CE



Order Code	Lampholder	Light Colour	CCT (K)	Watts		Notes
9816/C/4	GR10q	Cool white	4000K	16W	40	Requires ballast
9821/D/2	GR8	Daylight	6000K	21W	40	Requires ballast
9821/C/2	GR8	Cool white	4000K	21W	40	Requires ballast
9821/W/2	GR8	Warm white	3000K	21W	40	Requires ballast
9828/D/2	GR8	Daylight	6000K	28W	20	Requires ballast
9828/C/2	GR8	Cool white	4000K	28W	20	Requires ballast
9838/C/2	GR8	Cool white	4000K	38W	20	Requires ballast

T8 LED Tubes


Rotating



9011L/D




9011L | 11W | SMD LED | T8 | Rotating

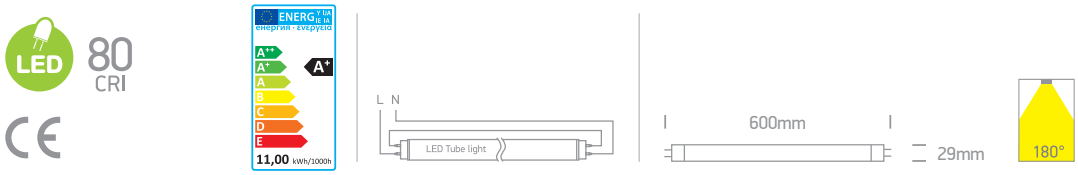




9021L | 21W | SMD LED | T8 | Rotating

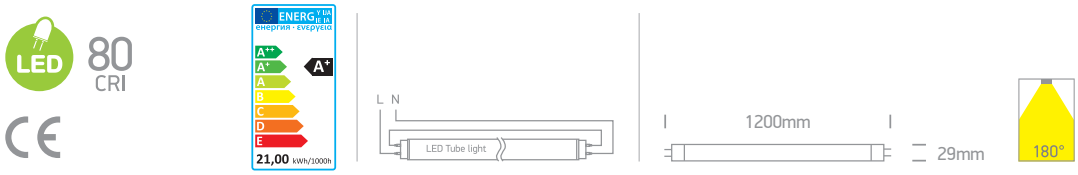



9026L | 25W | SMD LED | T8 | Rotating

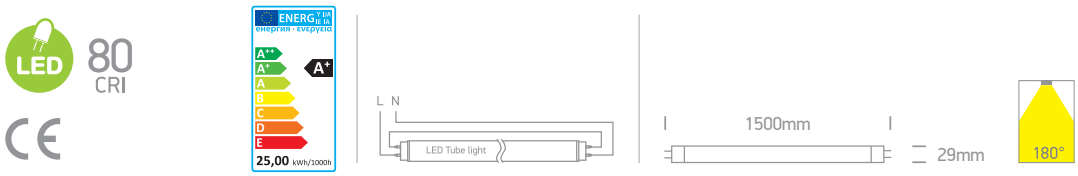

Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9011L/D	G13	Daylight	6000K	11W	1000lm	180°	100-240V	NO	25
9011L/C	G13	Cool white	4000K	11W	1000lm	180°	100-240V	NO	25
9021L/C	G13	Cool white	4000K	21W	1900lm	180°	100-240V	NO	20
9021L/W	G13	Warm white	3000K	21W	1650lm	120°	230V	NO	20
9026L/D	G13	Daylight	6000K	25W	2300lm	180°	100-240V	NO	20
9026L/C	G13	Cool white	4000K	25W	2300lm	180°	100-240V	NO	20
9026L/W	G13	Warm white	3000K	25W	2100lm	120°	230V	NO	20



T8 LED Tubes Glass




9009L | 9W | SMD 2835 | T8 | Glass

LED 80 CRI

CE













9012L | 12W | SMD LED | T8 | Glass

LED 80 CRI

CE












9018L | 18W | SMD 2835 | T8 | Glass

LED 80 CRI

CE












9022L | 24W | SMD 2835 | T8 | Glass

LED 80 CRI

CE













9032L | 32W | SMD 2835 | T8 | Glass

LED 80 CRI

CE









Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable	
9009L/D	G13	Daylight	6500K	9W	900lm	260°	100-240V	NO	25
9009L/C	G13	Cool white	4000K	9W	900lm	260°	100-240V	NO	25
9009L/W	G13	Warm white	3000K	9W	870lm	260°	100-240V	NO	25
9012L/D	G13	Daylight	6500K	12W	1200lm	260°	230V	NO	20
9018L/D	G13	Daylight	6500K	18W	1800lm	260°	100-240V	NO	25
9018L/C	G13	Cool white	4000K	18W	1800lm	260°	100-240V	NO	25
9018L/W	G13	Warm white	3000K	18W	1720lm	260°	100-240V	NO	25
9022L/D	G13	Daylight	6500K	24W	2400lm	260°	230V	NO	25
9022L/C	G13	Cool white	4000K	24W	2400lm	260°	230V	NO	25
9022L/W	G13	Warm white	3000K	24W	2300lm	260°	230V	NO	25
9032L/D	G13	Daylight	6500K	32W	3200lm	260°	230V	NO	12
9032L/C	G13	Cool white	4000K	32W	3200lm	260°	230V	NO	12



8003M/C/24





8007M/C/10

HQI CDM-R PAR30




8003M | 35W | CDM-R PAR30 | E27







8007M | 70W | CDM-R PAR30 | E27





Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable		Notes
8003M/C/10	E27	Cool white	4000K	35W	1750lm	10°	230V	NO	6	Requires ballast
8003M/C/24	E27	Cool white	4000K	35W	1750lm	24°	230V	NO	6	Requires ballast
8007M/C/10	E27	Cool white	4000K	70W	3500lm	10°	230V	NO	6	Requires ballast



8007/BL

HQI Colour Lamps

Rx7s & G12



8007/BL | 70W | Rx7s | Metal halide

HQI

CE

118mm

24mm



8007/GR | 70W | Rx7s | Metal halide

HQI

CE

118mm

24mm



8007/M | 70W | Rx7s | Metal halide

HQI

CE

118mm

24mm



8007G/BL | 70W | G12 | Metal halide

HQI

CE

106mm

23mm



8007G/M | 70W | G12 | Metal halide

HQI

CE

106mm

23mm


Order Code	Lampholder	Light Colour	Watts	Input	Dimmable		Notes
8007/BL	Rx7s	Blue	70W	230V	NO	100	Requires ballast
8007/GR	Rx7s	Green	70W	230V	NO	100	Requires ballast
8007/M	Rx7s	Magenta	70W	230V	NO	100	Requires ballast
8007G/BL	G12	Blue	70W	230V	NO	20	Requires ballast
8007G/M	G12	Magenta	70W	230V	NO	20	Requires ballast



HQI Rx7s 70W & 150W




8007 | 70W | Rx7s | Metal halide





8015 | 150W | Rx7s | Metal halide



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Dimmable		Notes
8007/W	Rx7s	Warm white	3000K	70W	5250lm	230V	NO	50	Requires ballast
8015/W	Rx7s	Warm white	3000K	150W	11000lm	230V	NO	50	Requires ballast



HQI G8,5 & G12




8010L | 10W | SMD 2835 | G12

HQI G12 replacement.

LED 80 CRI










8002GA | 20W | G8,5 | Ceramic


HQI





8003GC | 35W | G12 | Ceramic


HQI





8015G | 150W | G12 | Metal halide


HQI





8015GC | 150W | G12 | Ceramic

HQI



Order Code	Lampholder	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Dimmable		Notes
8010L/C	G12	Cool white	4000K	10W	1050lm	360°	100-240V	NO	1	-
8010L/W	G12	Warm white	3000K	10W	1000lm	360°	100-240V	NO	1	-
8002GA/C	G8,5	Cool white	4000K	20W	1600lm	-	230V	NO	20	Requires ballast
8003GC/C	G12	Cool white	4000K	35W	2800lm	-	230V	NO	20	Requires ballast
8015G/C	G12	Cool white	4000K	150W	11250lm	-	230V	NO	20	Requires ballast
8015G/W	G12	Warm white	3000K	150W	11250lm	-	230V	NO	20	Requires ballast
8015GC/C	G12	Cool white	4000K	150W	12000lm	-	230V	NO	20	Requires ballast





27

Accessories

Pages 605-610

COB LED | Waterproof | Lampholders | Torch Lights | Handy Lights

IP20 IP67 IP68





LED Accessories



89003/EXT | 3-way extension for 350mA / 500mA LED fittings

200cm

Suitable for all 350mA LED fittings with fast connection system.

100



89003A/EXT | 3-way extension for 700mA LED fittings

200cm

Suitable for all 700mA LED fittings with fast connection system.

100



89006/EXT | 6-way extension for 350mA / 500mA LED fittings

200cm

Suitable for all 350mA LED fittings with fast connection system.

100



89006A/EXT | 6-way extension for 700mA LED fittings

200cm

Suitable for all 700mA LED fittings with fast connection system.

100




Waterproof Accessories



0800B | Waterproof connection box 1 IN / 1 OUT

IP67

CE




50



0800A | Waterproof connection box 1 IN / 2 OUT

IP67

CE




50



0800 | 500V | 10A | Waterproof connection box 1 IN / 2 OUT

IP68

CE



70



60000 | Square plate for BS box

CE


60000/AL Aluminium
60000/W White
60000/G Grey

10



7010P | Plastic spike for garden spots

CE




200





0950GA | 100-240V | GU10 Lampholder | Double insulated


18cm



50



0950G | 100-240V | GU10 Lampholder with bracket | Double insulated




50



0962G | 230V | GX8,5

30cm

0960G | 230V | GX10



500

LED Night Lights



70026





70028



70028 | LED Rechargeable Torch | EU Socket | Plastic












70026 | LED Rechargeable Torch | BS Socket | Plastic







Order Code	Colour	Watts	Input	Class		Notes
70028	Grey	-	230V		48	-
70026	Grey	-	230V		48	-




Torch Lights



70020 | 50W | HID Torch | HID XENON H1 | Rechargeable

CE

1200m range






70030 | 70W | LED | Aluminium | Underwater | Rechargeable

120m max IP68

CE



Order Code	Colour	Watts	Battery Type	Lumen (lm)		Notes
70020	Black	50W	Li-ion rechargeable battery	3500lm	5	Complete with AC charger
70030	Black	70W	9x18650 Li-ion, 12,6V, 7800mA	7000lm	4	Complete with AC/DC charger

LED Handy Lights



70038 70036




70038 | COB LED | Wardrobe / Magnet portable light


Batteries included



Complete with display box.



Adjustable hook






70036 | COB LED | Wardrobe / Magnet portable light


Batteries included



Complete with display box.




Adjustable hook





70034 | LED Portable light


Batteries included





70032 | 1W | SMD 2835 | USB LED light





Order Code	Colour	Battery Type	Light Colour	CCT (K)	Watts	Lumen (lm)	
70038	Black	3xAAA	-	-	-	-	12
70036	Black	3xAAA	-	-	-	-	12
70034	Black	3xAAA	-	-	-	-	100
70032	White	USB	Daylight	6000K	1W	50lm	1


one
LIGHT
outdoor



28

Advertising & Marketing

Pages 613-614

Stickers | Packing Tape | Note Pads | Plastic Bags | T-Shirts



www.1-light.eu



Stickers & Tape

060020 | one | Sticker

120mm × 140mm

060020A | one | Sticker

290mm × 340mm

060016 | switch to one light | Sticker



300mm × 90mm

060018 | one light available here | Sticker



300mm × 90mm

060008 | Packing Tape




4500mm × 50mm

T-Shirts, Bags & Pads






060010 | A5 Note Pad






060012 | Small Plastic Bag





060014 | Large Plastic Bag





060026 | T-Shirt | SMALL

060027 | T-Shirt | MEDIUM

060028 | T-Shirt | LARGE

060029 | T-Shirt | XLARGE

060030 | T-Shirt | XXLARGE

040008FD 122, 127
040012FD 122
040016FD 127
040018FD 123
040022FD 127
040030FD 123, 128
040060 121, 126, 365, 366
050017 129, 130, 131, 132, 133
050042 32
050042A 32
050044 103
050084 486
050086 91
050086A 91
050088 91
050088A 91
050090 280
050097 New 2018
050098 New 2018
050099 New 2018
050100 New 2018
050102 New 2018
050104 New 2018
050106 New 2018
050108 129, 130, 131, 132, 133
050112 New 2018
060008 613
060010 614
060012 614
060014 614
060016 613
060018 613
060020 613
060020A 613
060026 614
060027 614
060028 614
060029 614
060030 614
0702/15 161, 257
0706/14 162
0712/20 176
0714/20 176
0720/B 257
0722/B 257
0726/17 254
0730/18 248
0732/20 247
0736/15 199, 243
0738/15 243
0740/15 244
0742/15 247
0800 606
0800A 606
0800B 606
0950G 607
0950GA 607
0960G 607
0962G 607
0990 402
0992 402
0994 425
10004 107
10007 107
10020E 118
10035E 118
10070 115
10070B 116
10070E 118
10070W 117
10100 146
10101C 25
10101C4 411
10101C5 411
10101G 42
10101L 35
10101TR 39
10102 3
10102GL 3
10102H 36
10103 4
10103A 41
10103B 26
10103D 26
10103FA 122
10103G 42
10103GL 41
10103L 27
10103N 28
10103NP 38
10103P 33, New 2018
10103R 26
10103T 135
10103TR 39
10103X 4
10105 4
10105A1 6
10105AC 19
10105AL 13
10105ALG 13
10105AR 19
10105B 49
10105C4 412
10105CJ 15
10105D1 8
10105D2 8
10105D3 10
10105D4 9
10105D5 9
10105D7 10
10105DG 8
10105E 151
10105F 12
10105GL/AL 17
10105GL/BL 20
10105GL1 17
10105GL2 17
10105GT1 21
10105GT2 21
10105GU 4
10105K 143
10105L 12
10105M New 2018
10105MD New 2018
10105Q 15
10105R 16
10105R1 14
10105R2 14
10105RM New 2018
10105T 7
10105TG 7
10105TR New 2018
10105U 5
10105V 16
10105W 33
10105X 4
10105XS 4
10106D 29
10106DF 32
10106G 42
10106NA 573
10106P 37
10106PF 32
10107 137
10107B 154
10107BT 40
10107C 41
10107CA 139
10107CD 141
10107D 29
10107DA 31
10107DB 35
10107DC 31
10107DL 35
10107H 36
10107K New 2018
10107KD 150
10107P New 2018
10107R 41
10107T 135
10107V 117
10107W 33
10107WD 35
10107WP New 2018
10108F 121
10108FA 122
10108FD 134
10109FD 153
10110C 138
10110CA 139
10110G 155
10110K 143
10110T 9
10112/G/D 147
10112/G/W 148
10112C 31
10112D 149
10112E 30
10112F 121
10112FA 122
10112H 31
10112KD 150
10112L 30
10112LR 30
10112P 34
10112TP 30
10113A 152
10113B 154
10113M 29
10113P 34
10115 137
10115BF 109
10115CA 139
10115CD 141
10115E 151
10115G 155
10115T 135
10116FD 134
10118D 149
10118FA 123
10120 146
10120C 138
10120CA 140
10120F 121
10120FD 153
10120G 156
10120K 144
10122FD 134
10124 137
10124T 136
10125B 154
10128/G/D 147
10128/G/W 148
10130A 151
10130C 138
10130CA 140
10130CD 142
10130CR 138
10130FA 123
10130G 156
10130K 144
10130KA 144
10130T 136
10140CD 142
10140F 123
10140P New 2018
10142 146
10148PE 124
10150 115
10150B 116
10150E 118
10150G 156
10150T 152
10160CA 140
10215D 110
10220BF 109
10220CF 110
10220D 110
10220E 110
10220GT1 112
10220T 111
11070AB 163
11070D 159
11070E 176
11070EA 163
11070R 168
11070RD 159
11070S 175
11070TR 170
11100R 167
11101B 77
11101D 76
11101W 77
11102 76
11103A 45
11103AB 55
11103B 75
11103BD 95
11103C 47
11103D 93
11103E New 2018
11103L 81
11103LB 81
11103LC 78
11103LW 81
11103N 83
11103P 96
11104K New 2018
11105 45
11105A1 62
11105AB 53
11105ABG 54
11105AC 55
11105AL 55
11105B1 62
11105C 47
11105CD 49
11105CDG 59
11105CF 47
11105CGU 48

11105D4 59
11105D5 63
11105D6 63
11105D7 62
11105D8 63
11105DT 59
11105DTR 71
11105E 59
11105GT4 70
11105GT5 70
11105GU 46
11105GU3 50
11105M New 2018
11105N 66
11105S 61
11105TG 59
11105TR 71
11105U 57
11105UA 57
11105UB 57
11106A 87
11106B 102
11106K 90
11106KD 90
11106LB 180
11106PF 103
11106R 168
11107 84
11107A 89
11107B 84
11107BT 104
11107C 102
11107D 97
11107DA 95
11107DL 92, New 2018
11107E 195
11107F 101
11107FD 95
11107H 98
11107K New 2018
11107M 101
11107P 97
11107R 196
11107RA 200
11107WD 96
11108M 100
11109E 101
11109KD 90
11109L 180
11109LA 102
11110A 87
11110AB 171
11110B 200
11110C 99
11110D 159
11110F 198
11110GT1 173
11110GT4 173
11110H 176
11110N 160
11110R 168
11110TR 170
11110U 162
11112 85
11112A 89
11112C 89
11112D 93
11112DL New 2018
11112E 92
11112F 198
11112H 91
11112L 180
11112T 104
11112TA 94
11112TR 189
11113L 89
11113M 100
11113V 181
11114R 196
11115B 186
11115C 193
11115E 195
11115F 197
11115RA 200
11115TR 190
11118A 182
11118H 197
11118L 180
11118TR 189
11120B 186
11120C 193
11120F 198
11120TR 190
11120U 161
11125B 185
11125F 197
11125R 196
11125RA 200
11126V 181
11130B 199
11130BT 179
11130C 193
11130F 198
11135L 199
11138 183
11140B 186
11140L 199
11140TR 190
11150A 185
11150B 186
11150E 176
11150L 175
11150TR 170
11150U 162
11170U 161
11207M 101
11207WD 96
11303L 81
12101 322
12105AB 290
12105AC 290
12105B 289
12105D 287
12105E 287
12105M New 2018
12106C 325
12106CA 326
12107AL 326
12107F 319
12107K New 2018
12107KA New 2018
12107M 317
12108FD New 2018
12109LA 319
12109M 317
12110D 325
12111L 326
12112LA 319
12115L 327
12115LA 328
12116FD New 2018
12120 291
12122 227
12124 291
12125L 327
12125LA 328
12126 291
12130LA 328
12132 291
12134 291
12135L 327
12138G 288
12140 288
12140G 288
12142 288
12150S 357
12205B 289
12211L 326
12220 357
12226S 357
20020 545
20022 545
20030 546
20032 215, 546
20034 546
22000 541
36255B 277
36455B 277
38001A 230
38002A 230
38005A 230
38006A 230
38006B 230
38006C 230
38007A 230
38007B 230
38007C 230
38008 229
38016 404
38018 404
38101A 228
38101B 228
38101C 228
38101D 228
38102A 228
38102B 228
38102C 228
38103 227
38104B 224
38104L 225
38105 227
38108B 224
38108F 274
38108G 393
38108J 285
38110 227
38113F 274
38114B 224
38114C 391
38114CE 390
38114D 391
38114DE 390
38114E 391
38114EE 390
38114G 391
38114GE 390
38115C 389
38115L 225
38118E 483
38118L 484
38118LA 486
38120C 389
38120E 488
38120L 280
38121D 392
38121E 392
38124 393
38128H 276
38135A 273
38135L 280
38136E 483
38136L 484
38136LA 486
38136P 485
38136R 487
38140 403
38140E 488
38145LA 486
38154A 279
38154M 279
38158E 483
38158L 484
38158P 485
38165E 488
38207L 226
38215L 226
38218E 483
38218P 485
38220E 488
38230L 226
38236D 278
38236DF 278
38236DL 278
38236E 483
38236L 484
38236P 485
38236R 487
38240E 488
38248L 280
38258D 278
38258DF 278
38258E 483
38258L 484
38258P 485
38265E 488
40003 269
40003A 265
40003R 265
41002 269
41002A 265
41004 269
41004A 266
41004B 268
41008 269
41008A 266
41008B 268
41010 269
41010A 266
41012 270
41012A 267
41012B 268
41016 270
41016A 267
41016B 268
41018 270
41020 266, 270
41022 270
41022A 267
41024A 267
41026R 267

41030 265
50070B 116
50101 25
50103GT4 40
50103L 27
50104G 429
50105ALG 13
50105AR 19
50105D 11
50105D7 10
50105GL 18
50105GL1 18
50105GL4 20
50105GT1 22
50105GT2 22
50105K 145
50105M New 2018
50105MA New 2018
50105R 16
50105RM New 2018
50105T 7
50105TG 7
50105U 5
50108F 125
50108FA 127
50110K 145
50113 429
50113/../2/ELE 429
50115BF 109
50116F 125
50116FA 127
50120K 145
50122F 126
50122FA 127
50126AF 113
50130F 126
50130FA 128
50130K 145
50140AE 129
50140AW 132
50140E 129
50140W 132
50142AF 114
50143F 130
50148AE 130
50148AU 131
50148E 130
50148PE 128
50148RE 133
50148U 131
50150 116
50150B 116
50160E 133
50205D 11
50220BF 109
50220GT1 112
50220T 111
50242AF 114
50342AF 114
50401L 27
50601L 27
51010TR 72
51020TR 72
51070 163
51100R 167
51100TR 169
51101AL 79
51101B 79
51101W 79
51103 52
51103AB 56
51103L 82
51103LB 82
51103LC 78
51103LW 82
51105 52
51105AB 53
51105ABG 54
51105AL 56
51105B 65
51105B1 64
51105CD 49
51105CDG 60
51105CGU 48
51105D 60
51105D5 63
51105D7 64
51105DG 60
51105F 69
51105GA 51
51105GT4 70
51105GU 51
51105N 66
51105R 67
51105T 68
51105TA New 2018
51105TG 60
51105TR 71
51105U 58
51105UA 58
51106A 88
51107 84
51109B 187
51110 165
51110A 88
51110AB 172
51110C 99
51110GT1 174
51110N 160
51112 86
51112E 92
51112H 91
51112TA 94
51115TR 191
51120 184
51120B 187
51120TR 191
51125 183
51125A 185
51138 183
51140B 187
51140TR 191
51145 194
51150 163
51200AR 167
51200R 167
51200TR 169
51201AL 80
51205ABG 54
51205B 65
51205N 66
51209B 188
51210 165
51210AB 172
51210N 160
51212E 92
51215TR 192
51220 184
51220B 188
51220TR 192
51225 183
51240B 188
51250K 166
51300AR 167
51300R 167
51301AL 80
51305B 65
51310AB 172
51310N 160
51400AR 167
51400R 167
51401AL 80
51401R 167
51450K 166
60000 606
60001 322
60002 323
60004 322
60006 315
60008 320
60008A 320
60010 322
60012A 353
60012B 353
60014C 353
60016B 353
60032 321
60034 321
60038 286
60040 286
60042 286
60044 314
60046 314
60048 314
6005 294
60050 313
60052 313
60054 286
60056 293
60106 394
60106A 394
60107A 395
60107B 395
60107C 396
60107D 396
6012 294
6017 293
6017A 293
6017G 294
60204 394
6022 294
6026A 336
6028 321
6030 293
61016 417
61016A 417
61024 416
61026 416
61036 420
61038 420
61038B 420
61040 424
61042A 415
61042B 415
61044 414
61044A 414
61046 413
61058A 419
61066 422
61066T 422
61068 421
61068B 421
61070 421
61072 New 2018
62010 359
62010A 359
62012 360
62014 360
62018 364
62018A 364
62018AF 369
62018F 369
62022A 362
62022B 362
62022C 362
62024A 361
62024B 361
62024C 361
62025 385
62030F 370
62038F 370
62046F 370
62100 379
62102 358
62104 358
62110 284
62110A 284
62110B 283
62115F 365
62118D 384
62122F 366
62125D 384
62130AF 366
62130F 365
62132N 383
62135NA 383
62140AE 367
62140AF 368
62140F 368
62140RE 367
62140RF 368
62142N 383
62142NB 386
62150D 384
62150J 405
62200 379
62210A 284
62210B 283
62300 379
62310A 284
62401AL 320
63001 400
63002 400
63003 400
63005 400
63018A 401
63025L 408
63028 426
63028A 426
63028B 426
63030L 408
63034 408
63036 399
63038 399
63070D 406
63100A 490
63100E 492
63100U 491
63105M New 2018
63150C 407

63150E 492
63200A 490
63200E 492
63200U 491
63270 405
64002 381
64004 381
64006 381
64008 382
64010 382
65008T 256
65009T 250
65010B 250
65010T 250
65011T 255
65012T 255
65013T 256
65016T 255
65019T 255
65020T New 2018
65022T 262
65042T 249
65100/BASE 266
65101A 315
65102 320
65105A 423
65107 317
65110A 318
65110B 318
65110C 318
65110D 318
65110E New 2018
65110F New 2018
65110P New 2018
65111AT 261
65112T 251
65114T 251
65116T 251
65118AT 261
65138 413
65140 413
65226T 248
65234T 258
65235T 258
65305B 423
65510T 249
65514T 257
65518T 260
65519T 260
65520T 259
65532T 257
65534T 257
65608T 239
65610AT 240
65610B 239
65611T 241
65612T 241
65614T 242
65616T 242
65618T 247
65619T 247
65620AT 240
65620T 245
65620T2 245
65620TA 245
65622T 248
65624T 247
65626T 246
65628T 246
65630T 246
65632AT 243
65632BT 243
65632CT 243
65632T 243
65638T 247
65640AT 244
65640BT 244
65640T 244
65642AT New 2018
65642BT New 2018
65642CT New 2018
65719T 252
65736T 252
65738 316
65738A 316
65834T 253
65835T 253
65934T 254
65935T 254
67002 473
67004 473
67010W 475
67012 474
67014 474
67030 310
67032 309
67034 468
67036 468
67042 465
67056 473
67060 459
67090 460
67092 460
67094 461
67098 461
67100 462
67102 462
67104P 305
67106P 305
67116 352
67118 352
67122 351
67124 341
67126 351
67128 351
67128/C/D 453
67130 299
67130A 300
67130C 299
67130D 300
67130E 299
67130F 300
67132 301
67132A 302
67132C 301
67132D 302
67132E 301
67132F 302
67134A 306
67134E 306
67134F 306
67136 332
67136E 331
67138 332
67138A 332
67138C 330
67138D 330
67138E 331
67138F 331
67146 349
67160 297
67162 292
67163 297
67163A 297
67164 292
67170 347
67172 347
67174 350
67176 350
67180 463
67182 463
67196A 458
67196B 458
67196BG 458
67196C 458
67198AG 453
67198G 453
67204 303
67204B 303
67206 303
67208 304
67208B 304
67210 304
67214 308
67216 308
67216B 308
67220A 354
67222B 296
67226 295
67228 295
67234 466
67234A 466
67236 465
67236A 465
67238 465
67238A 465
67244 470
67246 469, 470
67248 470
67250 470
67250A 469
67256 467
67270 464
67272 464
67274 337
67274A 337
67274B 338
67274C 338
67280 371
67280A 371
67280AL 372
67280AN 373
67280ANE 373, 513
67280BN 373
67280N 373
67282 371
67282A 371
67282AN 374
67282ANE 374, 513
67282BN 374
67282N 374
67284 363
67284L 363
67284LA 363
67284LE 513, New 2018
67284R 363
67286 475
67290 475
67292 307
67298 337
67300 292
67302 296
67302A 296
67304 341
67308 348
67316A 380
67328 307
67328A 307
67332 321
67334 354
67336 354
67340 339
67340A 339
67342 333
67344 471
67346 324
67354 348
67356 333
67358 472
67359 345
67359A 346
67359B 346
67360 345
67360A 346
67362 375
67362A 375
67362B 334
67362C 334
67363 375
67363A 375
67364 323
67366 377
67366E 377, 513
67368 377
67368M 377
67370 378
67372 378
67374 333
67374A 333
67376 336
67376A 336
67378 335
67378A 335
67380 329
67380A 329
67384 376
67384A 376
67386A 342
67386C 342
67388A 344
67388B 344
67388C 344
67390 372
67392 334
67394 343
67394A 343
67394B 343
67396 342
67396A 342
67398 340
67398A 340
67398C 340
67400A 298
67400B 298
67402 386
67404 385
67406 477
67406A 477
67406B 477
67406C 477

67406D 478
67406E 478
67408 476
67410 468
67410A 468
67414 New 2018
67416 New 2018
67418 New 2018
67420 New 2018
67420A New 2018
67420B New 2018
67422 New 2018
67422A New 2018
67426 New 2018
67426A New 2018
67428 New 2018
68001 437
68002 437
68003 437
68004 435
68004A 435
68005 432
68005/BOX 432
68006 431
68007 431
68008 432
68008/BOX 432
68012 441
68016 441
68022 441
68024 441
68030 436
68032 436
68038 431
68044 442
68046 434
68048 434
68050 434
68052 433
68052A 433
68054 430
68056 430
68058 438
68058A 438
68060 438
68062 440
68064 440
68066 440
68068 439
68068A 439
68068C 439
69002 448
69002/RGB 448
69003 448
69006 449
69006G 450
69008 449
69008G 450
69012 443
69016 446
69016A 446
69016B 446, New 2018
69022 447
69024 447
69026 444
69028 443
69032 480
69034 480
69036 480
69038 443
69040 444
69042 445
69042A 445
69042B 445
69044 445
69046G New 2018
69048G New 2018
70020 609
70026 608
70028 608
70030 609
70032 610
70034 610
70036 610
70038 610
70080 507
7008A 454
7008L 454
70090 507
7010 454
70100 507
70101 508
70102 508
70104 509
70105 509
70108 509
7010A 454
7010P 606
70110 510
7020 493
7022 494
7028A/../RGB 495
7028A/AN/.. 500
7028A/G/.. 496
7028AB 500
7028AE 497
7028AG 503
7028AR 495
7028B/../RGB 495
7028B/AN/.. 500
7028B/G/.. 496
7028BE 497
7028BG 503
7028BGE 503
7028BP 496
7028BR 495
7028C 500
7028CG 503
7028E 500
7030 494
7032 496
7033 496
7034B 499
7034C 499
7034D 499
7036 494
7038 498
7038E 498
7040 498
7040E 498
7046 455, 456
7047 455, 456
7048 497
7050A 504
7050B 504
7050C 504
7052 457
7052A 457
7054A 506
7054B 506
7056 489
7056A 489
7056B 489
7058 505
7058R 505
7060 497
7062A 501
7064 502
7066 502
7101AL 553
7101L 553
7102ALG 551
7102G 549
7102GFSR 549
7102LG 551
7103 553
7103A 553
7103ALG 551
7103ALG/DW 552
7103ALGD 552
7103ALGT 552, New 2018
7103BLG 550
7103LG 550
7103SR 553
7104G 549
7105 553
7105BLG 550
7105SR 553
7106ALG 551
7106ALGD 552
7106GPH 549
7107 553
7109ALG 551
7201G 554
7235/30 554
7301 555
7301G 557
7301GD New 2018
7303 555
7303G 557
7304A 556
7304AG 558
7304G 557
7304WG 558
7304WGD 560
7305/RGB/30 555
7305AG 558
7305BG 559
7305CG/C/120 561
7305CG/W 561
7305G 557
7305G/RGB New 2018
7305M 563
7306A 566
7306B 566
7306CG 561
7306CG/BL 561
7306CGD 562
7306E 565
7306G 558
7306G/C New 2018
7306GC New 2018
7306GCD New 2018
7306GD 560
7306HD 566
7306K 556
7306KGD 562
7306LG 559
7306LGD 560
7307BG 559
7307CG 559
7307DGD 562
7308G 558
7308GD 560
7309AG 569
7309AGD 570
7309AM 563
7310H 566
7312AG 569
7312AGD 570
7312M 563
7315CG 569
7315G 569
7315GD 570
7320/38SR 555
7335G 564
7350 555
7350/38SR 555
7350G 564
7350G/38SR 564
7375R/24 568
7450B 565
7510AR 572
7510R 572
7511R 568
7512A 571
7512C 572
7512D 574
7513A 571
7513AGD 570
7515A 571
7517A 571
7520R 568
7521R 573
7524BD 574
7524D 574
7604 576
7605L 575
7606 577
7607A 576
7610 577
7610A 577
7610A/C 576
7610L 575
7612L 575
7613C 577
7615 577
7615A 577
7615L 575
7630A 577
7650A 577
7800 233
7800/RGB 233
7802 234
7804 234
7806 234
7807 234
7808 234
7810 235
7810/RBL 235
7810/RGB 235
7812 236
7814 236
7815 236
7815B 236
7816 236
7817 236
7818 236
7819 236
7820 207

7820A/RGB 216
7820AW 208
7820C/A 216
7820W 208
7821 205
7821W 206
7822 205, 207
7823 204
7824 205, 207
7825 211
7826 206, 208
7827 206, 210
7828 208
7830 209
7830/DW 215
7830/RGB 209
7830/RGBW 209
7830A/RGBW 216
7830W 210
7830W/RGB 210
7831 205
7831W 206
7832 205, 209
7832/RGB 209
7834 205, 209
7834/RGB 209
7835 211
7835C 211
7835P 211
7835W 212
7836 217
7836A/C 217
7836A/P 217
7836B/P 219
7836T 219
7837 211
7838M 218
7840 203
7842 203
7845 213
7850 231
7850C 231
7850E 231
7850F 231
7850P 231
7860 232
7860C 232
7860E 232
7860F 232
7860P 232
7870 213
7875 213
7880 214
7885 214
7900C 218, 220
7900P 218, 220
7900R 218
7901 217
7901TR 223
7902 217
7902R 222
7904 217
7904ATR New 2018
7904R 222
7904TR 223
7906 220
7906A 220
7906B 220
7906C 220
7906D 220
7906R 222
7906TR New 2018
7908 219
7908A 219
7908B 219
7910 218
7910A 218
7910AR 222
7910R 222
7912 218
7912A 218
7912R 222
7914R 223
7916 221
7918 217
8002GA 602
8003GC 602
8003M 599
8007 600
8007/W 601
8007G 600
8007M 599
8010L 602
8015 601
8015G 602
8015GC 602
8107 593
8213 593
8213/../4SR 593
8218 593
8218/../4SR 593
8218A 594
8226/../4SR 593
8318 594
8332 594
8342 594
89002 513
89003/EXT 605
89003A/EXT 605
89004 527
89004A 529
89004C 529
89005/EME 516
89006 527
89006/EXT 605
89006A 529
89006A/EXT 605
89008 527
89008W 531
89009/EME 517
89010D 542
89011D 528
89012D 528
89015 527
89015A 529
89015AT 530
89015T 528
89015V 532
89015W 531
89020 527
89020/ELE 522
89020A/ELE 522
89020B/ELE 522
89020L 537
89024D 544
89024E 544
89027D 536
89030A 529
89030C 529
89030D 536
89030V 532
89030VD 535
89030VL 533
89030W 531
89030WD 535
89036A/DMX 543
89040 129
89045L 537
89048 124, 128, 130, 131, 133, 152
89048T 124, 128, 130, 131, 133, 152
89050D 536
89050L 124, 128, 129, 130, 131, 133, 152, 537
89050V 532
89060 133
89060VL 533
89060VN 534
89060WD 535
89060WP 538
89070/ELE 522
89075V 532
89075VD 535
89075VL 533
89075L New 2018
89075W 531
89076D 528
89100 542
89100V 532
89100VL 533
89100VN 534
89100VNT 535
89100VP 538
89103 524
89106E 521
89110E 521
89113/ELE 523
89142/ELE 523
89142/ELE/DIM 523
89143F 518
89150/ELE 522
89150V 532, New 2018
89150VL 533, New 2018
89150VN 534
89150VP 538
89200VN 534
89200VP 538
89200WN 531
89213/ELE 523
89242/ELE 523
89242/ELE/DIM 523
89300 542
89302 545
89302A 545
89350VN 534
89400 514
89402 515
89404 515
89406 514
89406R 514
9009L 598
9011L 597
9012 595
9012L 598
9018L 598
9021L 597
9022L 598
9026L 597
9032L 598
9407G 549
9432 591
9465 591
9816 596
9821 596
9828 596
9838 596
9922L 595
9932L 595
9940L 595
9955A 595
9C002/F 418, New 2018
9C02R 588
9C04A 579
9C05BD 580
9C05N 579
9C05ND 580
9C05RD 587
9C06B 579
9C06BD 580
9D03 594
9F01 578
9F07 578
9F07L 578
9F07LD 578, New 2018
9F13 578
9G01 589
9G03R 588
9G03RAD 587
9G04M 589
9G04R 588
9G04RA 588
9G04RAD 587
9G06M 589
9G06R 588
9G06RD 588
9G06RD/A/E 587
9G07B 581
9G09/RGBW 583
9G09P 585
9G10L 583
9G10M 583
9G10V 583
9G12B 581
9G12BD 582
9G12D 582
9G15L 584
9G20L 584
9G20LD 584
9G20N 586
9G20P 585
9G30N 586
9G30P 585
9G50N 586
9G80N 586
9R07 592
9R08 592
9R16 567
9R23 567
9R27 567
9S07G 549
9S13 590
9S23 590
9T05RD 587

HEADQUARTERS

CYPRUS

ONE LIGHT LIMITED
web / www.1-light.eu
email / one@1-light.eu
tel / 0035722450833

UK

ONE-LIGHT (UK) LIMITED
web / www.1-lightuk.com
email / info@one-lightuk.com
tel / 00448445561515

AGENTS / DISTRIBUTORS

AUSTRIA

SELUX LICHTSYSTEME GmbH
web / www.leuchtenshop.at
email / office@selux.at
tel / 00431615469011

BAHRAIN

ELAMES LIGHTING B.S.C. (C)
web / www.behzad-group.com
email / lightingadmin@behzad-group.com
/ lighting@behzad-group.com
tel / 0097317701166

BULGARIA

ATG PLC
web / www.atg.bg
email / sales@atg.bg
tel / 0035929624655

CANADA

SOLAVANTI LIGHTING
web / www.solavantilighting.com
email / sales@solavantilighting.com
tel / 0012142219405

CHILE

HOME CONTROL S.A.
web / www.homecontrol.cl
email / iluminacion@homecontrol.cl
tel / 0056229502000

CROATIA

ART-RASVJETA D.O.O.
web / www.art-rasvjeta.hr
email / info@art-rasvjeta.hr
tel / 0038513697901

CYPRUS

DIMCO PLC
web / www.dimco.eu
email / dimco@dimco.eu
tel / 0035722446565

CZECH REPUBLIC

ATEH spol. s r.o.
web / www.ateh.eu
email / ateh@ateh.eu
tel / 00420777304460
/ 00420777304463

DENMARK

LARENO AS
web / www.lareno.dk
email / info@lareno.dk
tel / 004556276466

UNI-KA TEKNISK BELYSNING A/S
web / www.uni-ka.dk
email / info@uni-ka.dk
tel / 004586495018

GERMANY

DK-light gbr
web / www.1-light.de
email / info@1-light.de
tel / 00492871220702

H+B BELEUCHTUNGSSYSTEME GmbH
web / www.hplusb.eu
email / info@hundb.de
tel / 0049202280820

GHANA

DEBBAS GHANA LIMITED
web / www.debbas.com
email / jsaadeh@debbas.com
tel / 00233242666600

GREECE

ZAMPELIS SA
Web / www.zambelislights.gr
email / info@zambelislights.gr
tel / 00302299063519

HUNGARY

REVOLUM ENGINEERING ZRT
web / www.revolum.hu
email / info@revolum.hu
tel / 003618982824
mob / 0036209670746

ICELAND

PFAFF
web / www.pfaff.is
email / esm@pfaff.is
tel / 003544140400

INDIA

DEBBAS LIGHTING INDIA Pvt. Ltd
email / bharti@debbas.in
tel / 00911244643050

IRELAND

RICHMOND ELECTRICAL WHOLESALE LTD
web / www.rew.ie
email / accounts@rew.ie
tel / 0035316527036

ITALY

DIMCO ITALIA SRL
web / www.dimcoitalia.com
email / info@dimcoitalia.it
tel / 0039054583336

LEBANON

AYANIAN GROUP S.A.L
web / www.ayaniangroup.com
email / info@ayaniangroup.com
tel / 009613788886

MALTA

VCT LTD
web / www.vct.com.mt
email / info@vct.com.mt
tel / 0035621432571

MAURITIUS

MUBELO ELECTRICAL LTD
web / www.mubelo.mu
email / mubelo.electrical@orange.mu
tel / 002306985200

MOLDOVA

TOP LIGHT SRL
web / www.smart-home.md
email / info@smart-home.md
tel / 0037378202020

MOROCCO

SOCIETE LED'S PLAY
web / www.1-light.eu
email / f.bahechar@outlook.com
tel / 00212619994444

NETHERLANDS

STUDIO Light for all
web / www.lightforall.nl
email / info@lightforall.nl
tel / 0031548521166

NIGERIA

PROJECTS DEBBAS NIGERIA LIMITED
web / www.debbas.com
email / zsalameh@debbas.com
tel / 002348037777749

PORTUGAL

DISLAMP Lighting
web / www.dislamp.pt
email / encomendas@dislamp.pt
tel / 00351234644148

SAUDI ARABIA

AL DARS EST
web / www.al-dars.com
email / info@al-dars.com
tel / 00966114664545
mob / 00966554647487

SERBIA

KINETIC Lighting d.o.o.
web / www.kinetic-lighting.rs
email / office@kinetic-lighting.rs
tel / 00381638038767

LIGHT DESIGN CENTER
web / www.ldc.rs
email / i.hasanovic@ldc.rs
tel / 00381112630799

LIGHT SYSTEMS DESIGN DOO
web / www.lsdesign.rs
email / snezana@lsdesign.rs
tel / 00381213006445

SELBI LIGHTING d.o.o.
web / www.selbi.rs
email / office@selbi.rs
tel / 00381113392636

SLOVAKIA

ATEH spol. s r.o.
web / www.ateh.eu
email / ateh@ateh.eu
tel / 00420777304460
/ 00420777304463

SLOVENIA

DIMCO Trade d.o.o
web / www.dimco-svetila.si
email / info@dimco-svetila.si
tel / 0038617296422

SPAIN

GRUPO MCI
web / www.grupo-mci.com
email / nacional@grupo-mci.com
tel / 0034936302800

SUDAN

CANDACE Investment
web / www.candacegroup.com
email / tarig.atti@candacegroup.com
tel / 00249183278834

NORTY TRADING
web / www.nortiinvest.com
email / w.asim@nortiinvest.com
tel / 00249900388090

SWITZERLAND

AXTRON GmbH
web / www.axtron.ch
email / info@axtron.ch
tel / 0041527215858

ELEVITE AG
web / www.elektro-material.ch
email / info@elevite.ch
tel / 0041564197070

IDEE LUMIERE
web / www.ideelumiere.com
email / ideelumiere@gmail.com
tel / 0041763746168

UAE

PROJECTS AND SUPPLIES co. ltd l.l.c.
web / www.projectsandsupplies.com
email / mailbox@projectsandsupplies.com
tel / 0097142898828

UK

ONE-LIGHT (UK) LIMITED
web / www.1-lightuk.com
email / info@one-lightuk.com
tel / 00448445561515

USA

SOLAVANTI LIGHTING
web / www.solavantilighting.com
email / sales@solavantilighting.com
tel / 0012142219405



NOTES



Please note:

Prices are subject to change without notification. ONE Light may change product specifications without notifying customers. ONE Light does not accept any responsibility for mistakes in this catalogue, we strongly advise customers to contact us to confirm specifications. Fitting sizes in catalogue may vary from actual fitting dimensions. Always check the actual fitting before cutting holes. ONE Light may discontinue any item from this catalogue without prior notice. No images or information may be copied or reproduced without written permission from ONE Light.

5 291889 054054 >

one
LIGHT

www.1-light.eu